

**SUMMARY TEST DATA
ON
PVA-500M18G-60-SFF**



Customer:	Tested By: K. Mansfield
Job No:	Date: Friday, April 26, 2024
Model No: <u>PVA-500M18G-60-SFF</u>	Temperature: <u>+25° C</u>
Serial No: <u>PL45745/2417</u>	Drawing No: <u>27622543</u> Rev: <u>B1</u>

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	PASS/FAIL	QA QC
1	Frequency Range:	0.5 GHz to 18 GHz	0.5 GHz to 18 GHz	PMI QA4
2	Insertion Loss:	0.5 to 12.0 GHz 4.5 dB Max. 12.0 to 18.0 GHz 5.2 dB Max.	4 dB 4.3 dB See Plot	
3	VSWR:	2.2:1 Max.	1.9:1 See Plot	
4	Attenuation Flatness:	0 - 30 dB ±2.5 dB Max. 30 - 40 dB ±3.5 dB Max. 40 - 50 dB ±4.5 dB Max. 50 - 60 dB ±5.5 dB Max.	±1.14 dB ±1.83 dB ±2.6 dB ±3.99 dB See Plot	
5	Attenuation Accuracy:	0 - 10 dB ±1.0 dB Max. 10 - 20 dB ±1.5 dB Max. 20 - 40 dB ±2.0 dB Max. 40 - 60 dB ±2.5 dB Max.	±0.49 dB ±0.29 dB ±0.72 dB ±0.94 dB See Plot	
6	Rise and Fall Time:	3 us Max.	< 2 µs See Typical Characteristics	
7	RF Power (Operating):	+20 dBm CW Max.	Pass	
8	RF Power (Survival):	+30 dBm CW Max.	Pass	
9	Control:	10 dB / Volt Analog Controlled	10.08 dB / Volt	
10	Power Supply:	+12 VDC @ 250 mA Max. -12 VDC @ 50 mA Max.	+12 VDC @ 110 mA -12 VDC @ 0 mA	PMI QA4

Voltage Control (mV)	Programmed Attenuation (dB)	Attenuation (dB)	Accuracy of Attenuation (dB)	Flatness (± dB)
1500	15	14.9	-0.1	0.6
2500	25	25.4	0.4	0.9
3500	35	35.6	0.6	1.5
4500	45	45.7	0.7	2.2
5500	55	55.6	0.6	3.2

QA/QC Approval: *Cameron Kelley*

Date: 04/26/2024

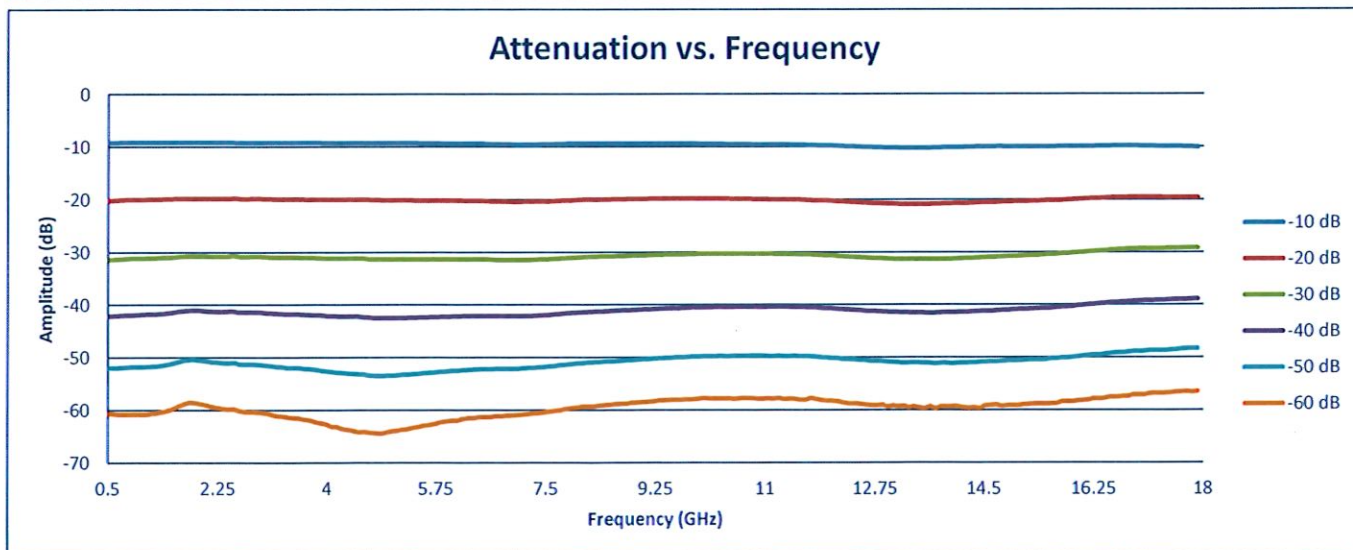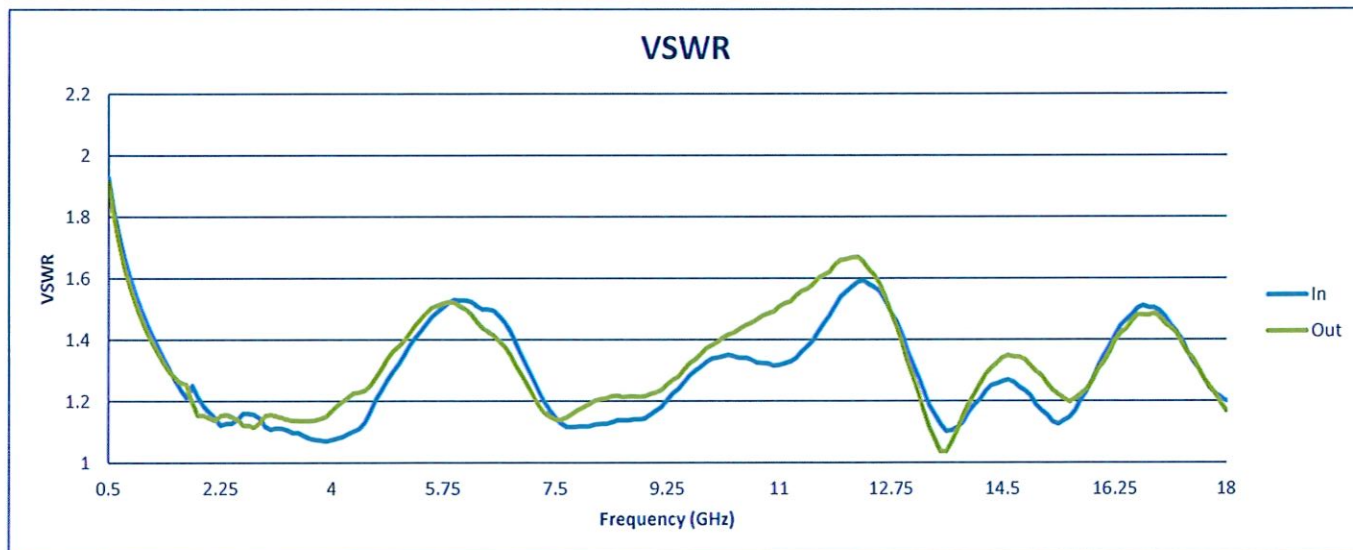

**SUMMARY TEST DATA
ON
PVA-500M18G-60-SFF**

