

**SUMMARY TEST DATA
ON
PVA-500M18G-60-SFF**

Customer: _____
Job No: _____
Model No: **PVA-500M18G-60-SFF**
Serial No: **PL45748/2417**



Tested By: **K. Mansfield**
Date: **Friday, April 26, 2024**
Temperature: **+25° C**
Drawing No: **27622543** Rev: **B1**

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	PASS/FAIL	QA QC
1	Frequency Range:	0.5 GHz to 18 GHz	0.5 GHz to 18 GHz	PMI QA4
2	Insertion Loss:	0.5 to 12.0 GHz 4.5 dB Max. 12.0 to 18.0 GHz 5.2 dB Max.	4.3 dB 5 dB See Plot	
3	VSWR:	2.2:1 Max.	2:1 See Plot	
4	Attenuation Flatness:	0 - 30 dB ±2.5 dB Max. 30 - 40 dB ±3.5 dB Max. 40 - 50 dB ±4.5 dB Max. 50 - 60 dB ±5.5 dB Max.	±1.4 dB ±1.98 dB ±2.54 dB ±3.48 dB See Plot	
5	Attenuation Accuracy:	0 - 10 dB ±1.0 dB Max. 10 - 20 dB ±1.5 dB Max. 20 - 40 dB ±2.0 dB Max. 40 - 60 dB ±2.5 dB Max.	±0.42 dB ±0.49 dB ±0.62 dB ±0.41 dB See Plot	
6	Rise and Fall Time:	3 us Max.	< 2 µs See Typical Characteristics	
7	RF Power (Operating):	+20 dBm CW Max.	Pass	
8	RF Power (Survival):	+30 dBm CW Max.	Pass	
9	Control:	10 dB / Volt Analog Controlled	10 dB / Volt	
10	Power Supply:	+12 VDC @ 250 mA Max. -12 VDC @ 50 mA Max.	+12 VDC @ 110 mA -12 VDC @ 0 mA	PMI QA4

Voltage Control (mV)	Programmed Attenuation (dB)	Attenuation (dB)	Accuracy of Attenuation (dB)	Flatness (± dB)
1500	15	15.4	0.4	0.7
2500	25	25.2	0.2	1.2
3500	35	35.6	0.6	1.7
4500	45	45.1	0.1	2.2
5500	55	55.2	0.2	2.9

QA/QC Approval: *Cameron Kelly*

Date: *04/26/2024*

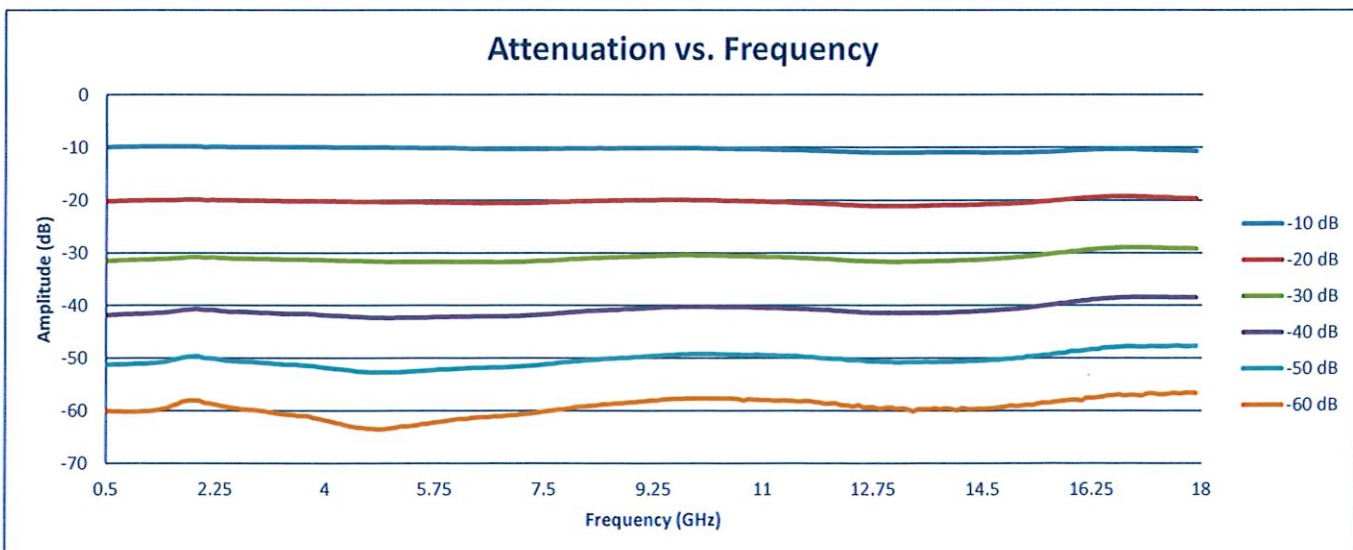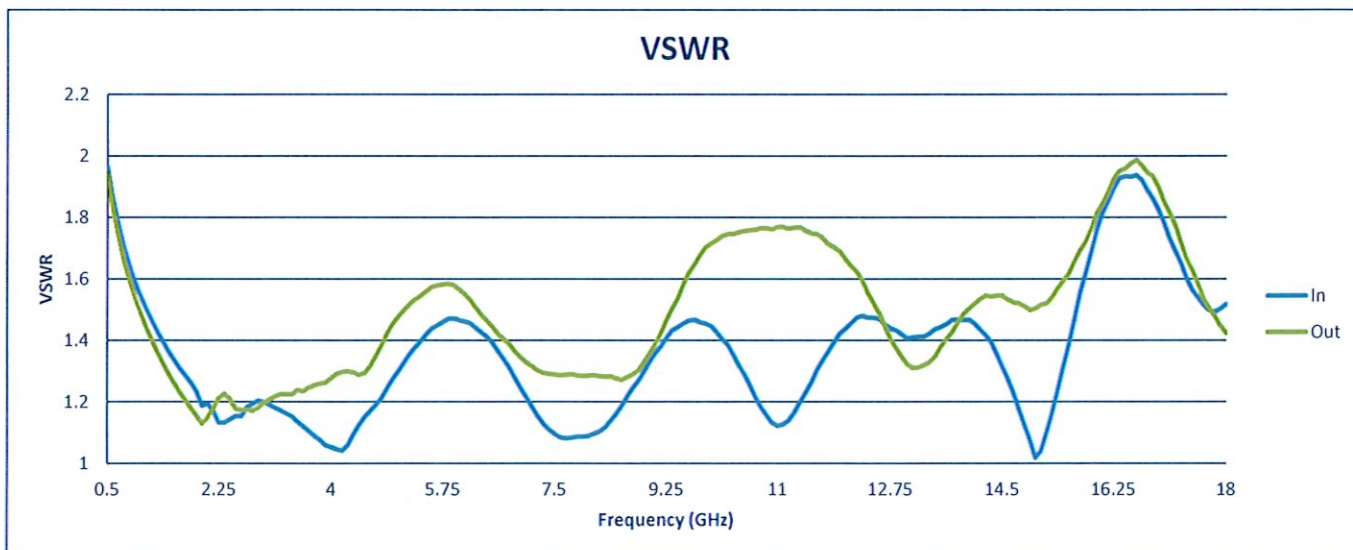

**SUMMARY TEST DATA
ON
PVA-500M18G-60-SFF**

