

**SUMMARY TEST DATA
ON
PVA-500M18G-60-SFF**

Customer: _____
Job No: _____
Model No: PVA-500M18G-60-SFF
Serial No: PL45749/2417

Tested By: K. Mansfield
Date: Friday, April 26, 2024
Temperature: +25° C
Drawing No: 27622543 Rev: B1




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	PASS/FAIL	QA QC
1	Frequency Range:	0.5 GHz to 18 GHz	0.5 GHz to 18 GHz	PMI QA4
2	Insertion Loss:	0.5 to 12.0 GHz 4.5 dB Max. 12.0 to 18.0 GHz 5.2 dB Max.	4.2 dB 4.4 dB See Plot	
3	VSWR:	2.2:1 Max.	1.9:1 See Plot	
4	Attenuation Flatness:	0 - 30 dB ±2.5 dB Max. 30 - 40 dB ±3.5 dB Max. 40 - 50 dB ±4.5 dB Max. 50 - 60 dB ±5.5 dB Max.	±1.3 dB ±1.95 dB ±2.72 dB ±4.06 dB See Plot	
5	Attenuation Accuracy:	0 - 10 dB ±1.0 dB Max. 10 - 20 dB ±1.5 dB Max. 20 - 40 dB ±2.0 dB Max. 40 - 60 dB ±2.5 dB Max.	±0.41 dB ±0.25 dB ±0.99 dB ±1.27 dB See Plot	
6	Rise and Fall Time:	3 us Max.	< 2 µs See Typical Characteristics	
7	RF Power (Operating):	+20 dBm CW Max.	Pass	
8	RF Power (Survival):	+30 dBm CW Max.	Pass	
9	Control:	10 dB / Volt Analog Controlled	10.18 dB / Volt	
10	Power Supply:	+12 VDC @ 250 mA Max. -12 VDC @ 50 mA Max.	+12 VDC @ 110 mA -12 VDC @ 0 mA	PMI QA4

Voltage Control (mV)	Programmed Attenuation (dB)	Attenuation (dB)	Accuracy of Attenuation (dB)	Flatness (± dB)
1500	15	14.9	-0.1	0.6
2500	25	25.3	0.3	1.0
3500	35	35.8	0.8	1.6
4500	45	46.0	1.0	2.3
5500	55	56.0	1.0	3.2

QA/QC Approval: Cameron Kelly

Date: 04/26/2024

SUMMARY TEST DATA ON PVA-500M18G-60-SFF

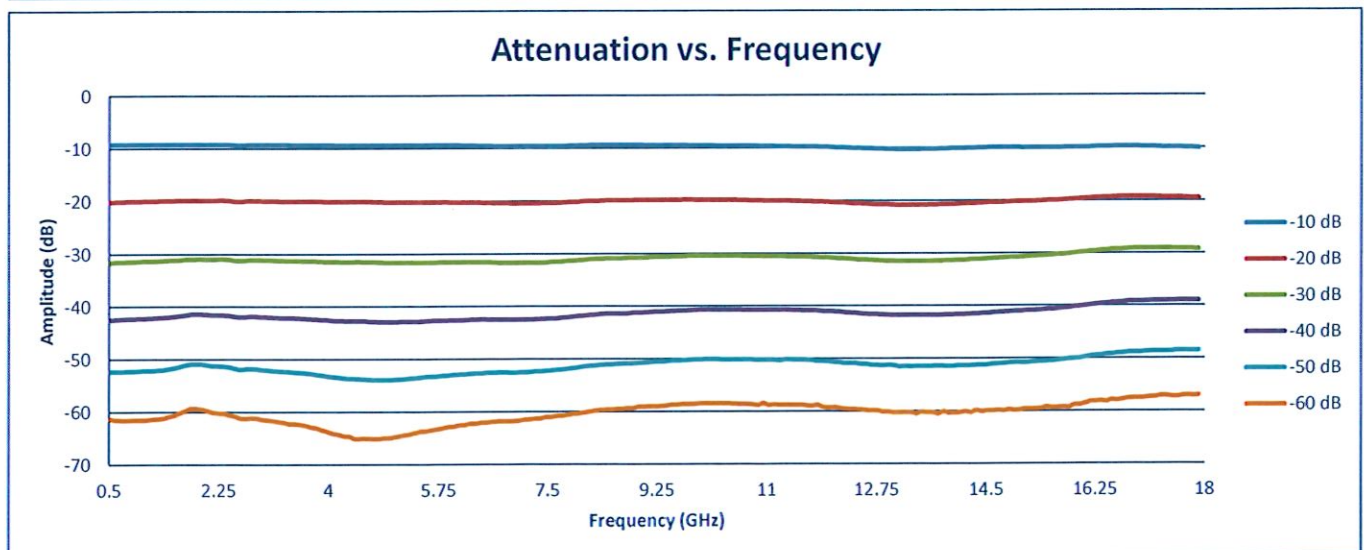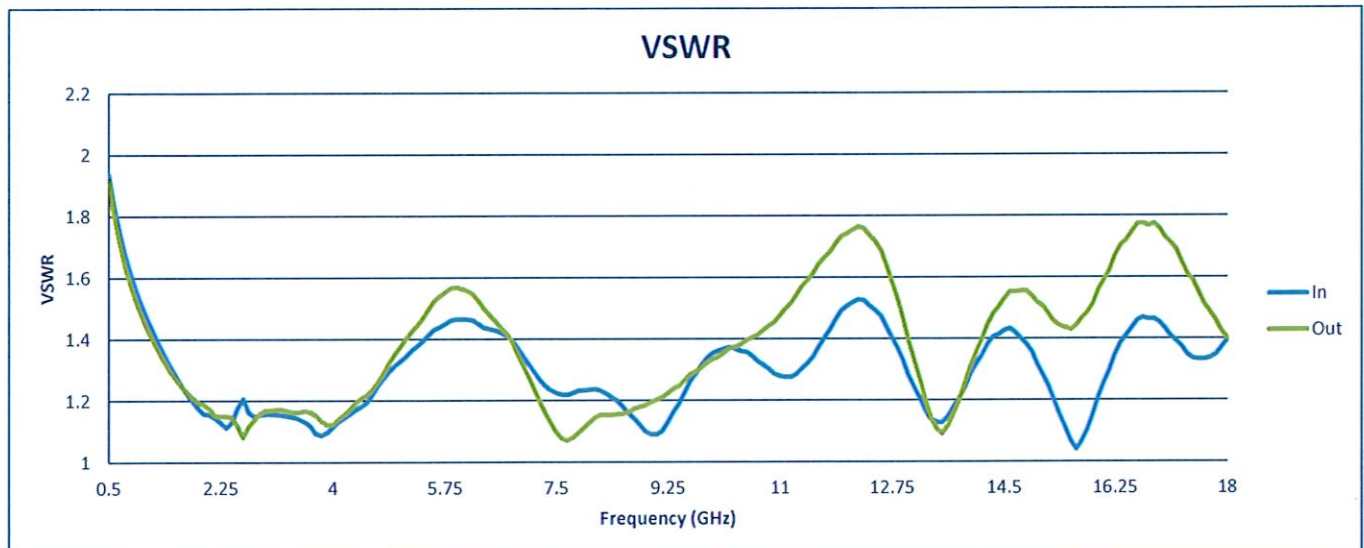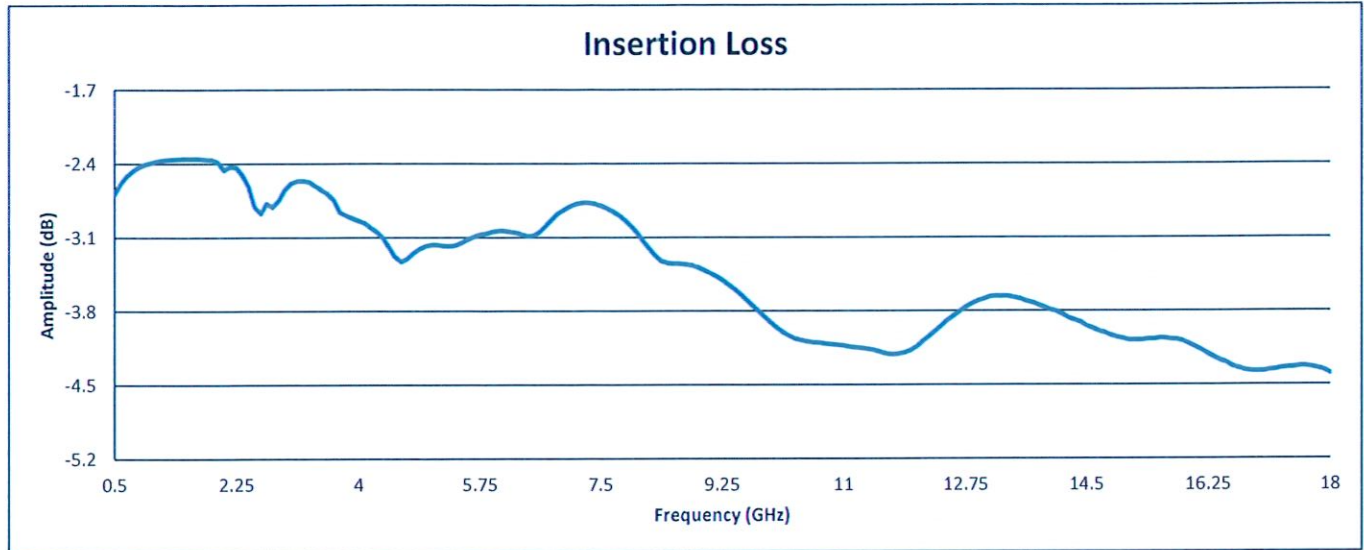

**SUMMARY TEST DATA
ON
PVA-500M18G-60-SFF**

