



**SUMMARY TEST DATA
ON
BPF-2G750M-4G750M-SFF**

Customer: _____
 SO: _____
 Model No: BPF-2G750M-4G750M-SFF
 Serial No: PL47016/2427




Tested By: K Craven
 Temperature: +25
 Date: 7/3/2024
 Drawing No: 27647980 Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency Range	2.75 GHz to 4.75 GHz	2.75 GHz to 4.75 GHz	PMI QA2
2	Insertion Loss	2.5 dB Max.	1.81 dB	
3	VSWR	1.8:1 dB Max.	1.48:1	
4	Rejection	55 dBc Min., @ 2.4 GHz 20 dBc Min., @2.5 GHz 55 dBc Min.,@ 5.05 GHz	55.47 dBc 36.92 dBc 57.83 dBc	
5	Passband Ripple	±2 dB Max.	±0.56 dB	PMI QA2

QA/QC Approval  PMI QA2

Date: 7/17/2024

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@quanticpmi.com

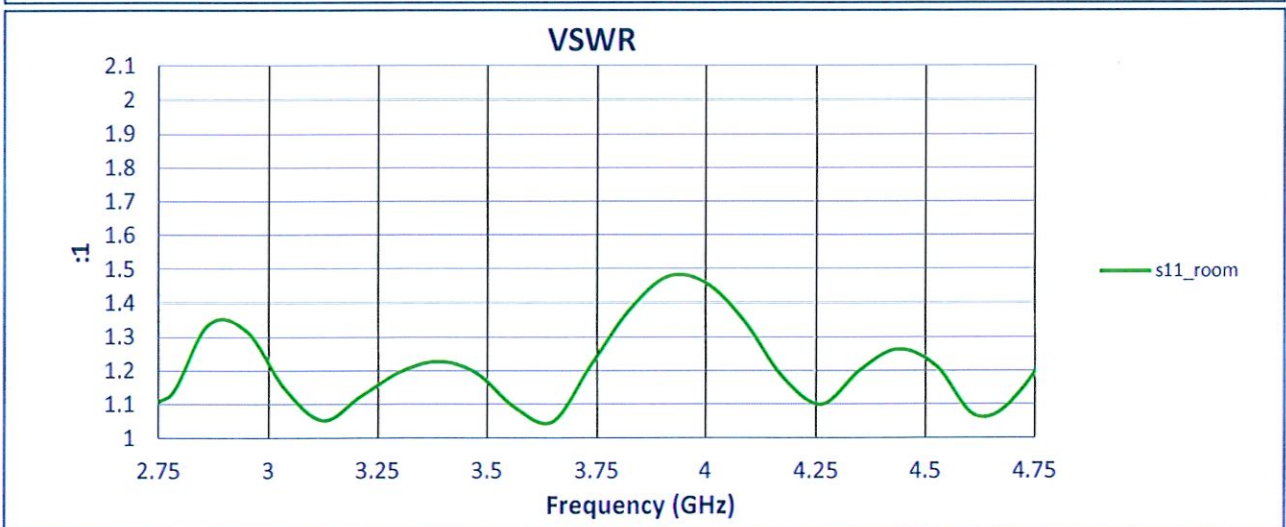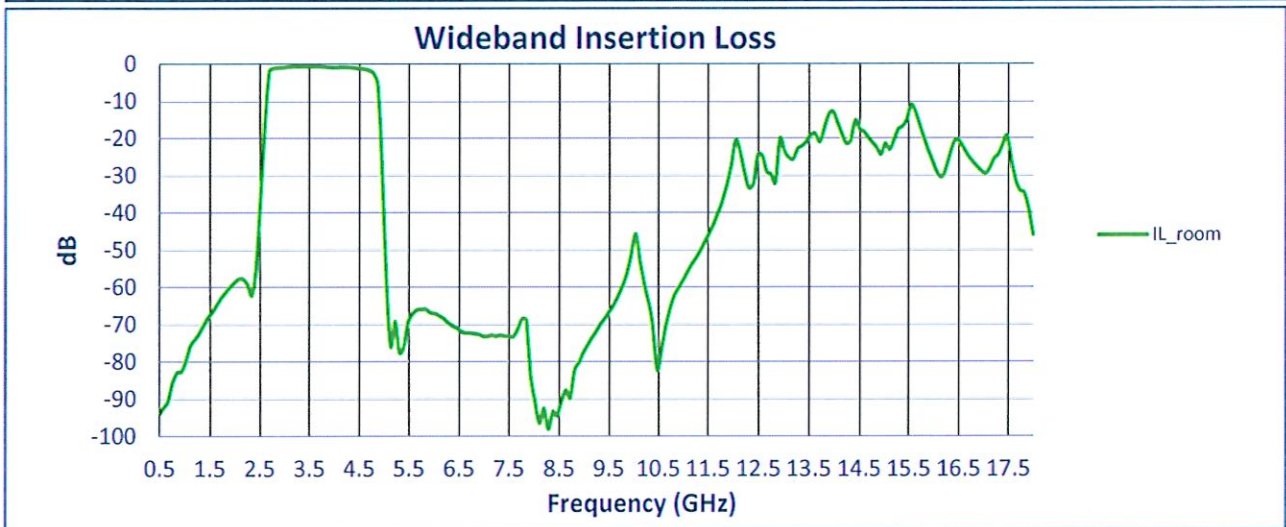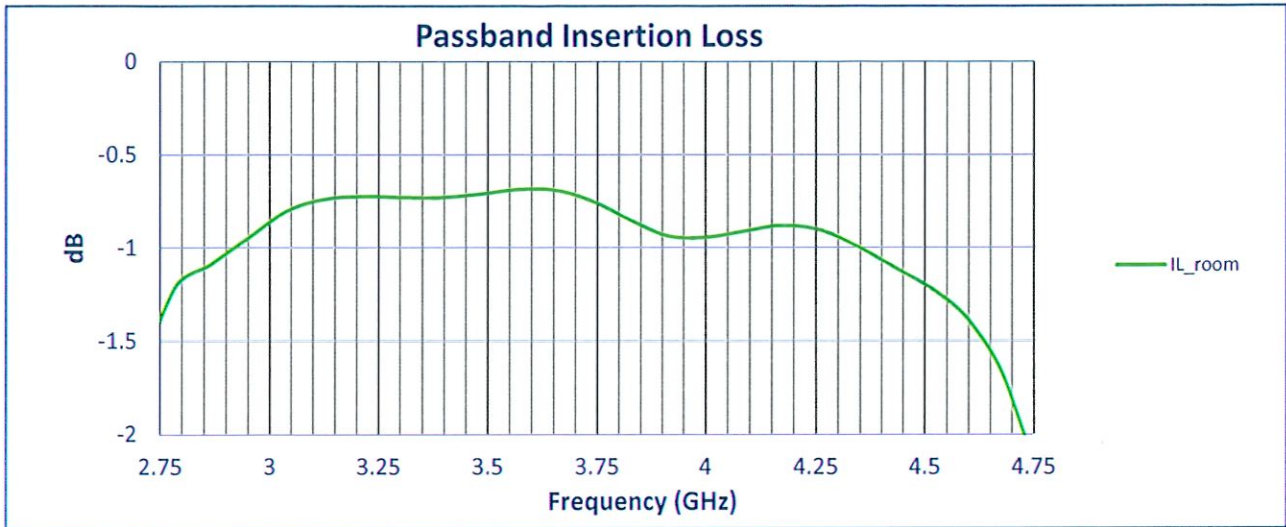

SUMMARY TEST DATA
ON
BPF-2G750M-4G750M-SFF

