

**SUMMARY TEST DATA
ON
P2T-2G18G-60-T-SFF-PM-I-NG**




Customer: _____
 SO No: _____
 Model No: P2T-2G18G-60-T-SFF-PM-I-NG
 Serial No: PL47131/2428

Tested By: S. O'Neill
 Temperature: +25°C
 Date: 11/1/2024
 Drawing No: 27638420 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 GHz to 18.0 GHz	2.0 GHz to 18.0 GHz	PMI QA2
2	Impedance:	50 Ω	50 Ω See Typical Characteristics	
3	Input Power:	+30 dBm Max. (Survival) +20 dBm Max. (Operating)	See Typical Characteristics	
4	VSWR:	2.0: 1Max.	In 1.65:1 Out 1.83 :1 See Plot	
5	Insertion Loss:	3.0 dB Max.	2.97 dB See Plot	
6	Phase Matching:	5° Max.	2.6° See Plot	
7	Isolation:	60 dB Min.	73 dB See Plot	
8	Switching Speed:	100 ns Max.	< 30 ns See Typical Characteristics	
9	DC Voltage:	+5 VDC @ 100 mA Max. -16.2 VDC @ 100 mA Max.	+5 VDC @ 86 mA -16.2 VDC @ 97 mA	

QA/QC Approval:  PMI QA2

Date: 11/5/2024

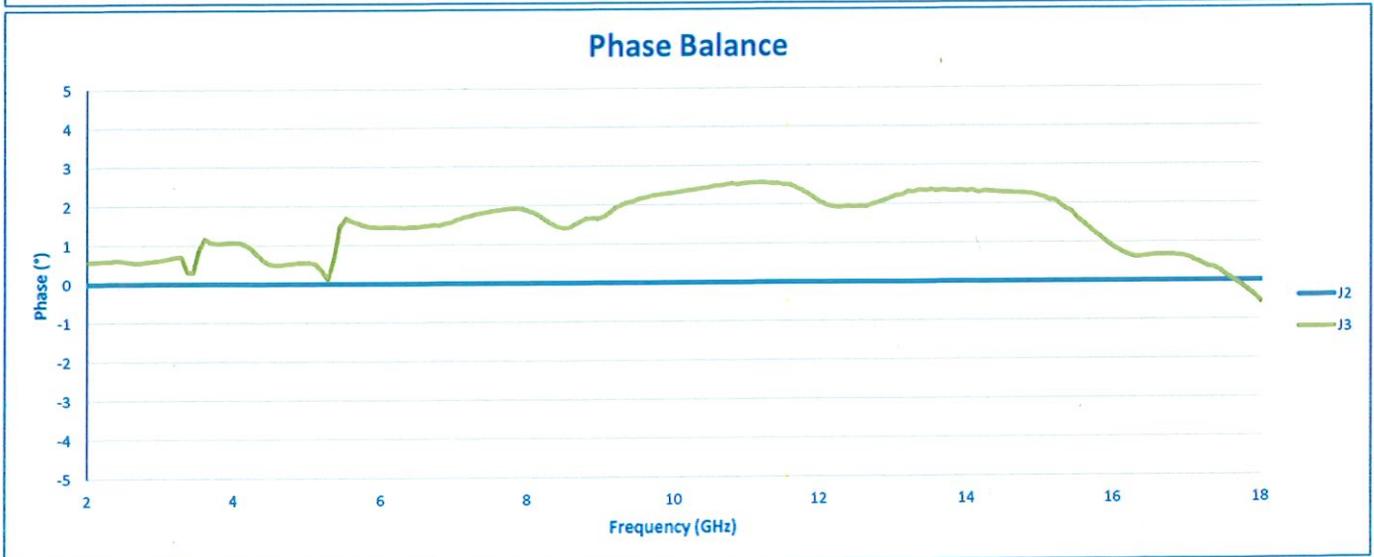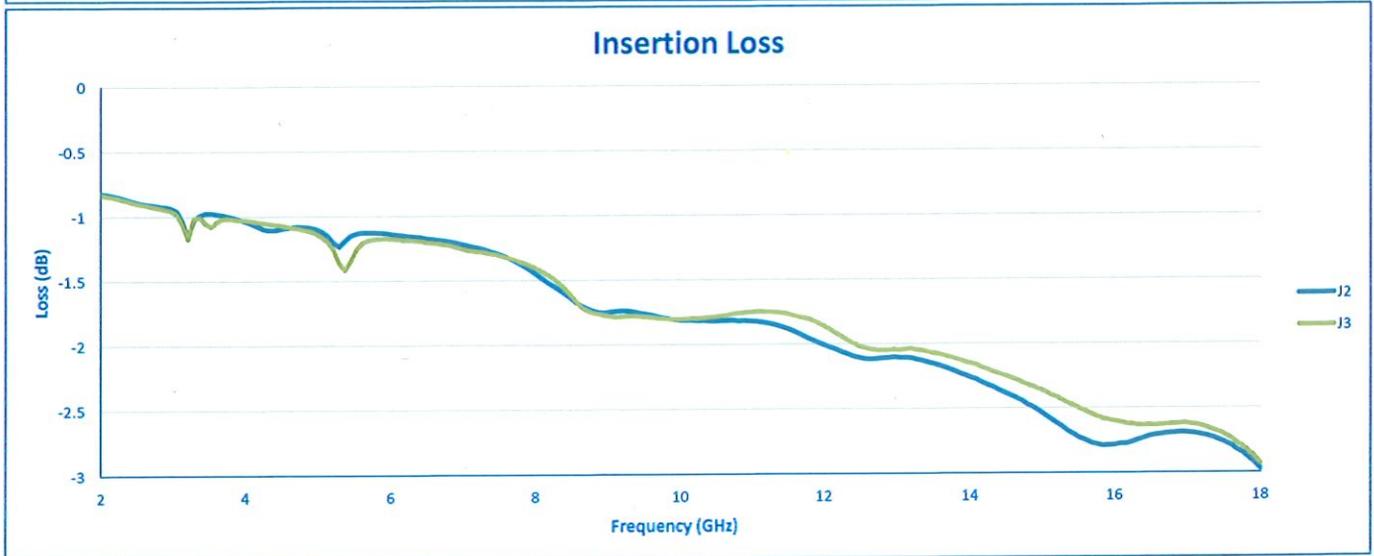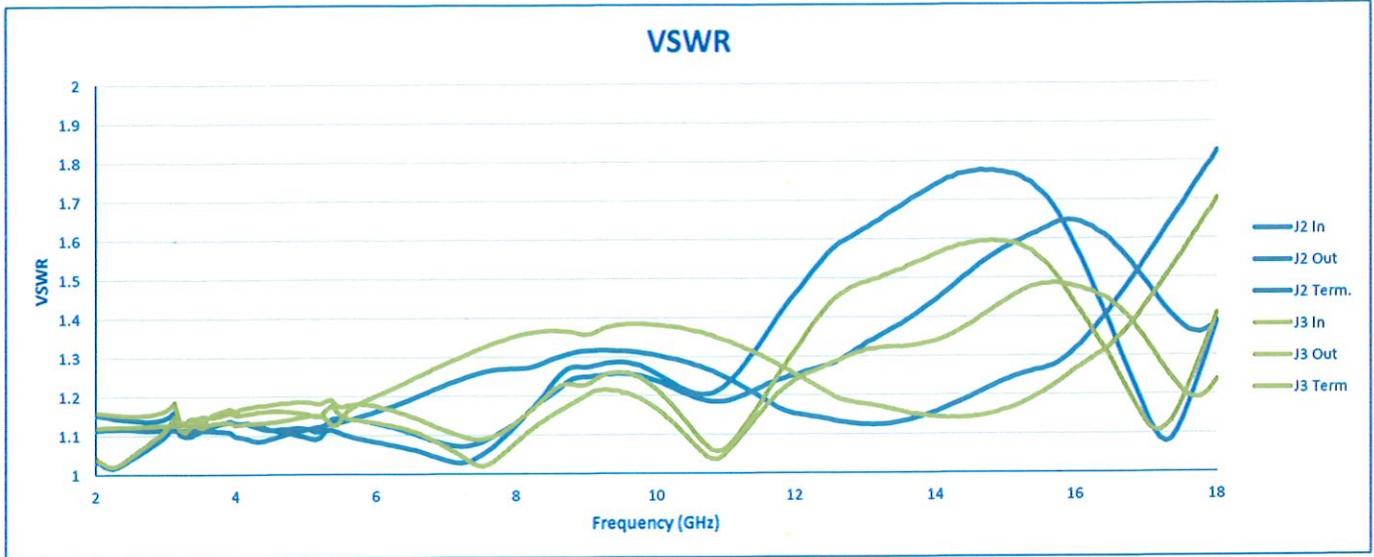

SUMMARY TEST DATA
ON
P2T-2G18G-60-T-SFF-PM-I-NG

