



SUMMARY TEST DATA
ON
EQL-26D5G40G-1D5DB-292MF

Customer: _____
SO No: _____
Model No: EQL-26D5G40G-1D5DB-292MF
Serial Pair: PL47134/2428

Tested By: S. O'Neill
Temperature: +25°C
Date: 7/12/2024
Drawing No: 27632341 REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	FREQUENCY:	26.5 TO 40.0 GHz	26.5 GHz TO 40 GHz	PMI QA4
2	MAXIMUM INPUT POWER:	0.5 WATTS CW	Pass (See Typical Characteristics)	
3	VSWR:	2.0 : 1 MAX	1.76 : 1 INPUT 1.82 : 1 OUTPUT (See Graphs)	
4	INSERTION LOSS @26.5GHz:	1.5 dB MAX	1.24 dB	
5	SLOPE:	0.41 ±0.06 dB/GHz	0.41 dB/GHz (See Graph)	
6	AMPLITUDE ACCURACY:	±0.5 dB (COMPARED TO BEST FIT STRAIGHT LINE)	0.43 dB (See Graph)	PMI QA4

QA/QC Approval: _____

Camron Kelen


Date: 7/15/24




SUMMARY TEST DATA
ON
EQL-26D5G40G-1D5DB-292MF

PL47134/2428

Frequency Vs Insertion Loss

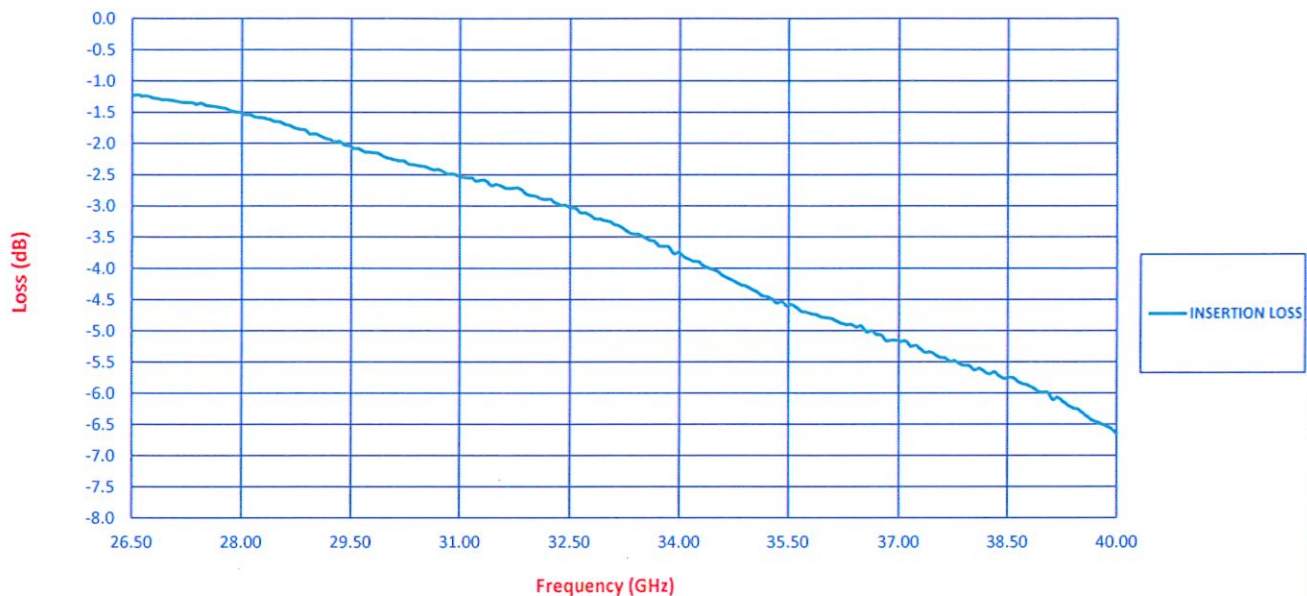

Amplitude Accuracy Vs Frequency

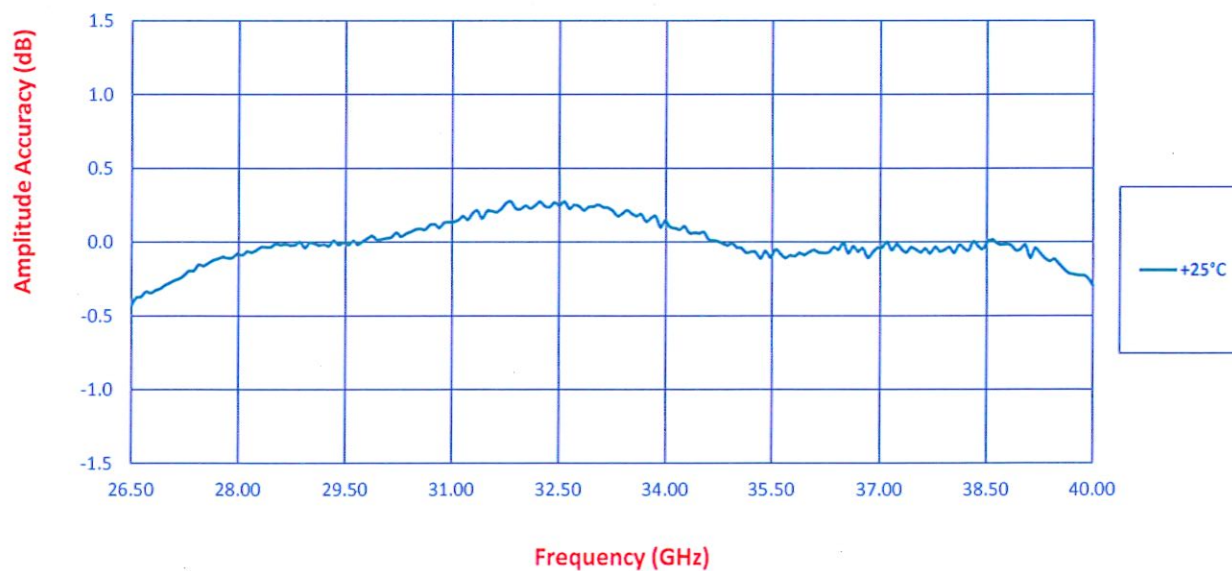




SUMMARY TEST DATA ON EQL-26D5G40G-1D5DB-292MF

PL47134/2428

Return Loss Input Vs Frequency

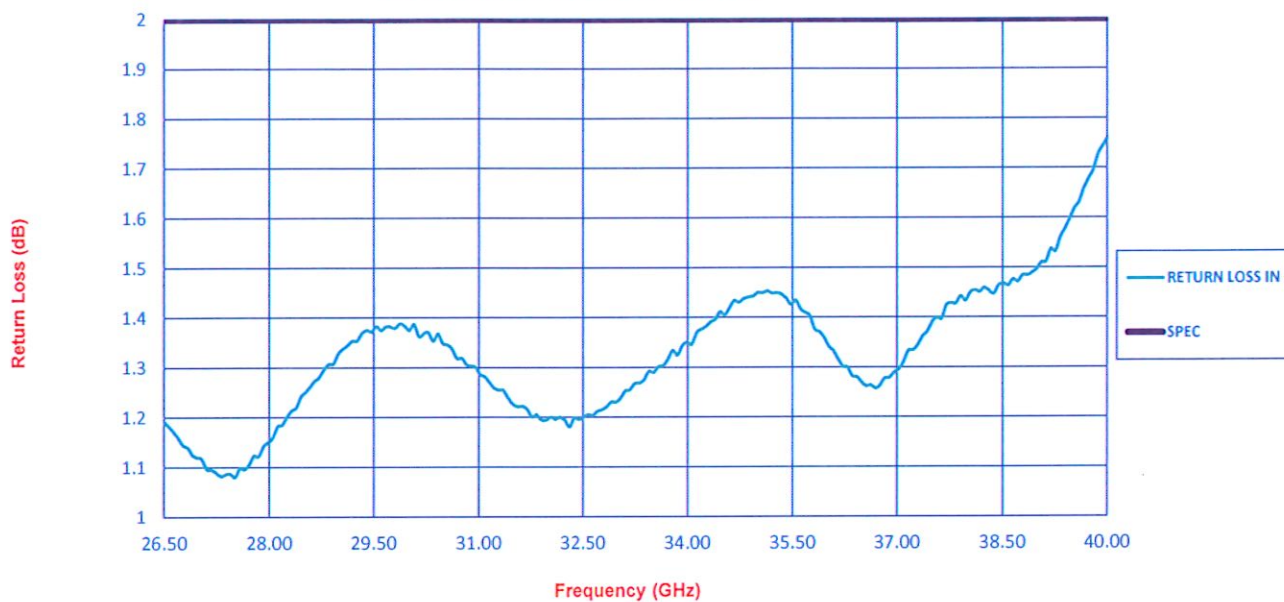

Return Loss Output Vs Frequency

