

SUMMARY TEST DATA

ON

11DP-11R5/16R5-CD-SFF

CUSTOMER: _____
SO: _____
MODEL NO: 11DP-11R5/16R5-CD-SFF
SERIAL NO: PL47538/2432

TESTED BY: K Craven
TEMPERATURE: +25
DATE: 8/8/2024
DRAWING NO: 27608608 Rev: A2




TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	REMARKS QA/QC
1	Center Frequency	BPF1 - 11.5 GHz BPF2 - 16.5 GHz	BPF1 - 11.5 GHz BPF2 - 16.5 GHz	PMI QA2
2	Passband Frequency Range	BPF1 - 10.75 to 12.25 GHz BPF2 - 15.75 to 17.25 GHz	BPF1 - 10.75 to 12.25 GHz BPF2 - 15.75 to 17.25 GHz	
3	Insertion Loss @ Passband	2 dB Goal 3 dB Max	0.91 dB	
4	VSWR	1.5:1 Max.	1.32:1	
5	Rejection	BPF1 - -50 dBc Min @ 10.25 GHz -75 dBc Min @ 13.75 GHz BPF2 - -50 dBc Min @ 17.25 GHz -75 dBc Min @ 14.75 GHz	BPF1- -51.48 dBc -107.12 dBc BPF2- -51.39 dBc -100.01 dBc	
6	Return Loss Input/ Output	-14.0 dB Max.	-16.59 dB	PMI QA2






PMI
QA2

8/37/2024




**SUMMARY TEST DATA
ON
11DP-11R5/16R5-CD-SFF**

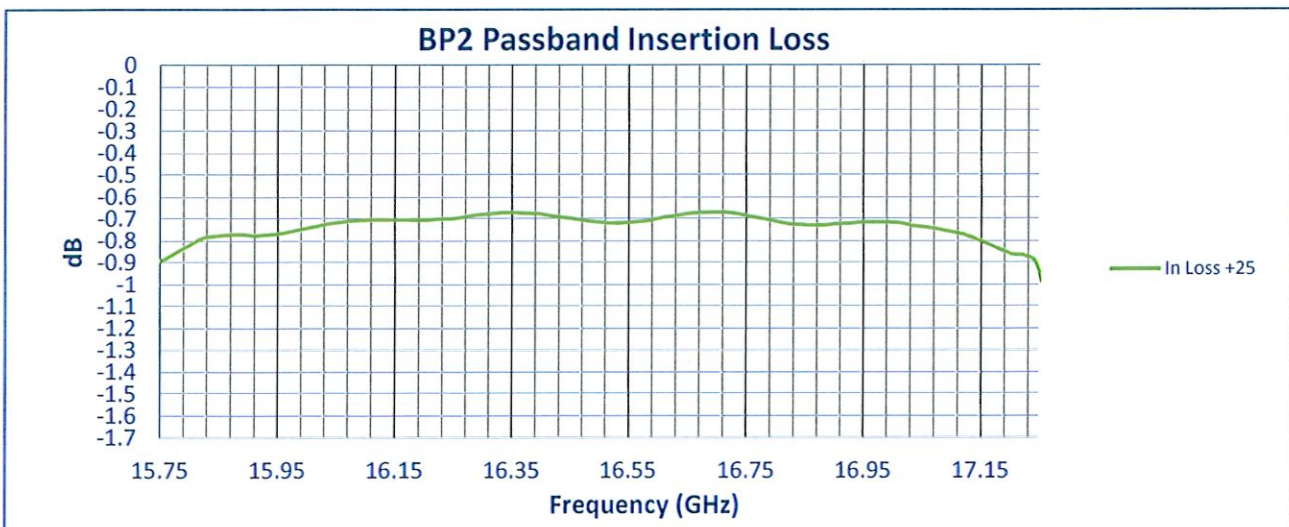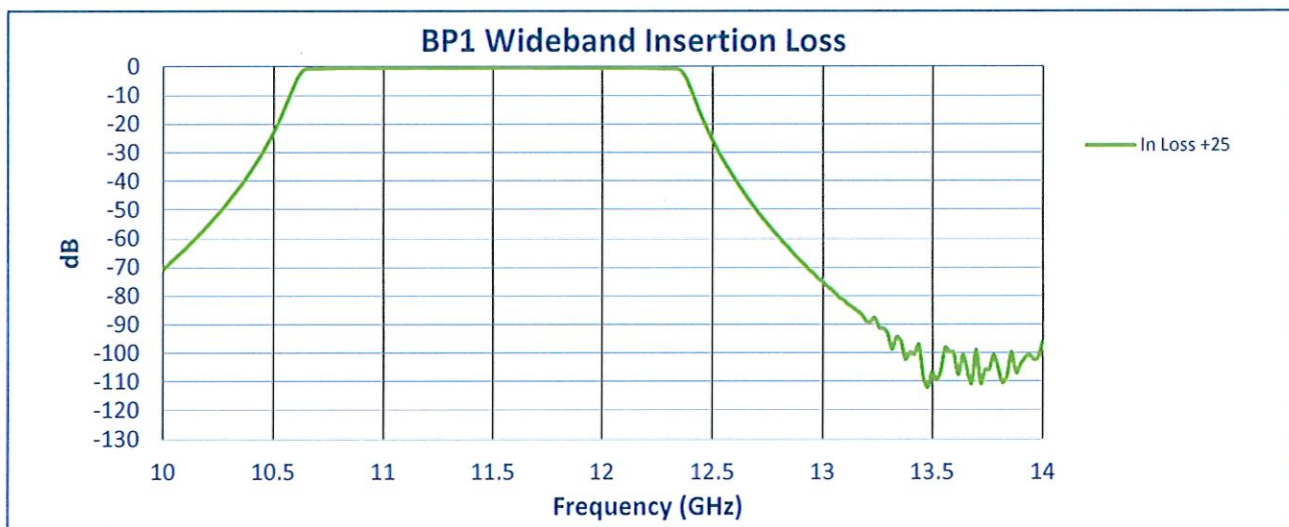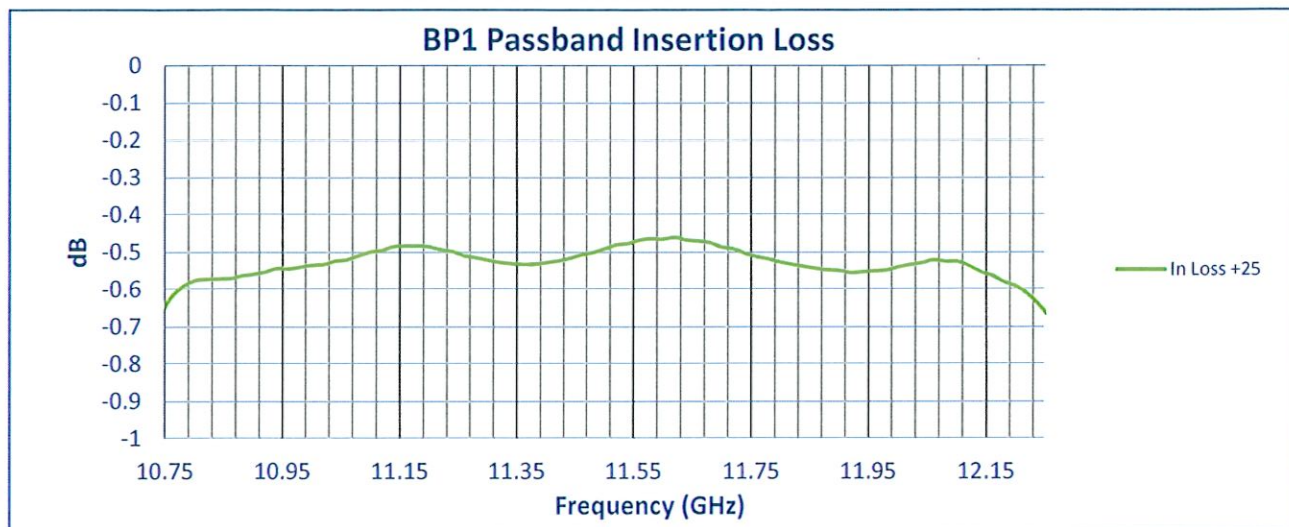

**SUMMARY TEST DATA
ON
11DP-11R5/16R5-CD-SFF**

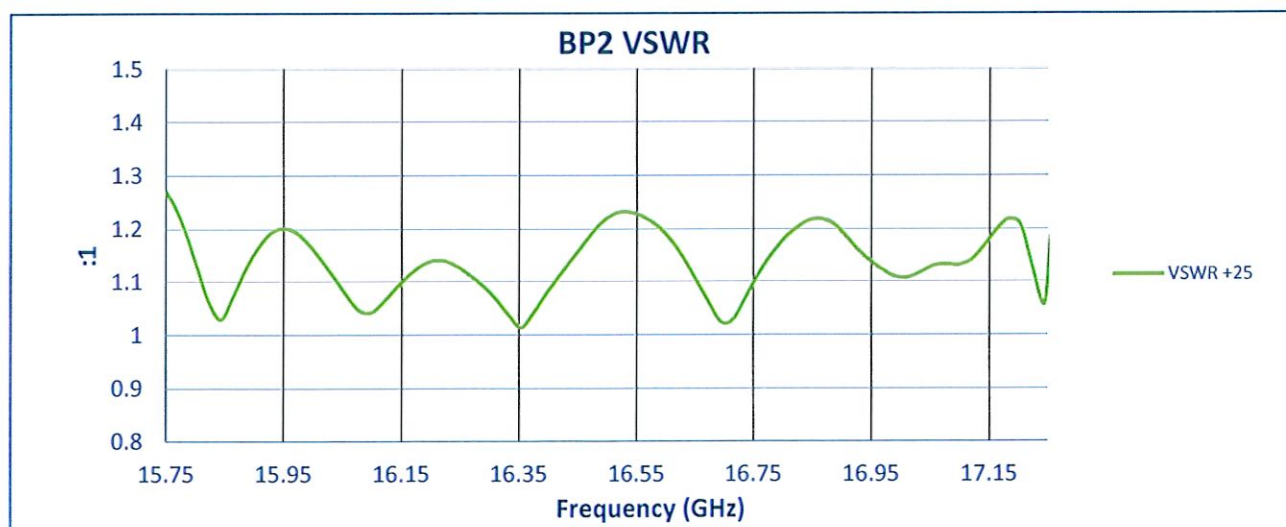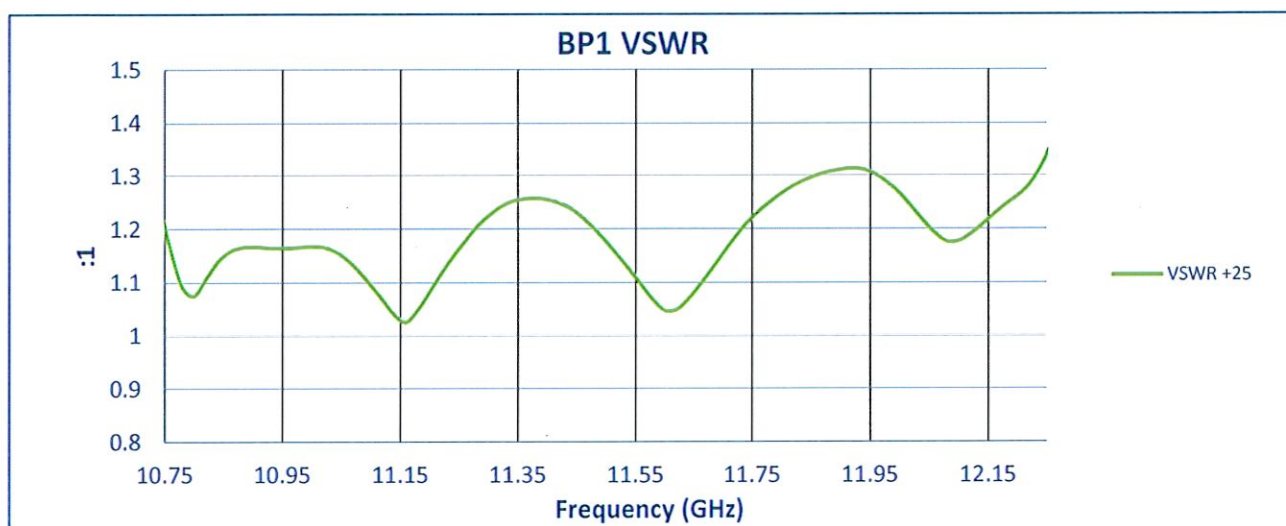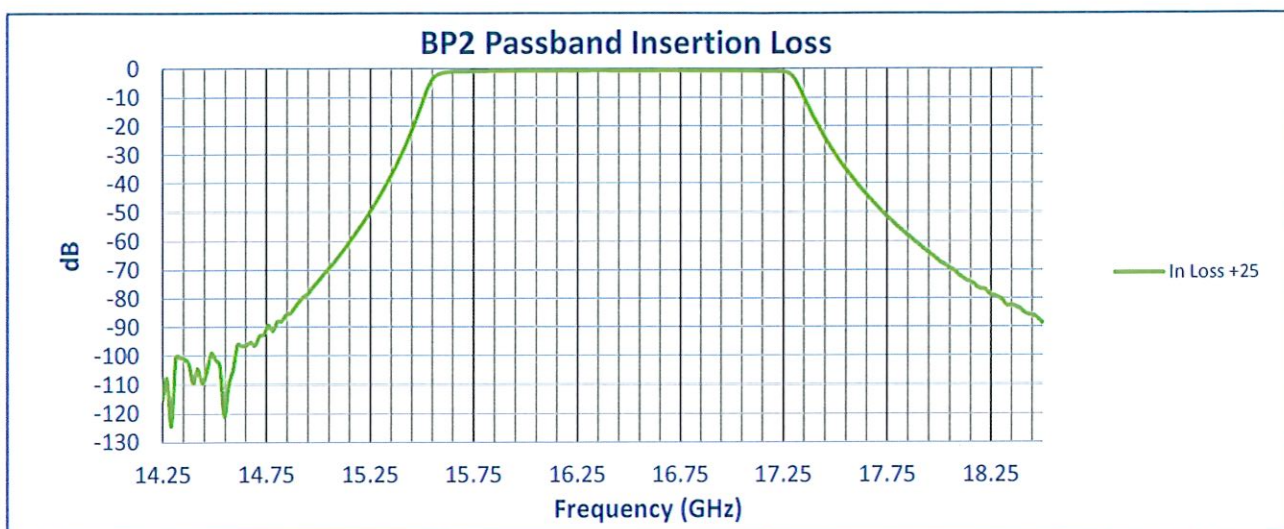

**SUMMARY TEST DATA
ON
11DP-11R5/16R5-CD-SFF**

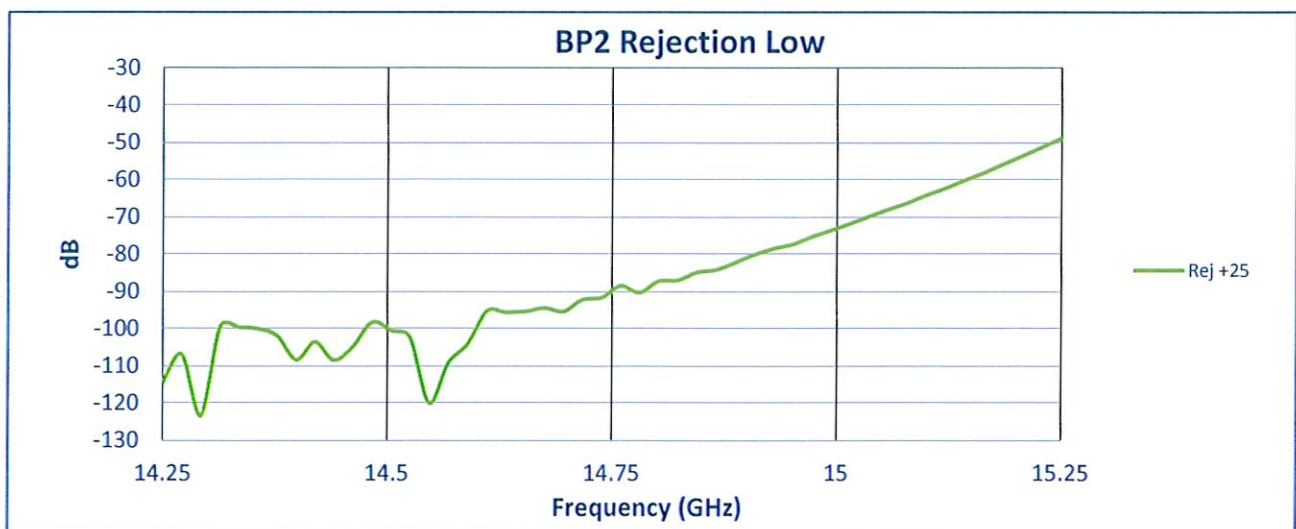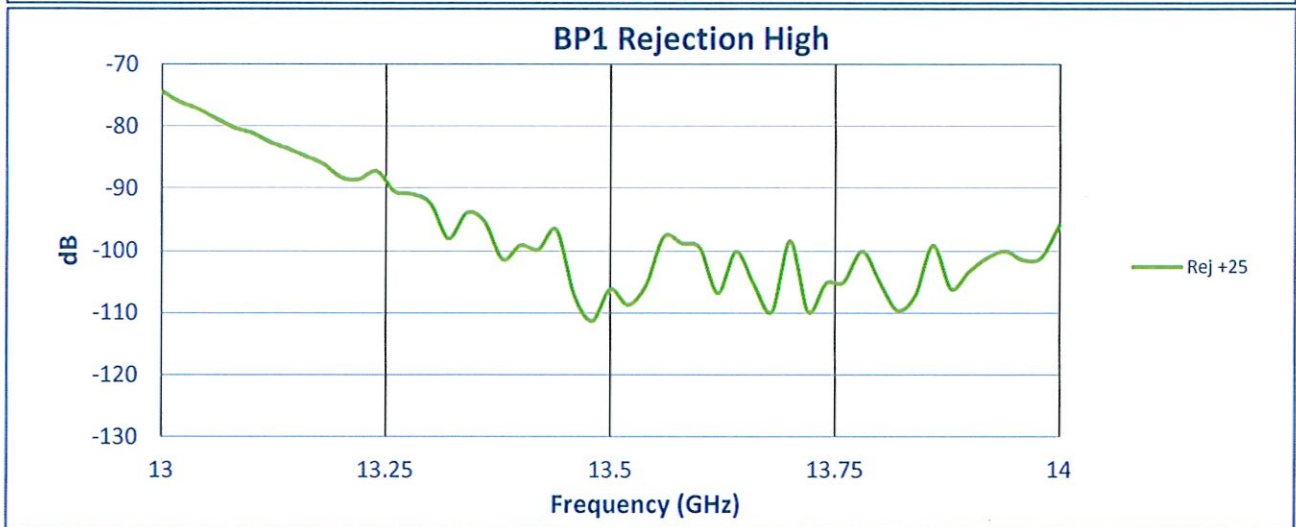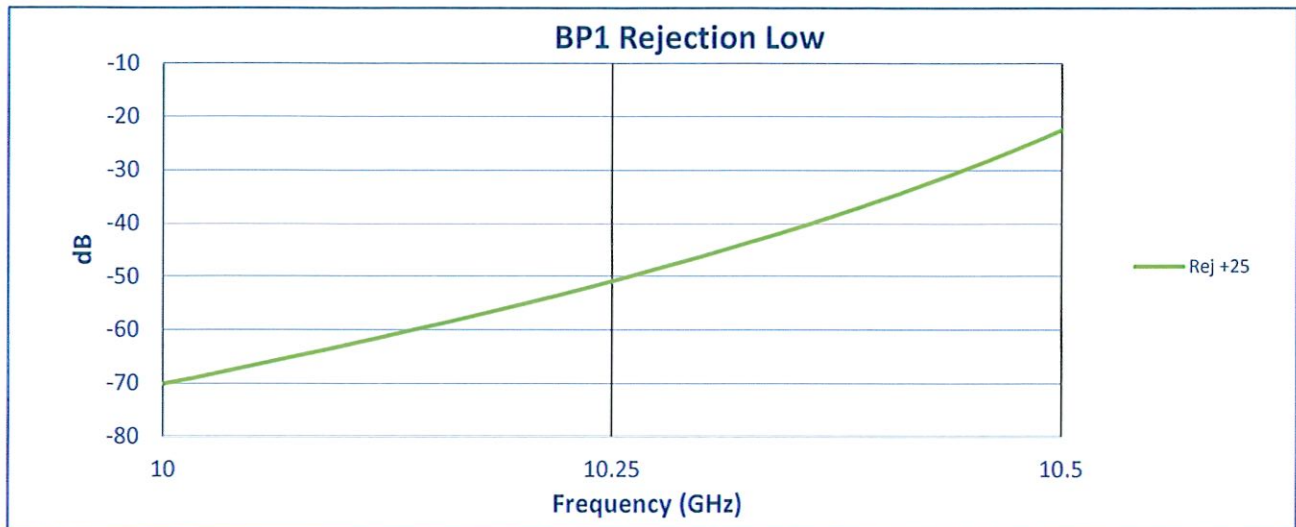

**SUMMARY TEST DATA
ON
11DP-11R5/16R5-CD-SFF**

