




Carrier Signal

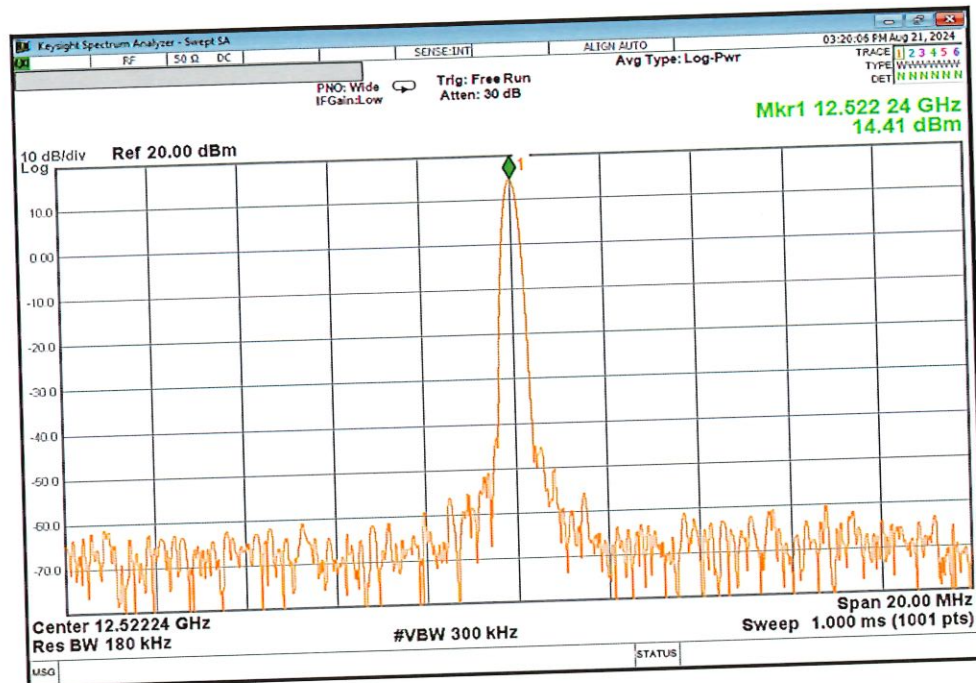

Harmonics

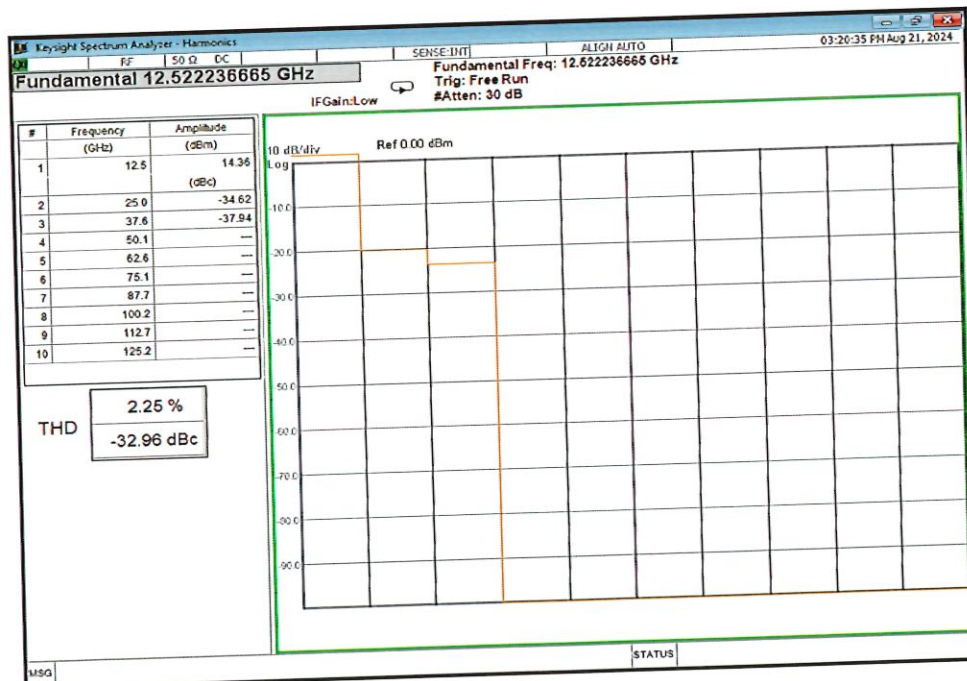

Spurious

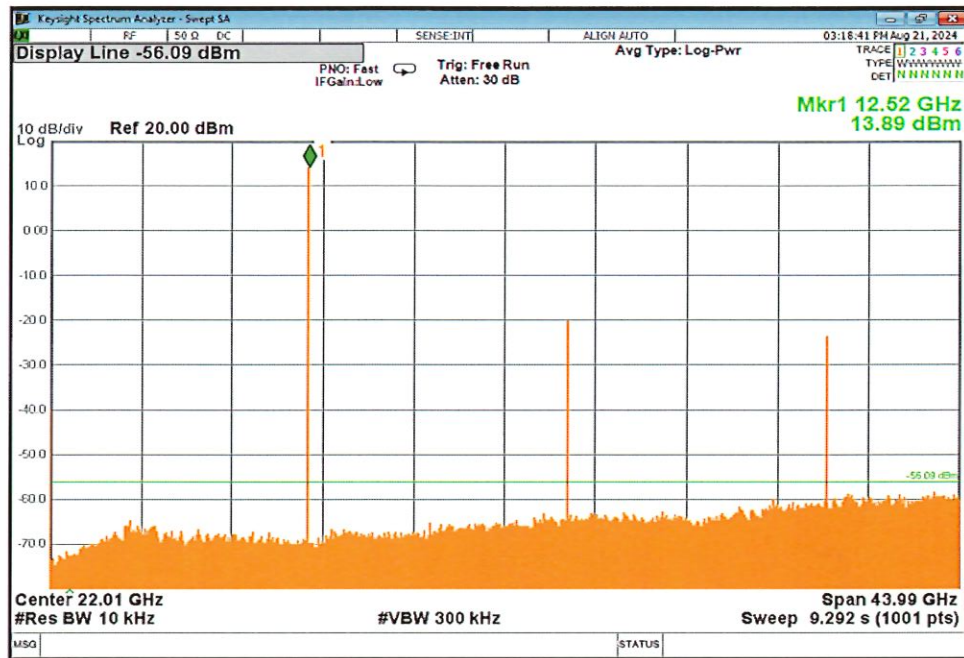

Phase Noise Curve

R&S FSUP 50 Signal Source Analyzer			LOCKED
Settings	Residual Noise [T1 w/o spurs]	Phase Detector +20 dB	
Signal Frequency: 12.522240 GHz	Int PHN (30.0 .. 30.0 M) -59.6 dBc		
Signal Level: 6.62 dBm	Residual PM 85.208 m°		
Cross Corr Mode Harmonic 1	Residual FM 1.815 kHz		
Internal Ref Tuned Internal Phase Det	RMS Jitter 0.0189 ps		

