



**SUMMARY TEST DATA**  
**ON**  
**P8T-20M6G-80-R-515-SFF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P8T-20M6G-80-R-515-SFF  
 Serial No: PL47936/2435




Tested By: S. O'Neill  
 Temperature: 25°C  
 Date: 8/28/2024  
 Drawing No: 27625043 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.02 GHz to 6 GHz	0.02 GHz to 6 GHz	PMI QA4
2	Insertion Loss	3.25 dB Max. 2.75 dB Typ.	2.01 dB	
3	Isolation	80 dB Min. 100 dB Typ.	83.9 dB	
4	VSWR: In/Out	2:1 Max.	1.33:1 In 1.35:1 Out	
5	Switching Speed Max	250 ns Max.	Pass See Typical Characteristics	
6	Operating Power CW	23 dBm Max	Pass See Typical Characteristics	
7	Control Signal	3-Bit Decoded TTL Logic	Pass	
8	Power Supply	5 V @ 350 mA Max. -15 V @ 100 mA Max.	5 V @ 184 mA -15 V @ 30 mA	PMI QA4

QA/QC Approval: *Camrony Kelly*

Date: 8/28/24

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
 Email: sales@quanticpmi.com

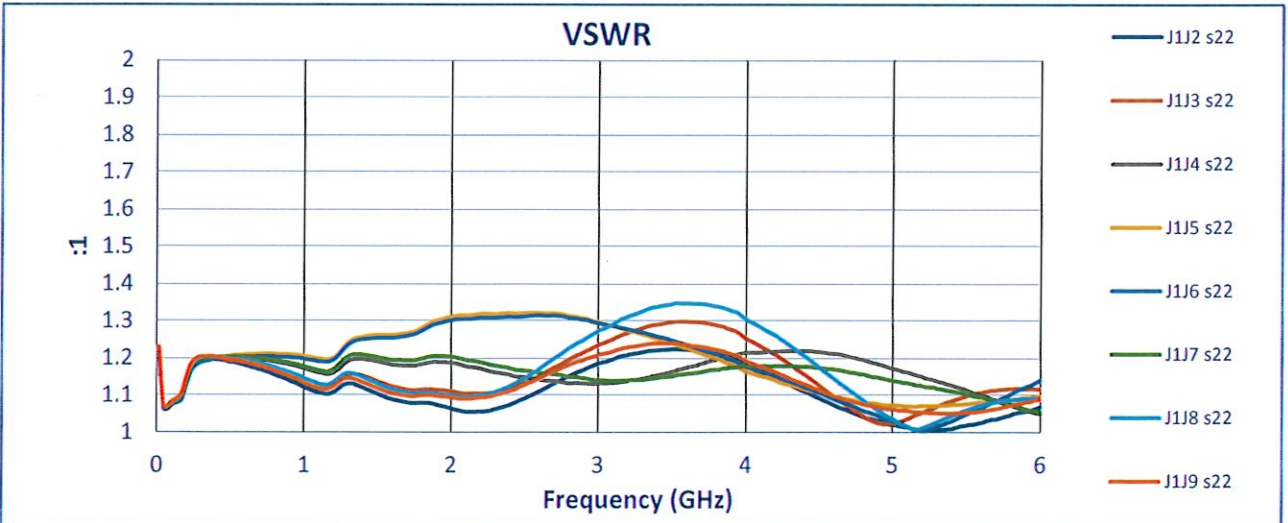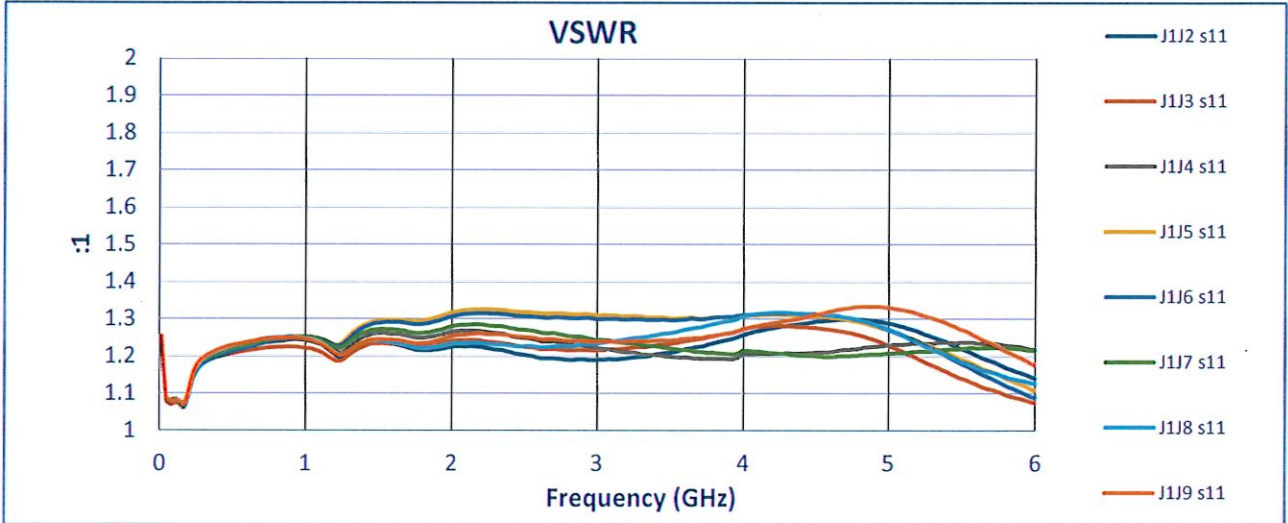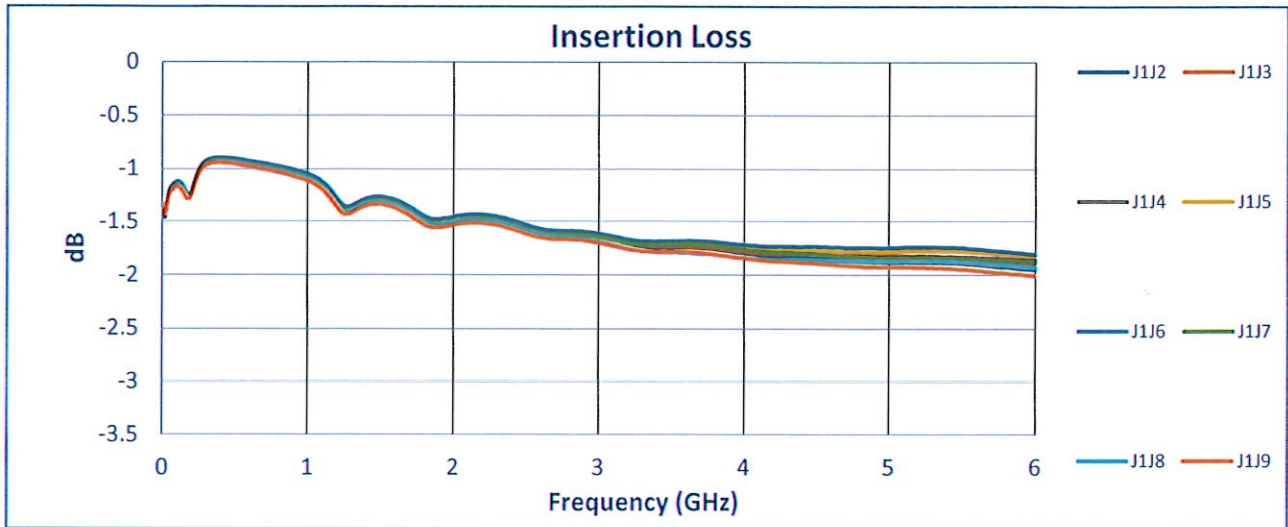

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@quanticpmi.com

