

**SUMMARY TEST DATA
ON
P3T-8G12G-70-R-SFF**

Customer: _____
 SO No: _____
 Model No: P3T-8G12G-70-R-SFF
 Serial No: PL50357/2448


Tested By: K. Wagaman
 Temperature: +25 C
 Date: 11/25/2024
 Drawing No: 27627301 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	8.0 TO 12.0 GHz	8.0 TO 12.0 GHz	PMI QA4
2	Insertion Loss	2.4 dB Typ	2.3 dB See Plot	
3	VSWR	1.8:1 Typ	1.48:1 See Plot	
4	Isolation	70 dB Min	81.76 dB See Plot	
5	Switching Speed	100 ns Max	See Typical Characteristics	
6	Input Power	+30dBm Max (Survival) +20dBm Max (Operating)	Pass	
7	DC Supply	+5VDC @ 150 mA Typ -15VDC @ 75mA Typ	+5VDC @ 90 mA -15VDC @ 26 mA	
8	Control Signal	LOGIC TABLE E1 E2 E3 FUNCTION 0 1 1 J1-J2 "LOW LOSS" 1 0 1 J1-J3 "LOW LOSS" 1 1 0 J1-J4 "LOW LOSS"	Pass	PMI QA4

QA/QC Approval: *Camryn Kleg*

Date: 11/26/24

**SUMMARY TEST DATA
ON
P3T-8G12G-70-R-SFF™**

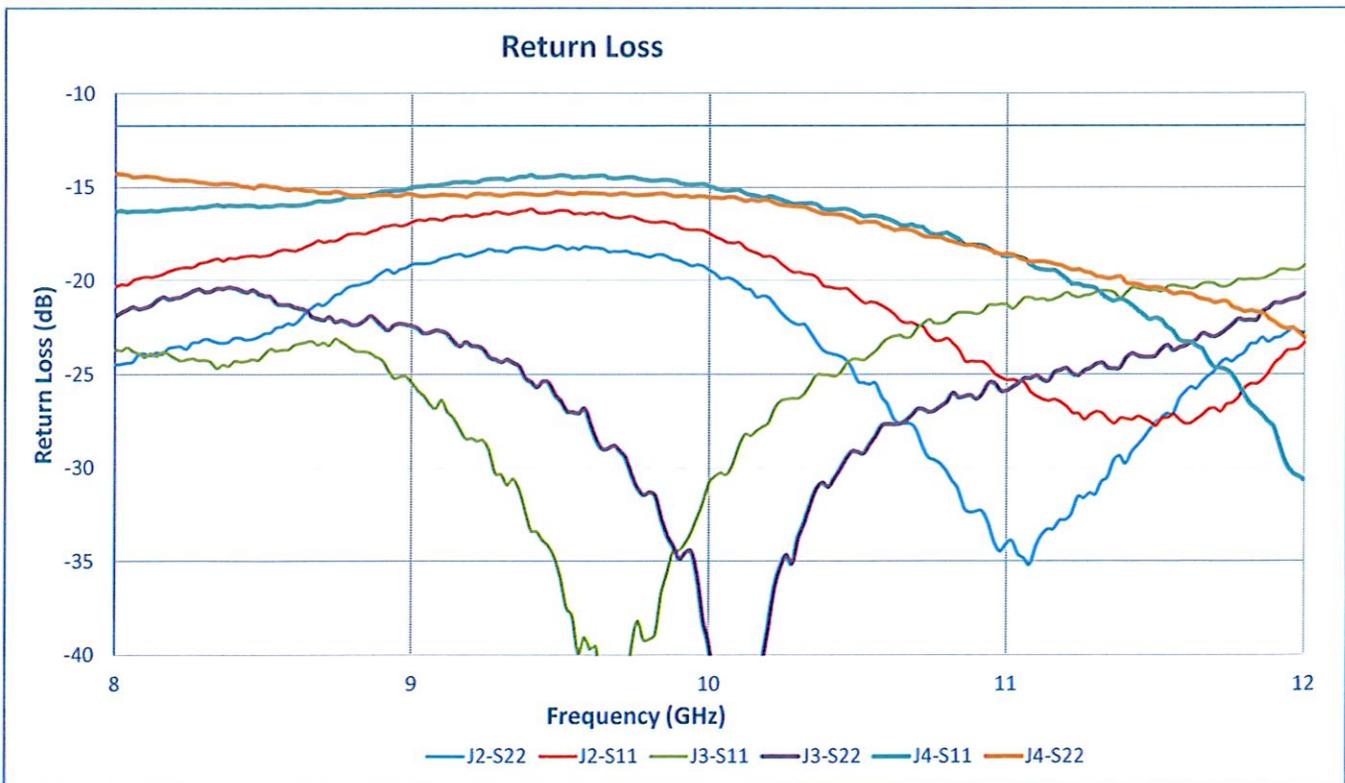

SUMMARY TEST DATA
ON
P3T-8G12G-70-R-SFF

