



SUMMARY TEST DATA
ON
LM-20M15G-100W-15DBM

Customer: _____
SO No: _____
Model No: LM-20M15G-100W-15DBM
Serial No: PL50737/2450

Tested By: John R.
Temperature: +25°C
Date: 12/13/2024
Drawing No: 27638620

REV: A2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	20 MHz to 15 GHz	20 MHz to 15 GHz	PMI QA4
2	Insertion Loss:	1.8 dB Max @ -10dBm Input Power	1.58 dB See Graph	
3	Input/Output VSWR:	2.0:1 Max. @ -10 dBm Input Power	1.96:1 In 1.81:1 Out See Graph	
4	RF Power Handling:	100W CW Max. @ -55C TO +85C 1kW Peak (1µs Max. PW, 0.1% Duty Cycle) 100W (1µs, 1% Duty Cycle, 10KHz) 100W (10µs, 0.1% Duty Cycle, 100Hz) 100W (1µs, 0.1% Duty Cycle, 1KHz) 100W (40µs, 10% Duty Cycle, 2.5KHz)	Pass See Typical Characteristics	
5	Leakage Power:	+15 dBm Max. Max. @100W CW	Pass See Typical Characteristics	
6	P1dB:	+5 dBm Min.	+ 6 dBm See Graph	
7	Recovery Time:	100 ns Max.	Pass See Typical Characteristics	PMI QA4

QA/QC Approval:

Cameron Velez


Date:

12/17/24


SUMMARY TEST DATA ON LM-20M15G-100W-15DBM

PL50737/2450

Insertion Loss

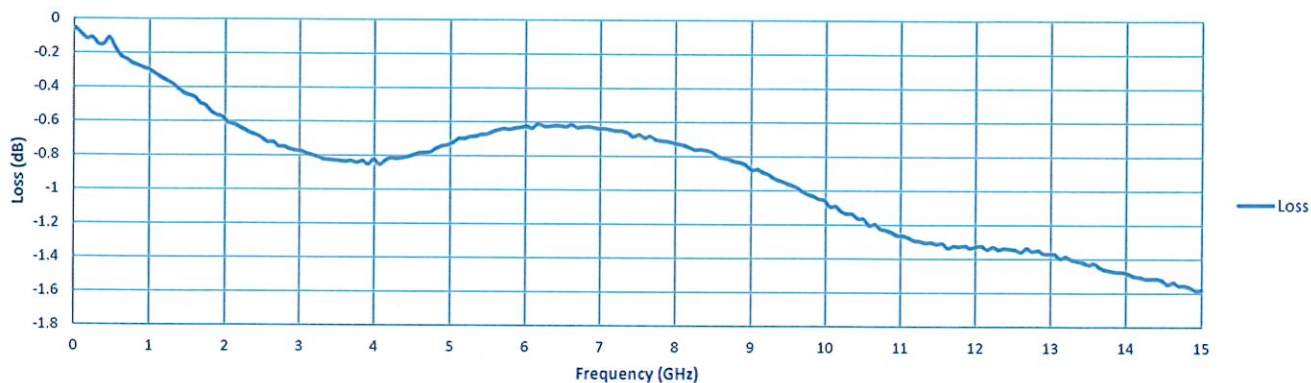

VSWR

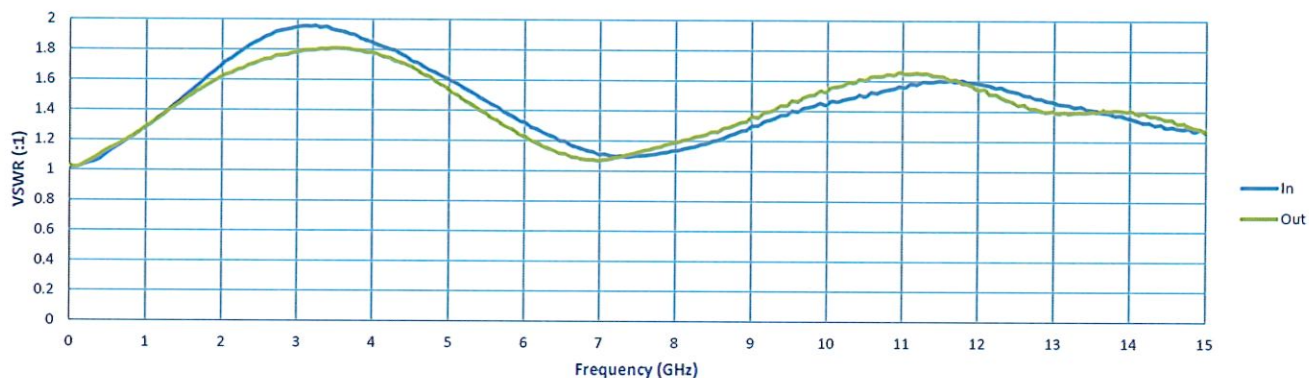

Limiter Response with Frequency

