




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	2 to 4 GHz	Pass	PMI QA2
2	LO Power	+13 dBm Min +15 dBm Typ +16 dBm Max	Pass	
3	LO VSWR	1.5:1 Typ	Pass	
4	RF VSWR	2.5:1 Typ	Pass	
5	Conversion Loss	9.5 dB Typ 12.5 dB Max	Pass (See Plot)	
6	Noise Figure	10 dB Typ	Pass	
7	Input IP2	+64 dBm Typ	Pass	
8	Input IP3	+17 dBm Typ	Pass	
9	Input P1dB	+6 dBm Typ	Pass	
10	LO-RF Isolation	55 dB Typ 45 dB Min	Pass (See Plot)	
11	LO-IF Isolation	45 dB Typ	Pass (See Plot)	
12	Image Rejection	35 dB Typ 20 dB Min	Pass (See Plot)	
13	RF/IF Input Power W/O Damage	+25 dBm Max	Pass	PMI QA2

Date: 2/21/2025


7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@quanticpmi.com

**SUMMARY TEST DATA
ON
IRMX-2G4G-55-35-SFF-HIGH**

IMAGE REJECTION

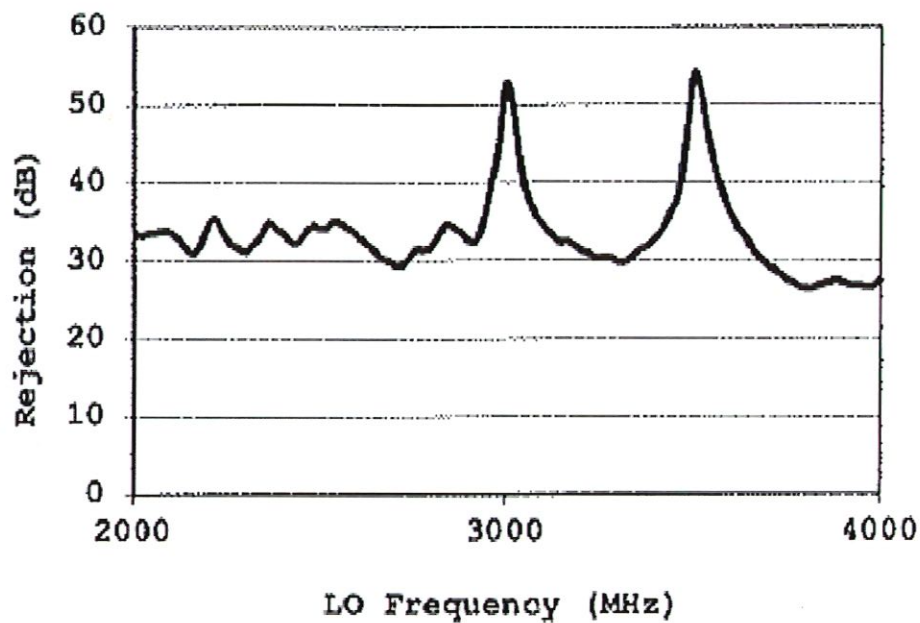


CONVERSION LOSS

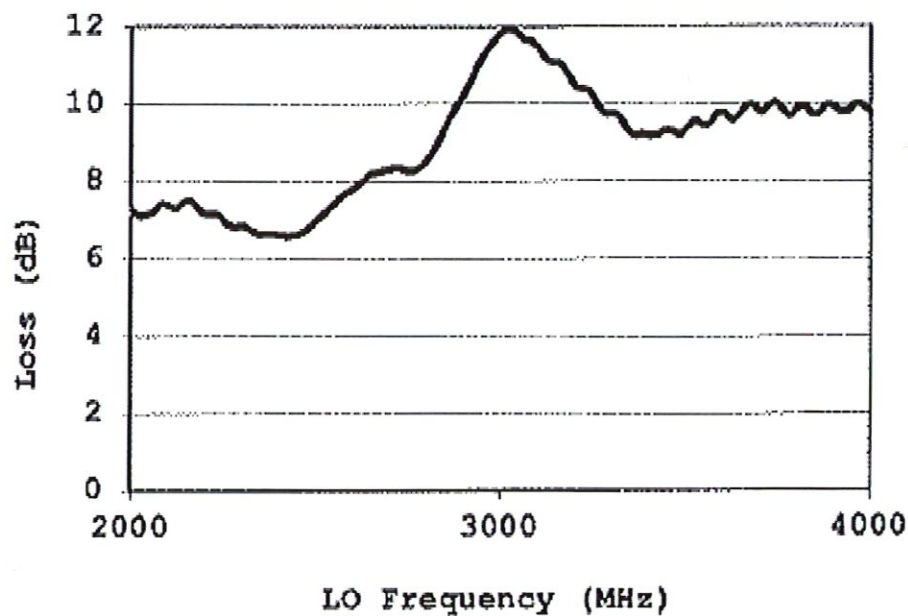

**SUMMARY TEST DATA
ON
IRMX-2G4G-55-35-SFF-HIGH**

LO-RF ISOLATION

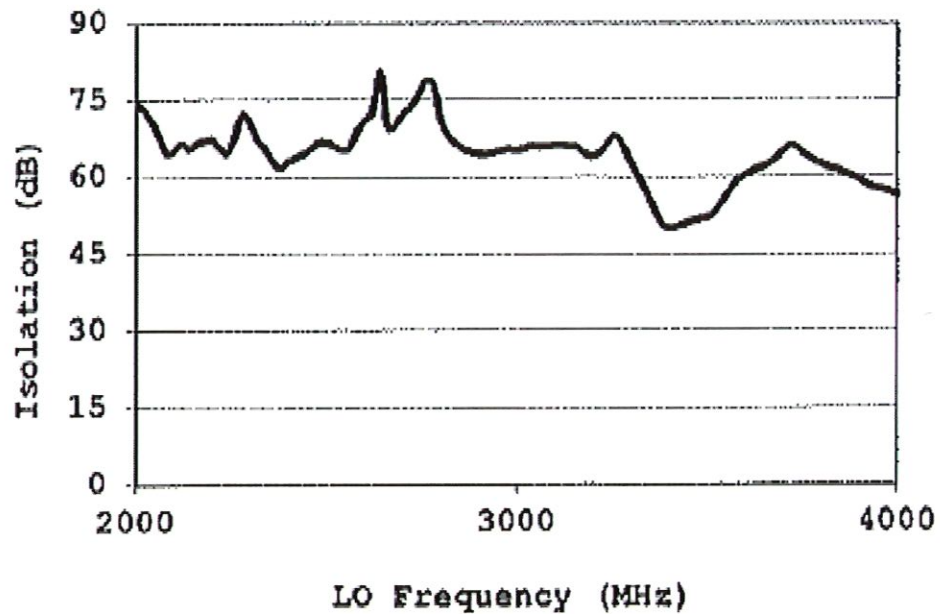

LO-IF Isolation

