




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	4 to 8 GHz	Pass	PMI QA2
2	LO Power	+14 dBm Min +15 dBm Typ +17 dBm Max	Pass	
3	LO VSWR	1.4:1 Typ	Pass	
4	RF VSWR	2.0:1 Typ	Pass	
5	Conversion Loss	7.5 dB Typ 10.5 dB Max	Pass (See Plot)	
6	Noise Figure	8 dB Typ 10.5 dB Max	Pass	
7	Input IP3	+24 dBm Typ	Pass	
8	Input P1dB	+14 dBm Typ	Pass	
9	LO-RF Isolation	55 dB Typ 40 dB Min	Pass (See Plot)	
10	LO-IF Isolation	55 dB Typ	Pass (See Plot)	
11	Image Rejection	35 dB Typ 25 dB Min	Pass (See Plot)	
12	RF/IF Input Power W/O Damage	+23 dBm Max	Pass	PMI QA2

2/21/2025


7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@quanticpmi.com

SUMMARY TEST DATA ON IRMX-4G8G-55-35-SFF-HIGH

IMAGE REJECTION

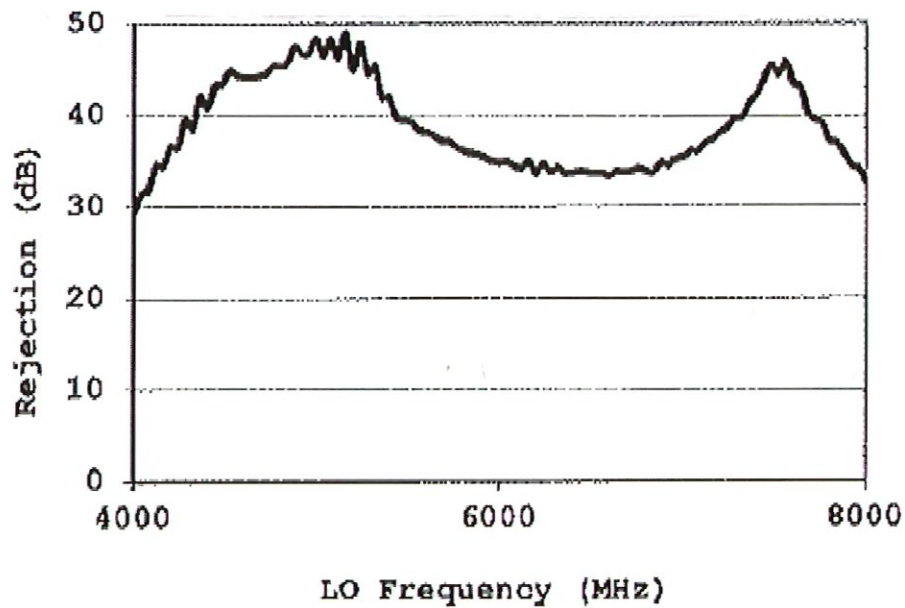


CONVERSION LOSS

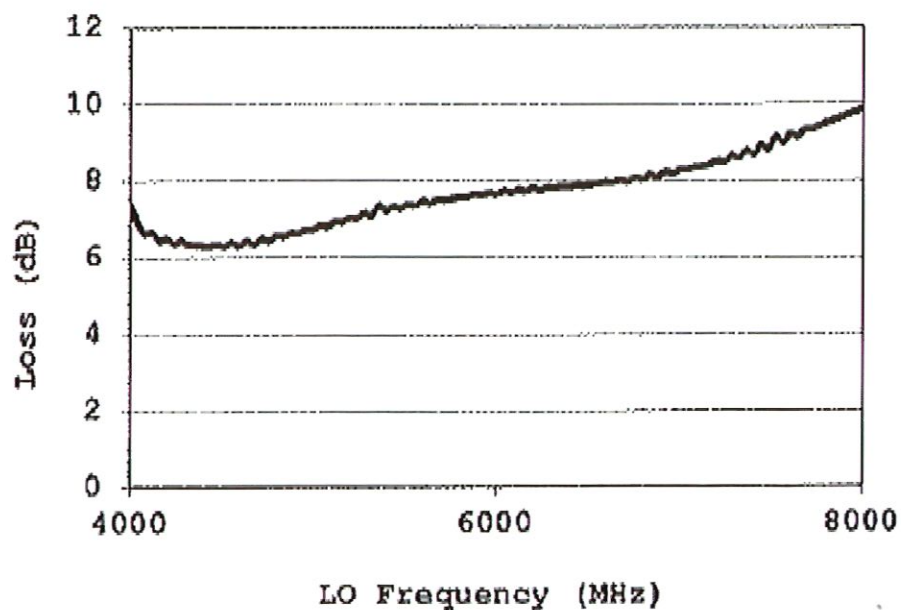

SUMMARY TEST DATA ON IRMX-4G8G-55-35-SFF-HIGH

LO-RF ISOLATION

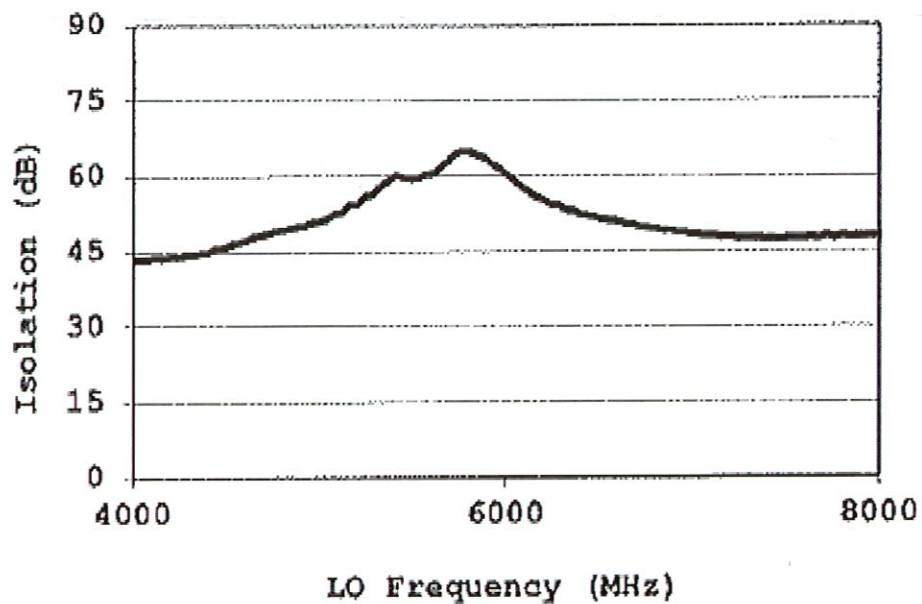

LO-IF Isolation

