

**SUMMARY TEST DATA  
ON  
P8T-0D418-75-T-SFF**




Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P8T-0D418-75-T-SFF  
 Serial No: PL51343/2506

Tested By: HUGO G.  
 Temperature: 25°C  
 Date: 1/21/2025  
 Drawing No: 27646780 Rev: B1



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.4 GHz to 18 GHz	0.4 GHz to 18 GHz	PMI QA2
2	Isolation	75 dB Min.	77.6 dB	
3	Insertion Loss	3.4 dB Max., 0.4-10 GHz 5.0 dB Max., 10-18 GHz	3.13 dB 4.23 dB	
4	Return Loss On/Off	-10 dB Min.	-10.83 dB J0 -11.37 dB J1-J8 -10.58 dB J1-J8 Off	
5	Power Supply	5 V @ 250 mA Max. -15 V @ 100 mA Max.	5 V @ 162 mA -15 V @ 67 mA	PMI QA2

QA/QC Approval:  PMI  
QA2 Date: 2/12/2025

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
 Email: sales@quanticpmi.com

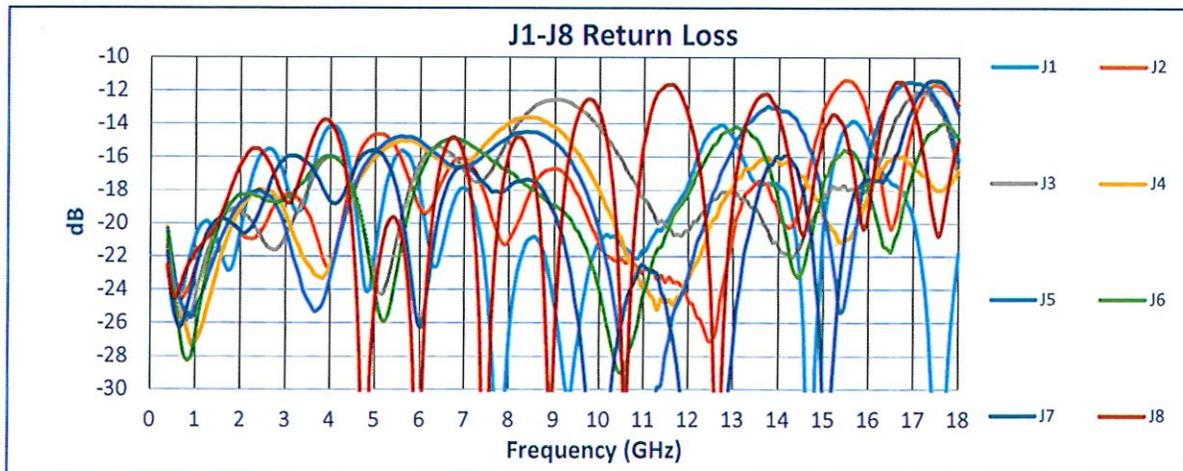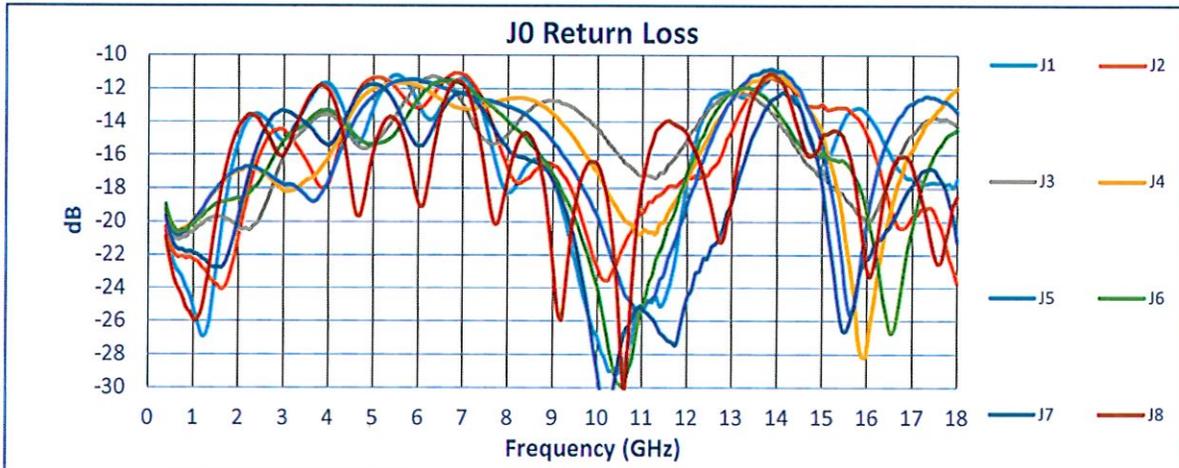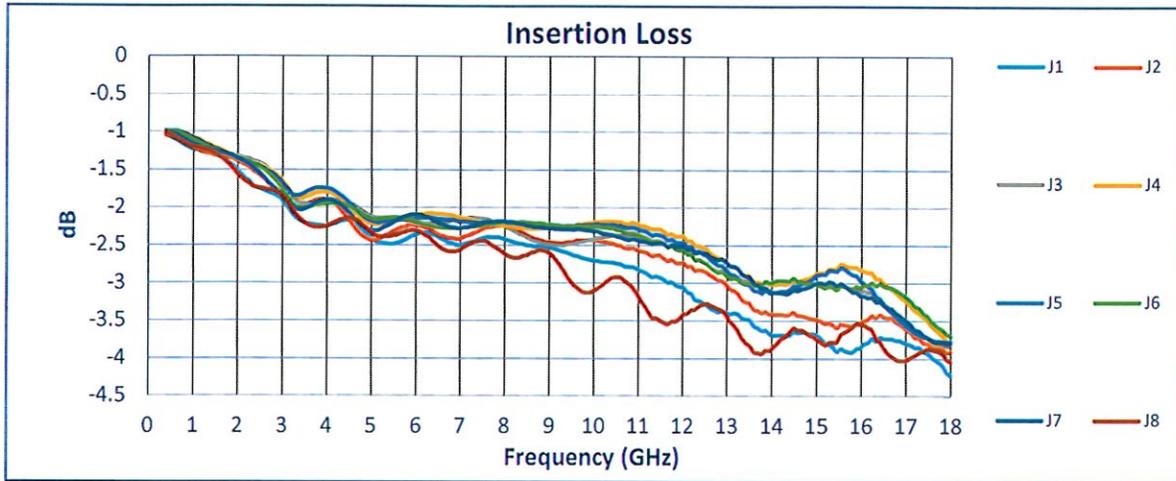

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@quanticpmi.com

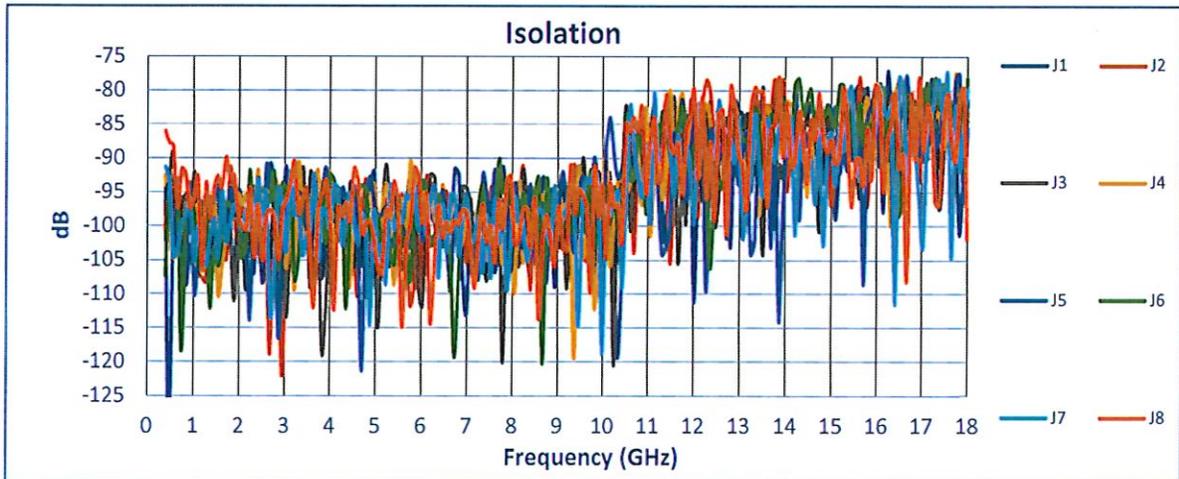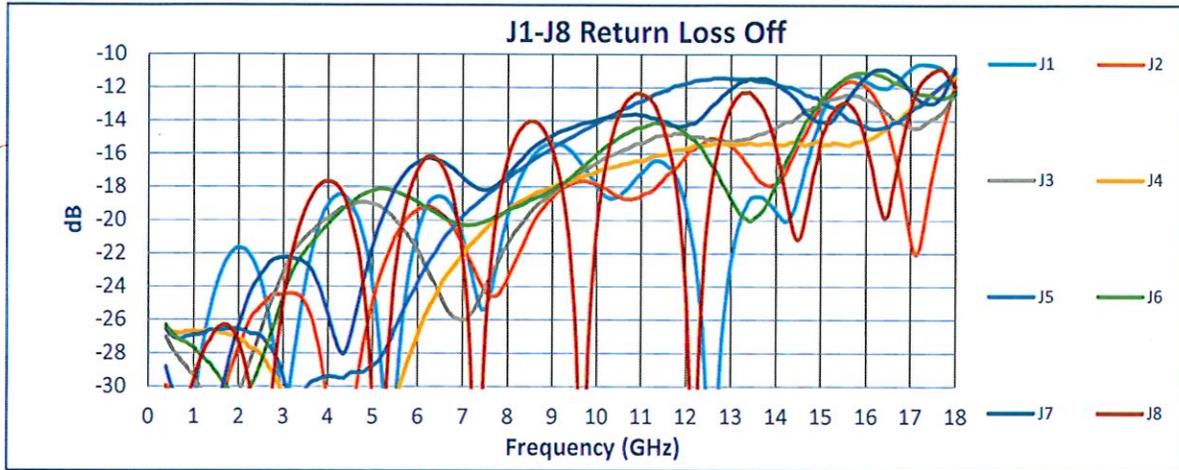

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@quanticpmi.com