

**SUMMARY TEST DATA  
ON  
LM-118-100W-22DBM**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: LM-118-100W-22DBM  
 Serial PL51587/2509



Tested By: Alfredo Lopez  
 Temperature: 25°C  
 Date: 2/24/2025  
 Drawing No: 27647900 Rev B1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
			+25°C	
1	Frequency Range:	1 to 18 GHz	1 to 18 GHz	PMI QA4
2	Insertion Loss:	3.0 dB Max. @ -10 dBm Input	2.75 dB See Graph	
3	Input/Output VSWR:	2.0:1 Max. @ -10 dBm Input	1.93:1 See Graph	
4	Leakage:	+22 dBm Max.	17.73 dBm See Graph	
5	Recovery Time:	100 ns Max. @100W Peak Power	Pass See Typical Characteristics	
6	RF Power Handling:	100 Watt CW Max. (2, 8,14 & 18 GHz)	Pass 100 Watts CW See Graph	
		1KW Peak Max. @+85°C (1µs PW, 0.1% Duty Cycle)	Pass See Typical Characteristics	
7	Limiting Threshold (P1dB):	+12 dBm Min.	+13 dBm See Graph	PMI QA4

QA/QC Approval: *Carmona Kelly*

Date: 2/27/25

**SUMMARY TEST DATA  
ON  
LM-118-100W-22DBM**

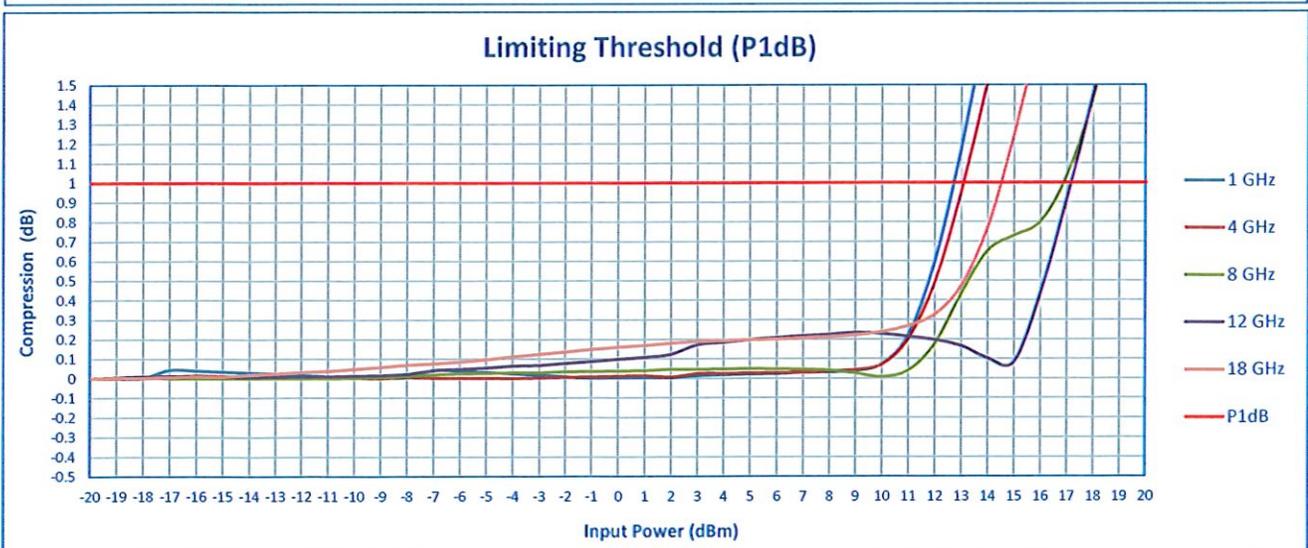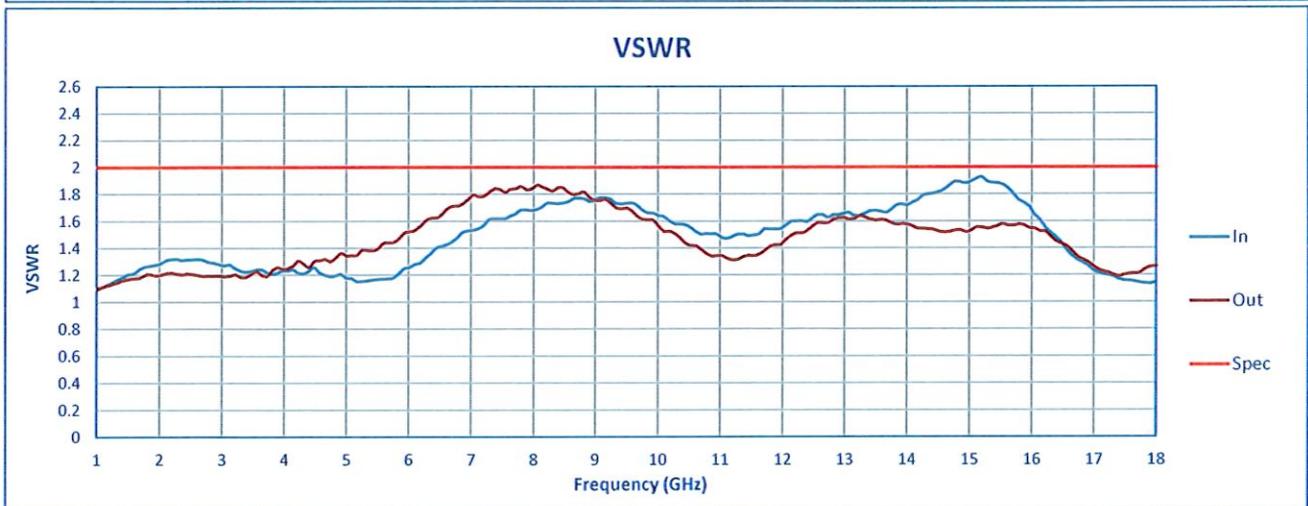

**SUMMARY TEST DATA  
ON  
LM-118-100W-22DBM**

