

**SUMMARY TEST DATA  
ON  
BPF-35D-4G-292FF**

Customer: \_\_\_\_\_  
 SO: \_\_\_\_\_  
 Model No: BPF-35D-4G-292FF  
 Serial No: PL51854/2513

Tested By: E. Kretz  
 Temperature: 25°C  
 Date: 3/24/2025  
 Drawing No: 27650720 Rev: A1




TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency Range	33 GHz to 37 GHz	32.95 GHz to 37.15 GHz 1 dB Passband	PMI QA2
2	VSWR	1.6:1 dB Max.	1.56:1	
3	Insertion Loss (Passband)	2 dB Max.	0.88 dB	
4	Rejection	60 dB Min., DC to 31 GHz	76.6 dB	
5	Rejection	60 dB Min., 39 GHz to 43 GHz	63.5 dB	
6	Input Power	5 Watts Max.	See Typical Characteristics	PMI QA2

QA/QC Approval

  
 \_\_\_\_\_  
 PMI  
 QA2

Date: 3/26/2025

**SUMMARY TEST DATA  
 ON  
 BPF-35D-4G-292FF**

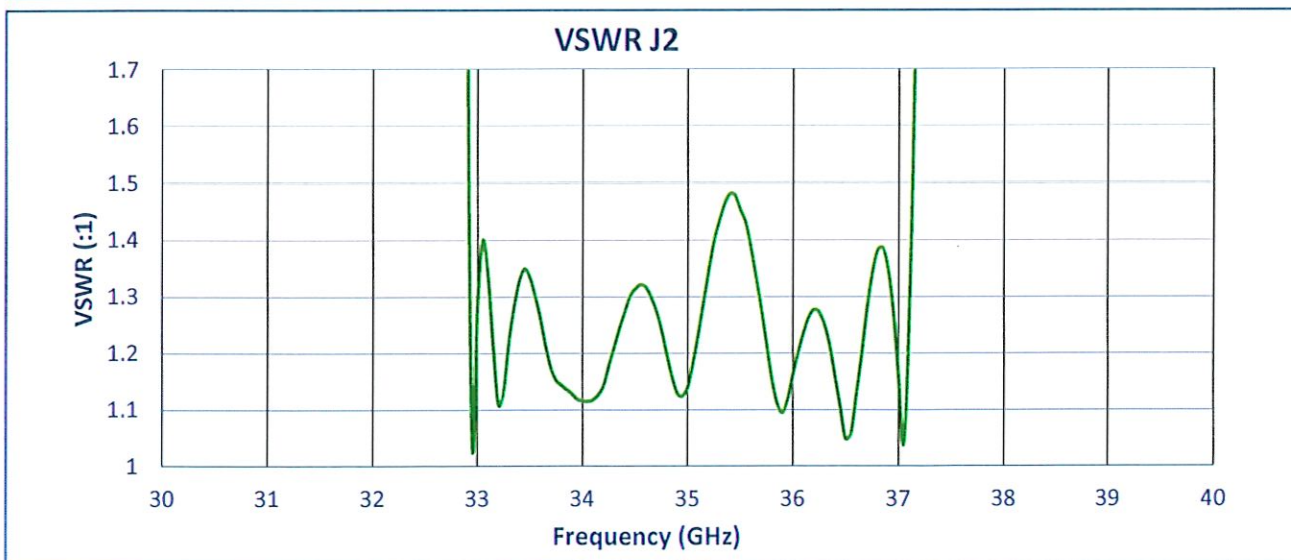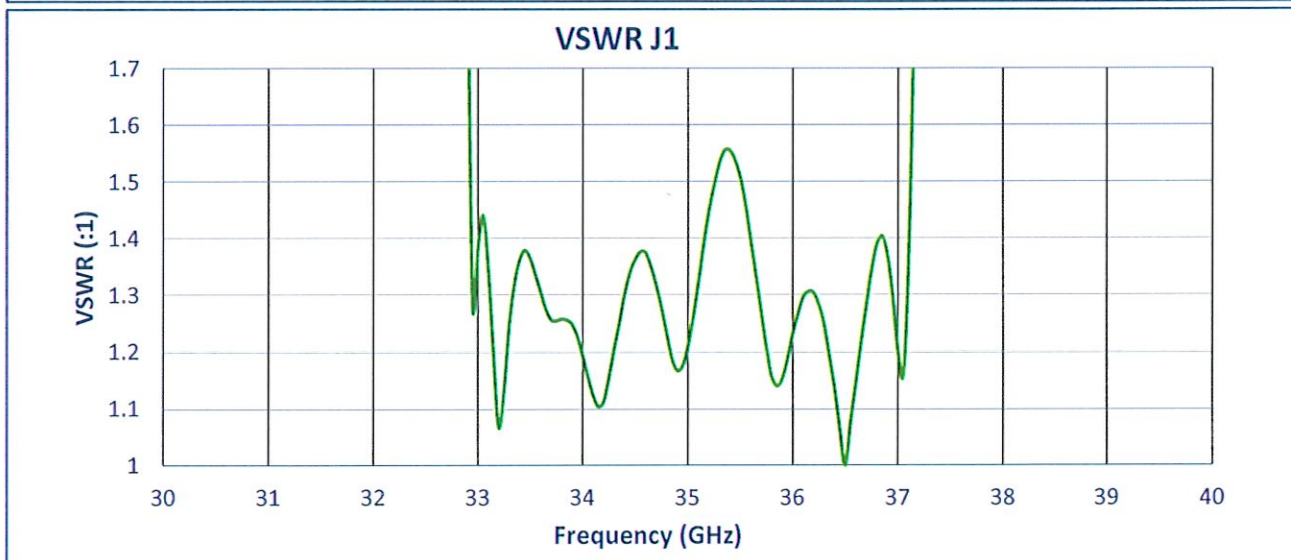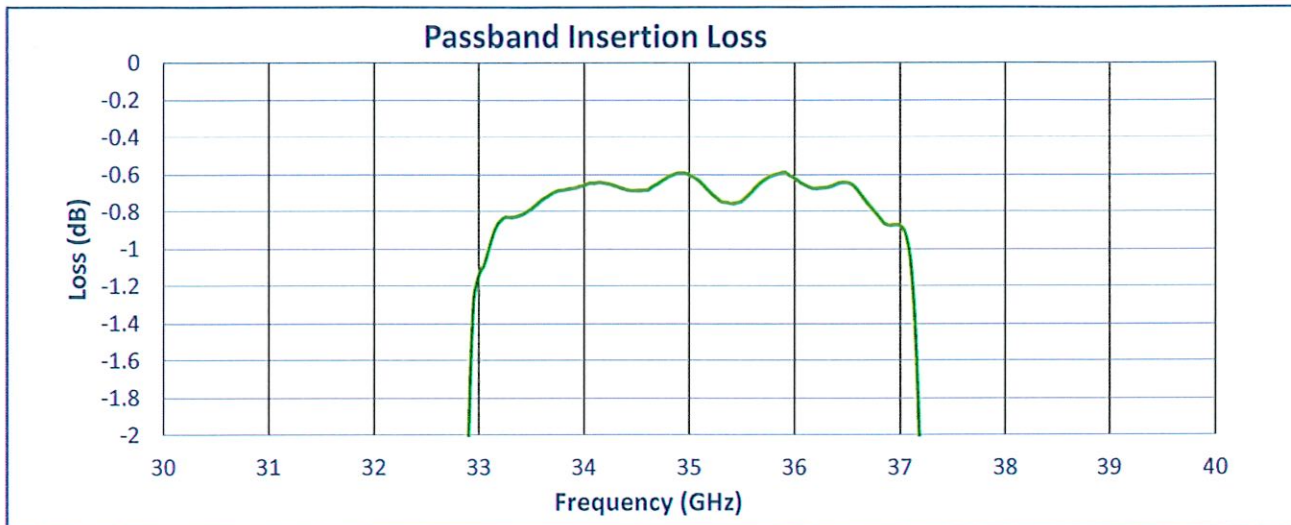

**SUMMARY TEST DATA  
ON  
BPF-35D-4G-292FF**

