

**SUMMARY TEST DATA  
 ON  
 PE2-12-30M40G-5R5-18-12-292FF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: PE2-12-30M40G-5R5-18-12-292FF  
 Serial No: PL52005/2513

Tested By: A. Lopez  
 Temperature: +25° C  
 Date: 7/11/2025  
 Drawing No: 27637300 REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	0.03 to 40.0 GHz	0.03 to 40.0 GHz	PMI QA2
2	Gain:	12dB Typ.	13.4 dB Max. 9.9 dB Min. See Plot	
3	Gain Flatness:	±2.75 dB Typ.	±1.73 dB See Plot	
4	Noise Figure: @25°C	4 dB Max. (Up to 10 GHz)	5.7 dB	
		5 dB Max. (10 to 20 GHz)	3.84 dB	
		7.5 dB Typ. (20 to 40 GHz)	6.17 dB	
			See Graphs	
5	OP1dB:	16 dBm Min.	8.78 dBm See Graph	Customer waiver
6	VSWR Input/Output:	2.2:1 Typ.	1.9:1 In 1.6:1 Out See Plot	
7	DC Supply:	+12 to +15 VDC @ 230 mA Nominal.	+12 to +15 VDC @ 79 mA	PMI QA2




(\*)Noise figure only valid above 1 GHz

QA/QC Approval: 

PMI  
QA2

Date: 7/11/2025

## SUMMARY TEST DATA ON PE2-12-30M40G-5R5-18-12-292FF

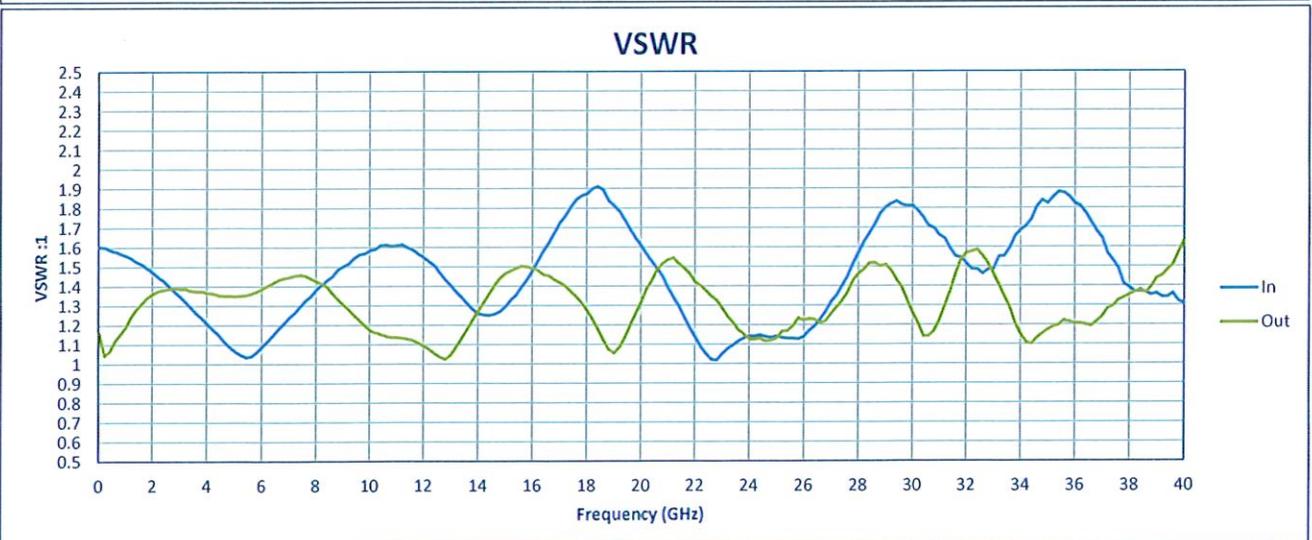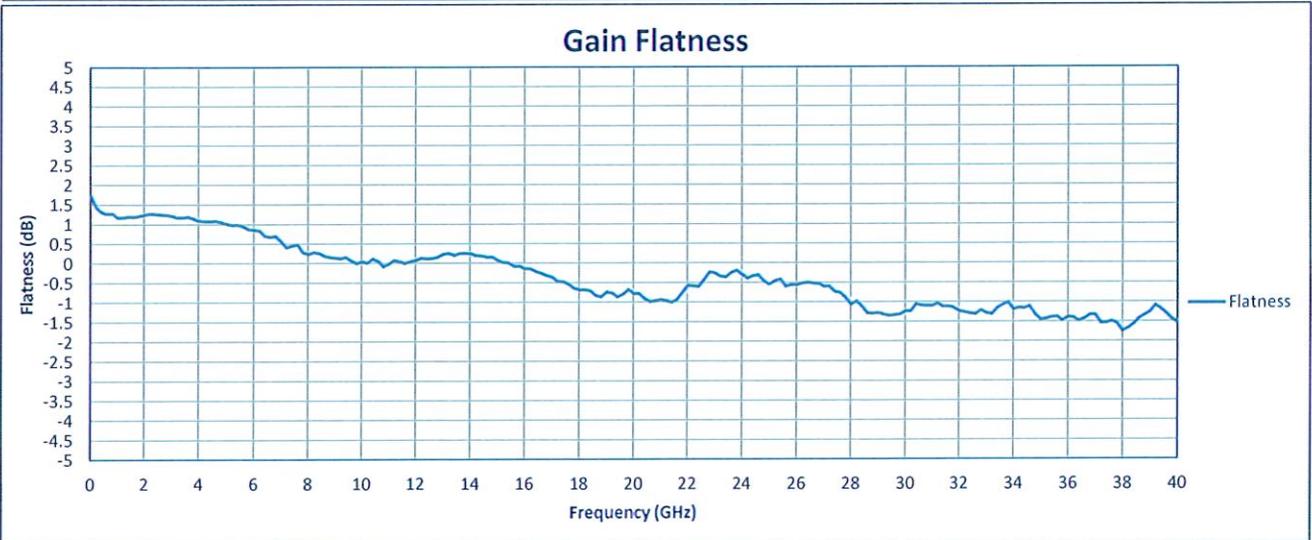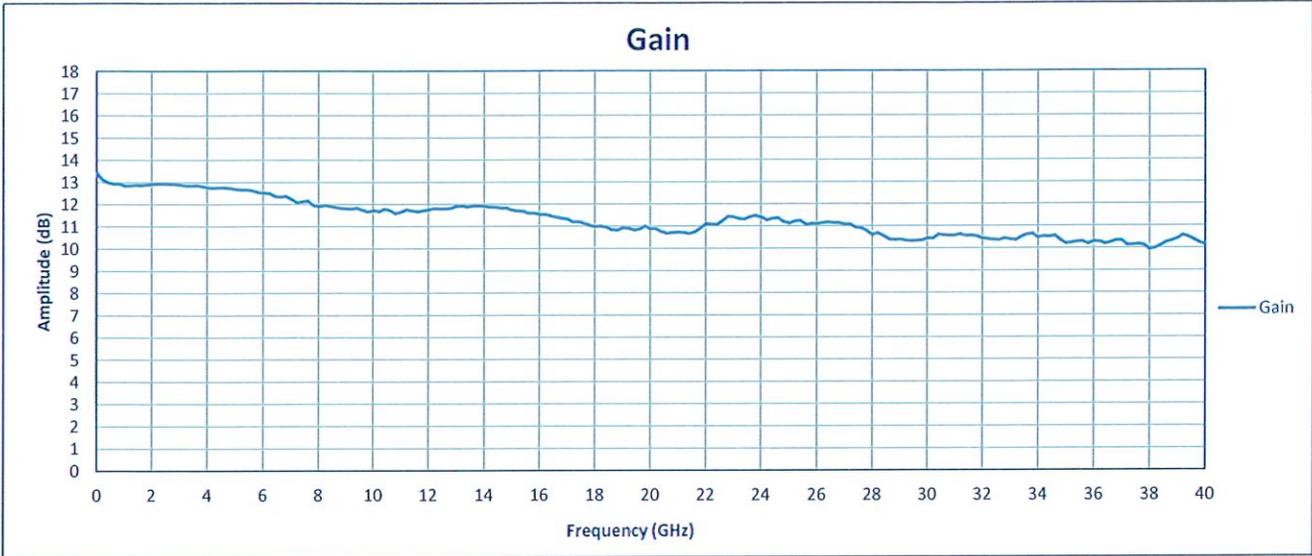

**SUMMARY TEST DATA  
 ON  
 PE2-12-30M40G-5R5-18-12-292FF**

