



**SUMMARY TEST DATA
ON
PMC-600M3G500M-SFF**

Customer: _____
 SO No: _____
 Model No: PMC-600M3G500M-SFF
 Serial No: PL52025/2514



Tested By: E. Kretz
 Temperature: +25°C
 Date: 3/31/2025
 Drawing No: 27650440 REV: A1



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC	
1	Frequency Range:	0.6 GHz TO 3.5 GHz	0.6 GHz TO 3.5 GHz	PMI QA2	
2	Insertion Loss:	6.5 dB Max.	5.71 dB See Graph		
3	Nominal Split:	6.02 dB	6.02 dB		
4	Amplitude Balance:	±3.2 dB Max.	±2.44 dB See Graph		
5	Phase Balance:	±15° Max.	±5.7° See Graph		
6	Isolation:	18 dB Min.	21 dB		
7	VSWR:	1.70:1 Max	1.4:1 See Graph		
8	Power Handling:	Average: 30 W Max. Peak: 1 kW Max.	See Typical Characteristics		PMI QA2





QA/QC Approval: PMI QA2

Date: 4/8/2025

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
 Email: sales@quanticpmi.com

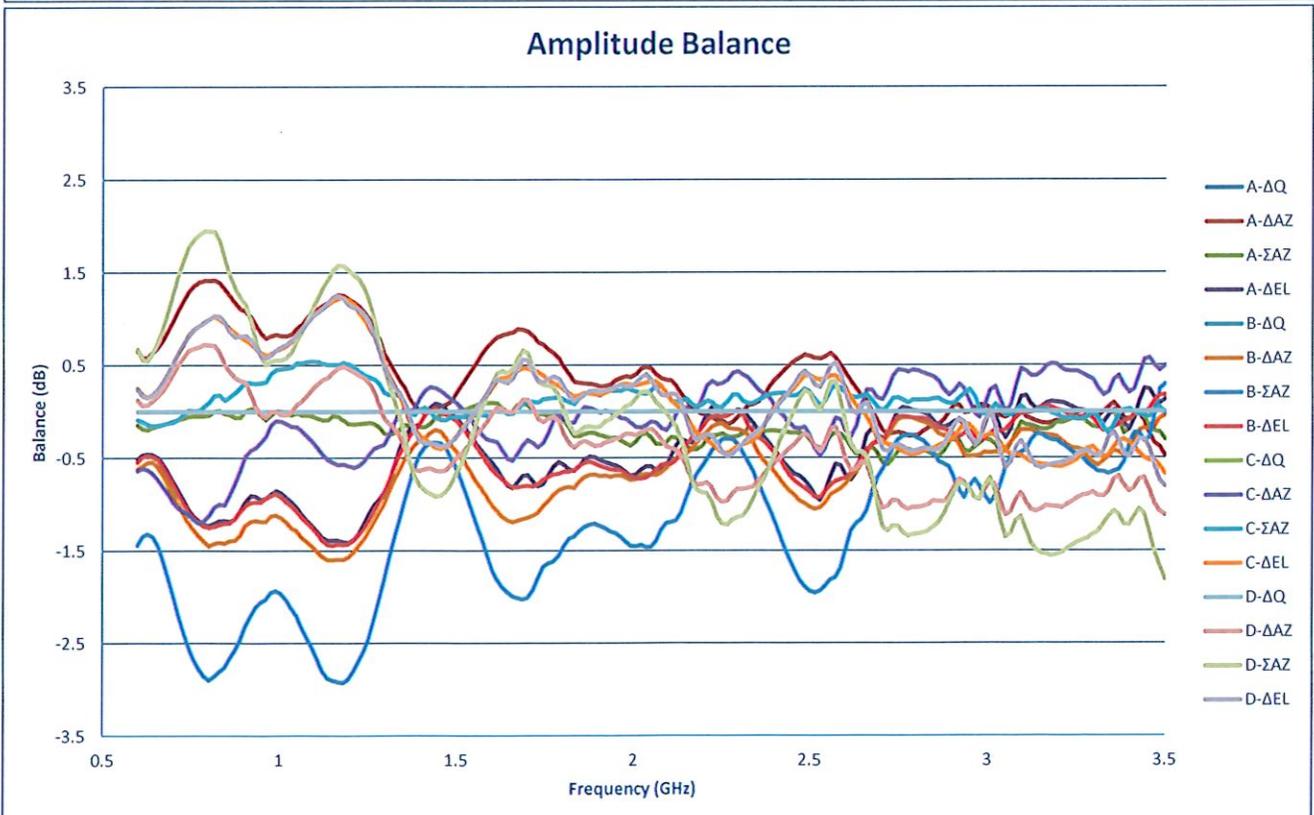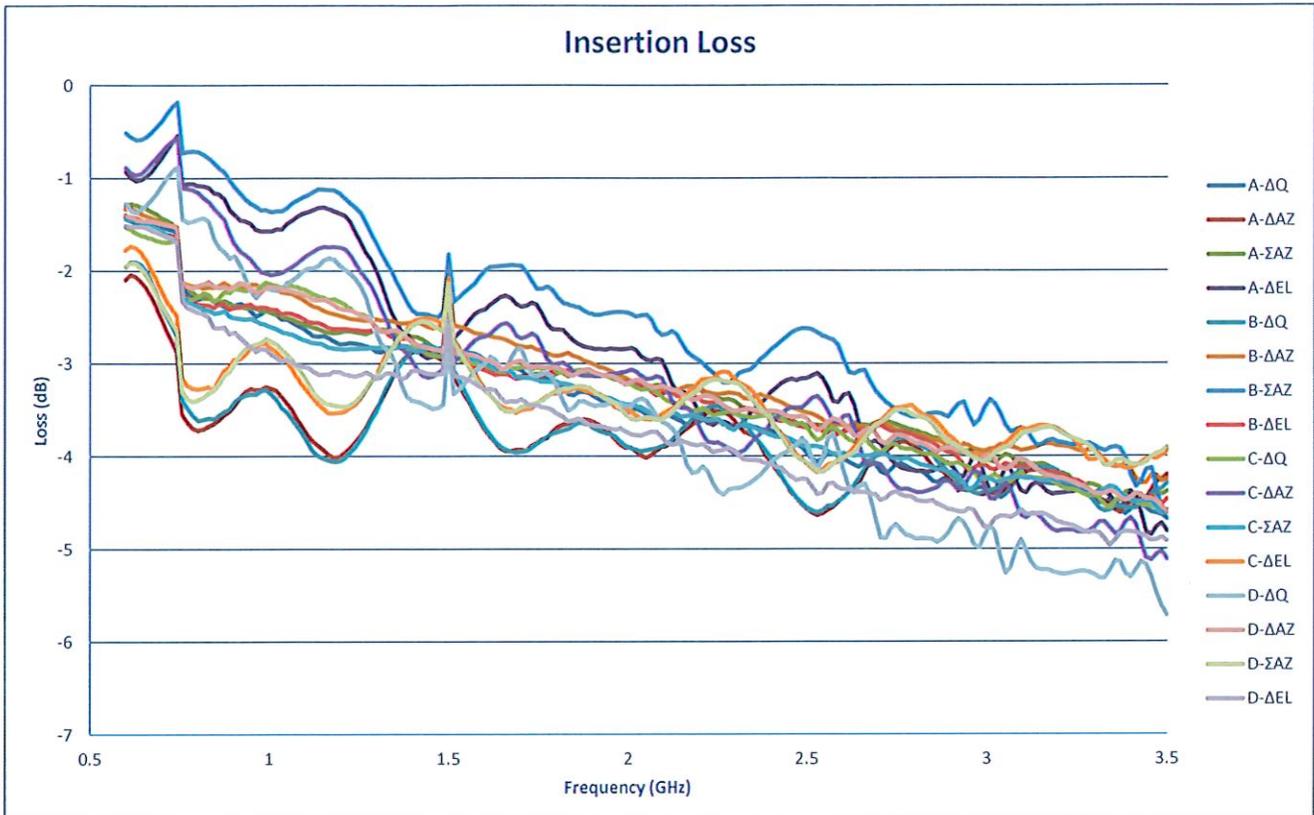

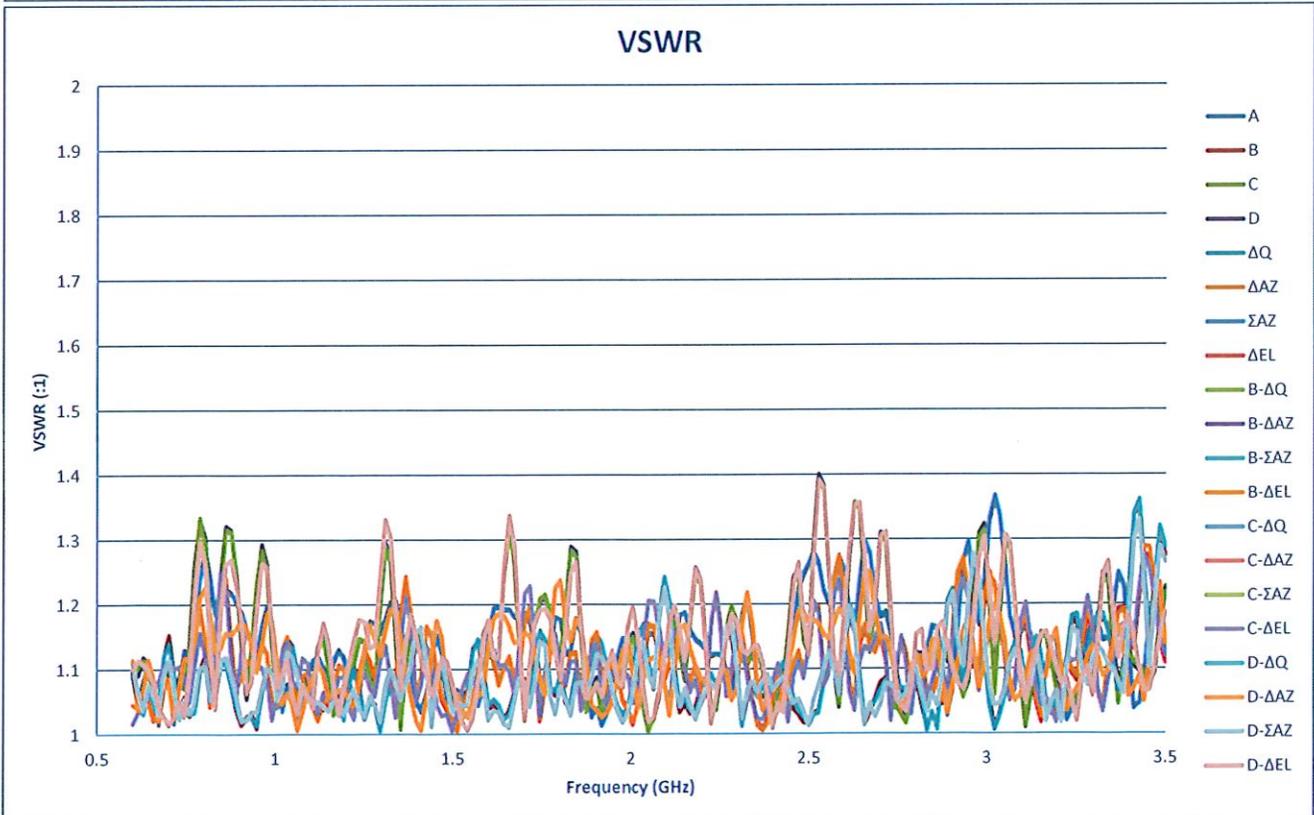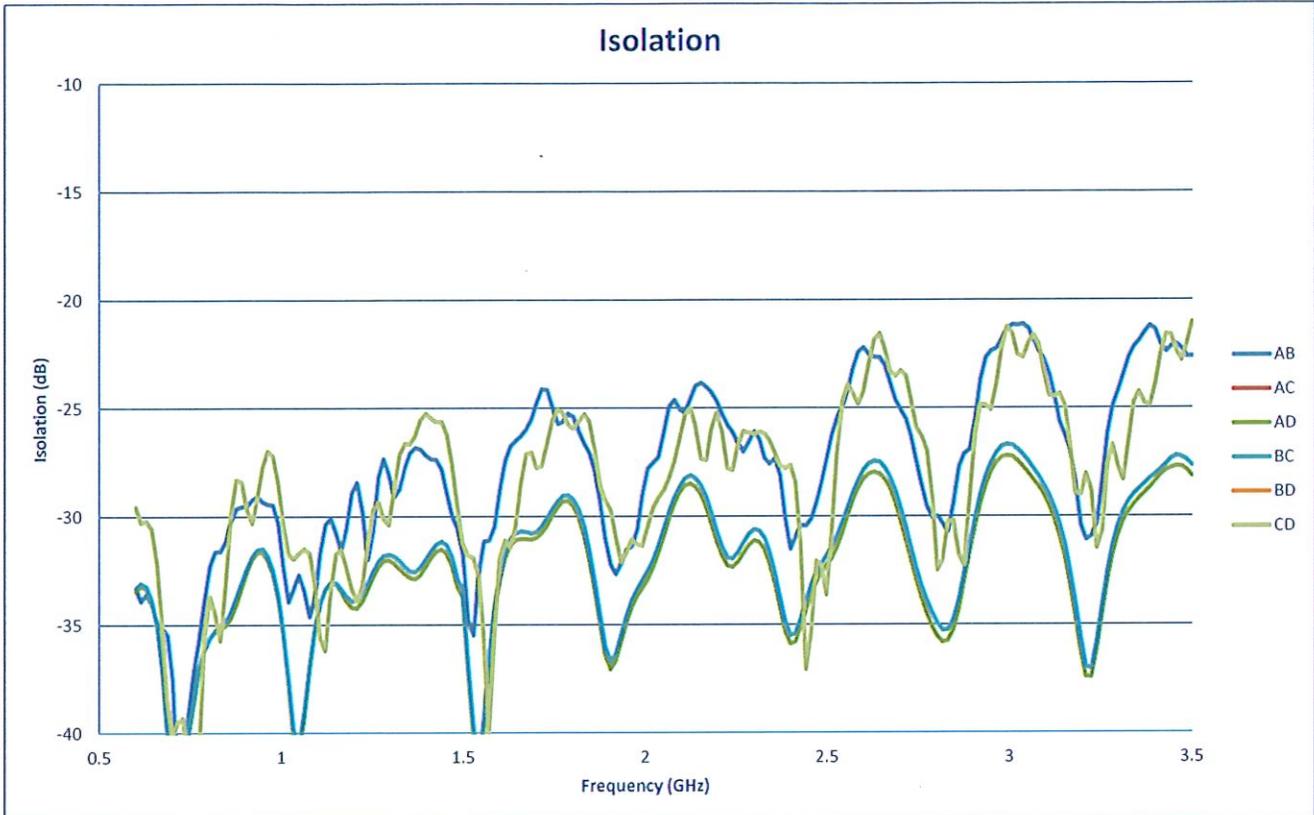

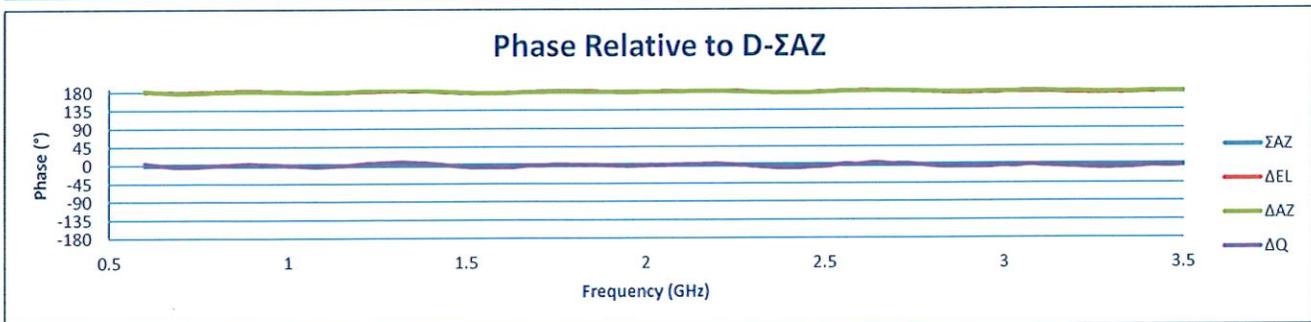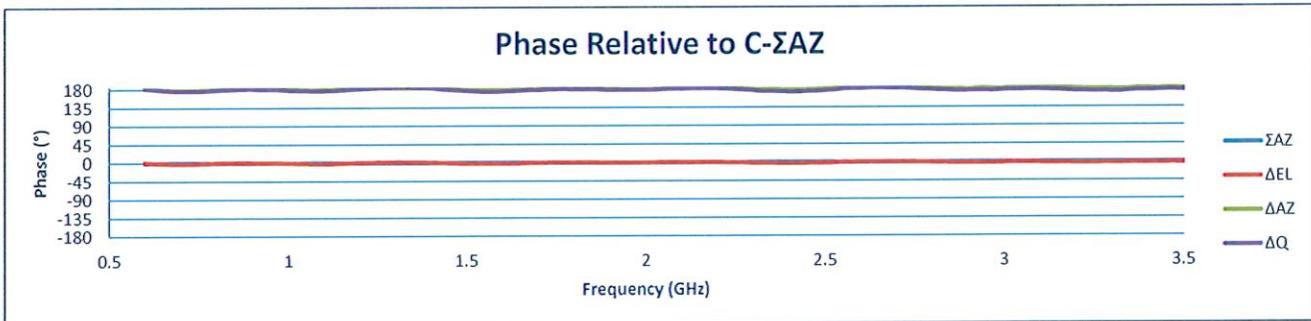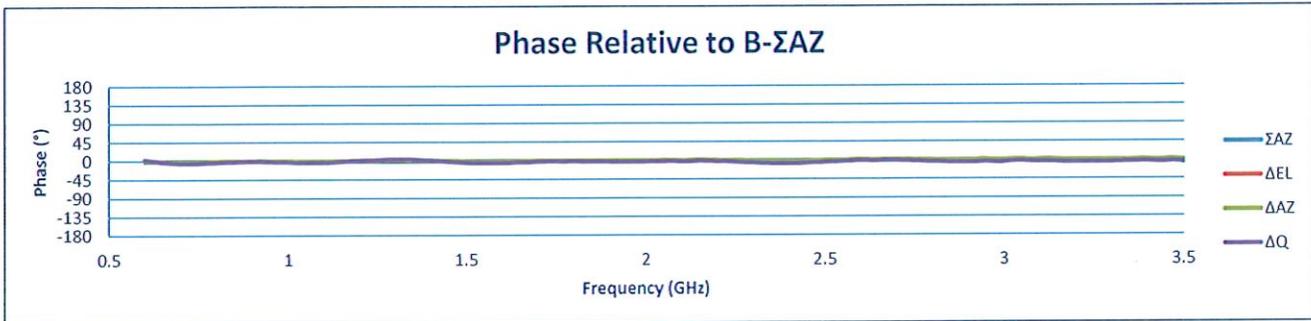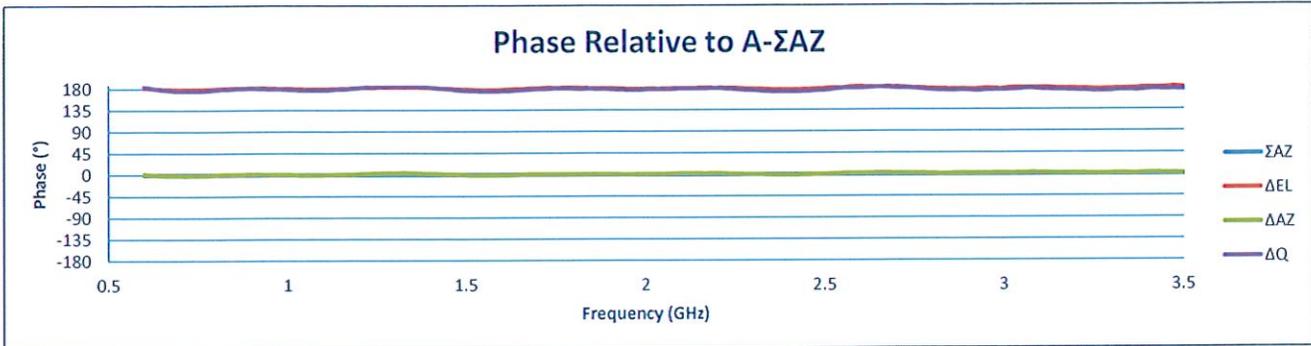

Phase Data Relative to ΣAZ	A	B	C	D	ΣAZ	ΔAZ	ΔEL	ΔQ	
	A	-	Isolation	Isolation	Isolation	0°	1°	181°	180°
	B	Isolation	-	Isolation	Isolation	0°	1°	0°	-1°
	C	Isolation	Isolation	-	Isolation	0°	181°	0°	180°
	D	Isolation	Isolation	Isolation	-	0°	181°	180°	0°
	ΣAZ	0°	0°	0°	0°	-	Isolation	Isolation	Isolation
	ΔAZ	1°	1°	181°	181°	Isolation	-	Isolation	Isolation
ΔEL	181°	0°	0°	180°	Isolation	Isolation	-	Isolation	
ΔQ	180°	-1°	180°	0°	Isolation	Isolation	Isolation	-	