

**SUMMARY TEST DATA  
 ON  
 PE2-12-30M40G-5R5-18-12-292FF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: PE2-12-30M40G-5R5-18-12-292FF  
 Serial No: PL52040/2514

Tested By: A. Lopez  
 Temperature: +25° C  
 Date: 7/11/2025  
 Drawing No: 27637300 REV: A1




TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	0.03 to 40.0 GHz	0.03 to 40.0 GHz	PMI QA2
2	Gain:	12dB Typ.	13.7 dB Max. 10.5 dB Min. See Plot	PMI QA2
3	Gain Flatness:	±2.75 dB Typ.	±1.6 dB See Plot	
4	Noise Figure: @25°C	4 dB Max. (Up to 10 GHz)	6.28 dB	
		5 dB Max. (10 to 20 GHz)	4.04 dB	
		7.5 dB Typ. (20 to 40 GHz)	6.4 dB	
			See Graphs	
5	OP1dB:	16 dBm Min.	8.88 dB m See Graph	Customer waiver
6	VSWR Input/Output:	2.2:1 Typ.	1.9:1 In 1.8:1 Out See Plot	PMI QA2
7	DC Supply:	+12 to +15 VDC @ 230 mA Nominal.	+12 to +15 VDC @ 86 mA	PMI QA2

(\*)Noise figure only valid above 1 GHz

QA/QC Approval:  PMI  
QA2

Date: 7/11/2025

**SUMMARY TEST DATA  
 ON  
 PE2-12-30M40G-5R5-18-12-292FF**

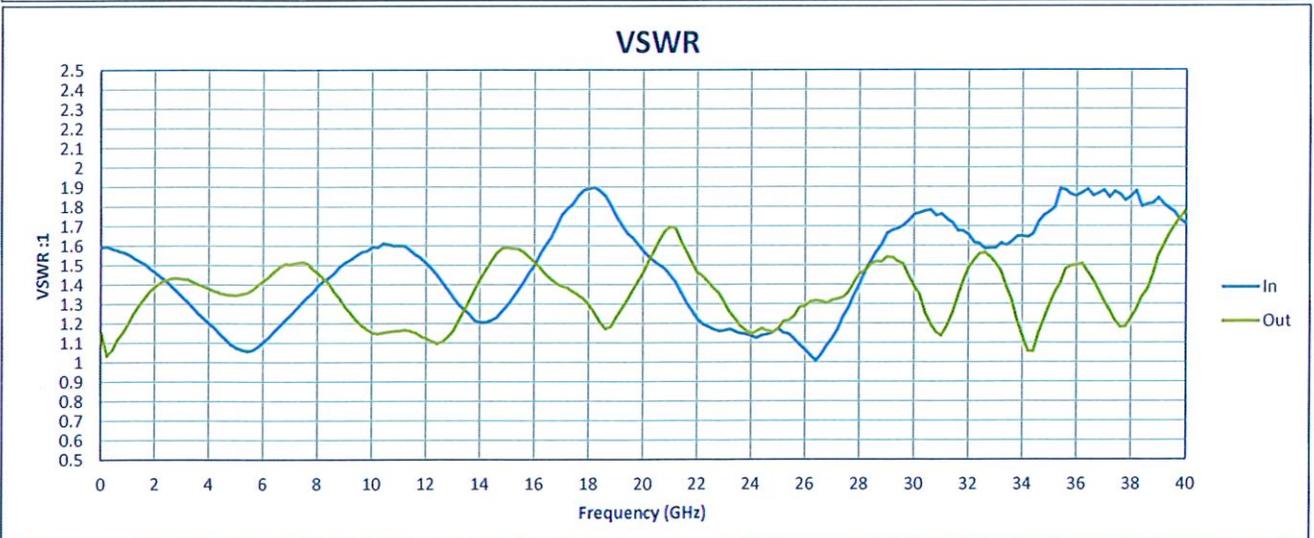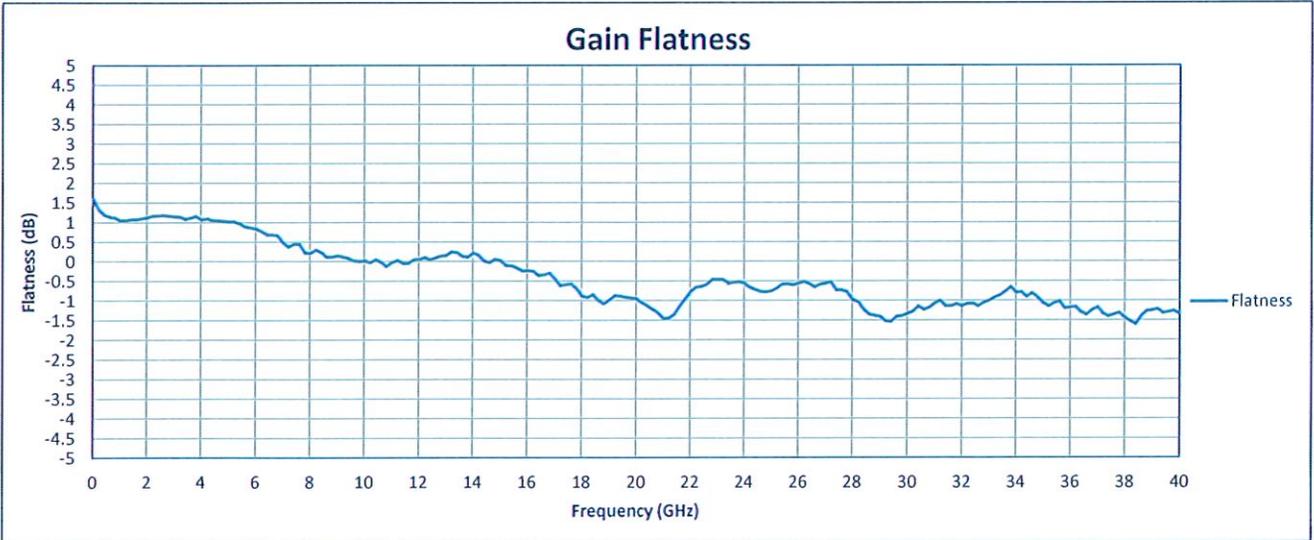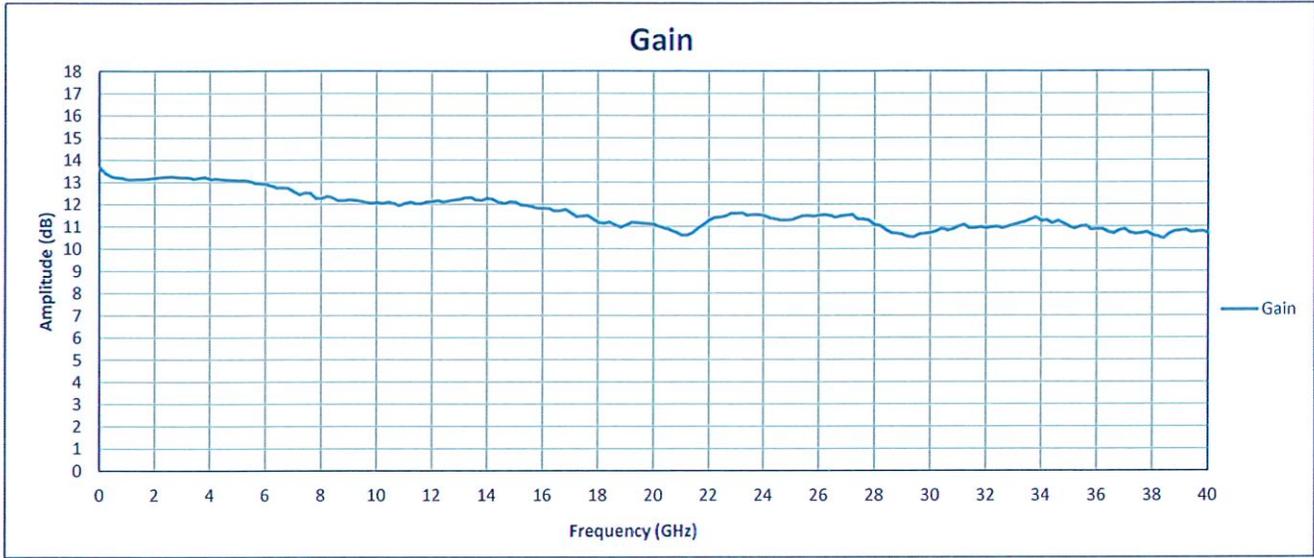



# SUMMARY TEST DATA ON PE2-12-30M40G-5R5-18-12-292FF

