



SUMMARY TEST DATA ON PMC-9G10G-7D9-SFF

Customer: _____
 SO No: _____
 Model No: PMC-9G10G-7D9-SFF
 Serial No: PL52282/2515

Tested By: E. Kretz
 Temperature: +25°C
 Date: 4/9/2025
 Drawing No: 27635520 REV: A1



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	9.0 GHz to 10.0 GHz	9.0 GHz to 10.0 GHz	PAI QA
2	Insertion Loss:	1.9 dB Max. (If input signals at ports A, B, C and D are equal Amplitude or Power & Inphase with an output at Port ΣAZ)	0.95 dB See Graph	
3	Insertion Loss:	7.9 dB Max (If input signals at port A, B, C or D and all other ports are terminated to 50 Ohms with an output at ports ΣAZ, ΔEL, ΔAZ, or ΔQ)	6.97 dB See Graph	
4	Amplitude Balance:	±0.6 dB Max.	+0.41 dB -0.38 dB See Graph	
5	Phase Balance:	±6° Max.	±4.79°	
6	Isolation:	18 dB Min.	21 dB	
7	VSWR:	1.6:1 Max.	1.37:1 See Graph	
8	Power Handling:	Average: 10 W Max. (Port A, B, C, & D) Peak: 0.1 kW Max.	See Typical Characteristics	PAI QA



QA/QC Approval: *Camryn Kelso*

Date: 4/9/25





7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
 Email: sales@quanticpmi.com

**SUMMARY TEST DATA
ON
PMC-9G10G-7D9-SFF**

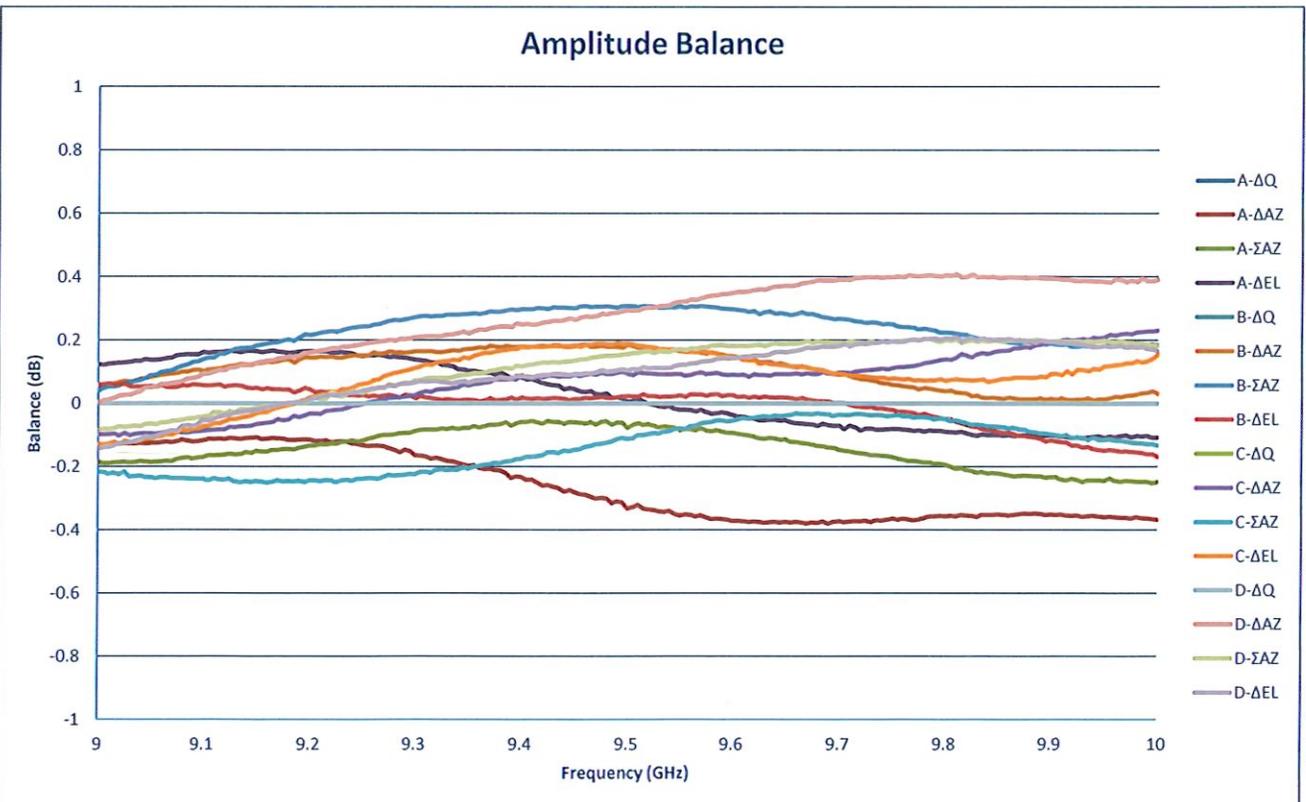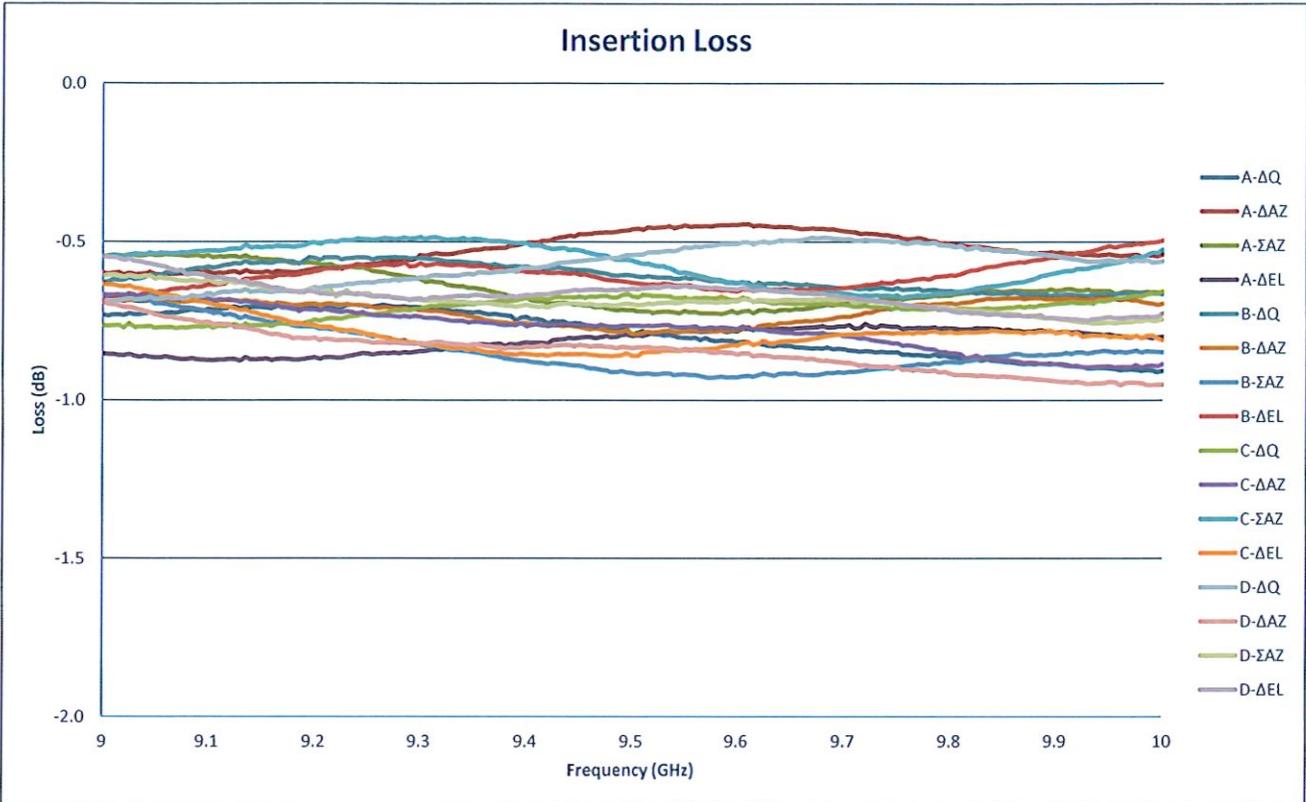

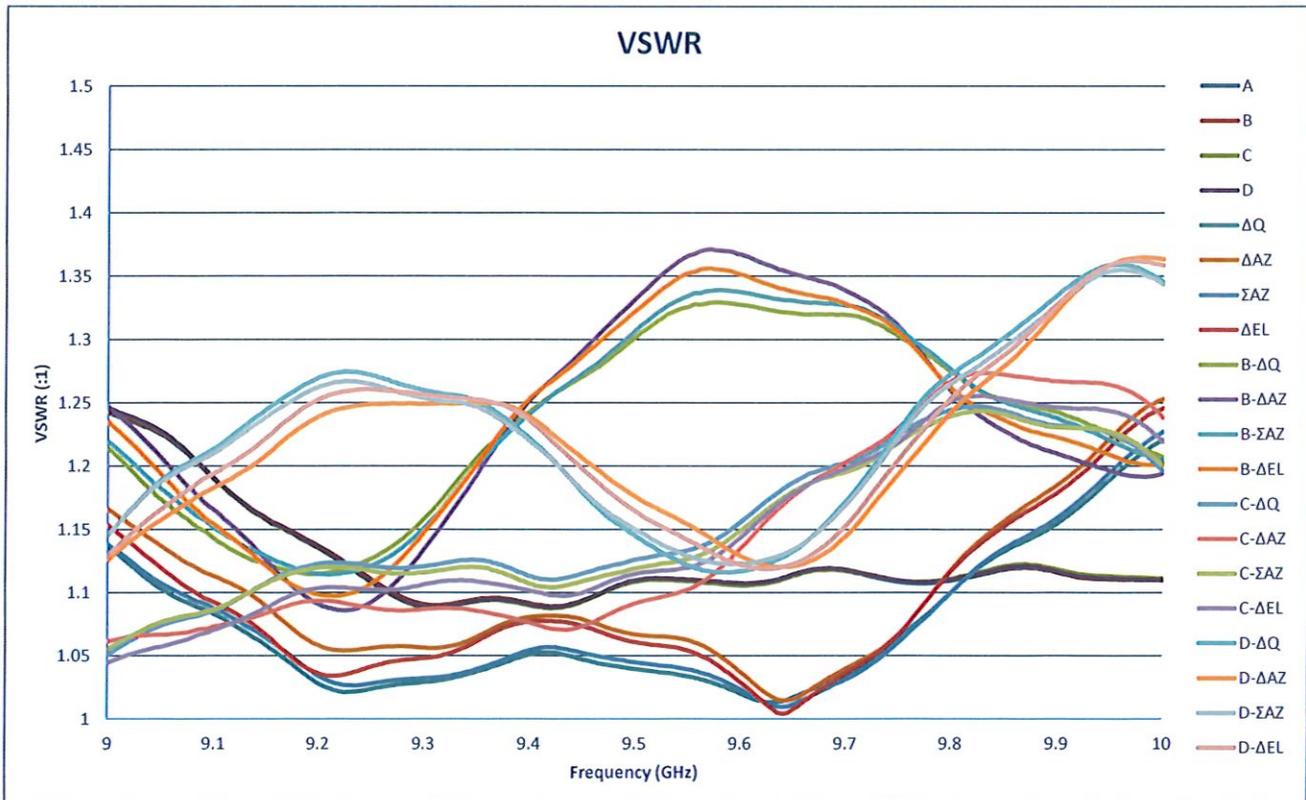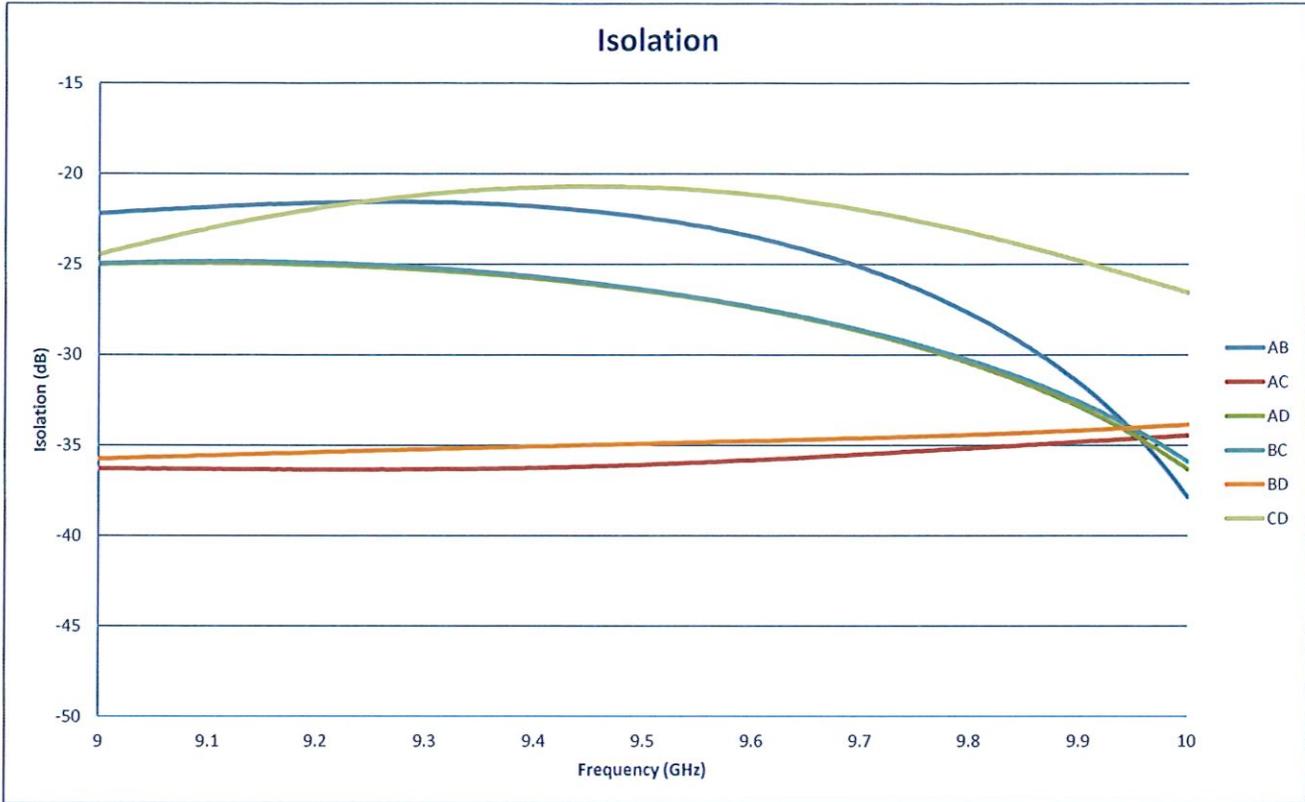

**SUMMARY TEST DATA
ON
PMC-9G10G-7D9-SFF**

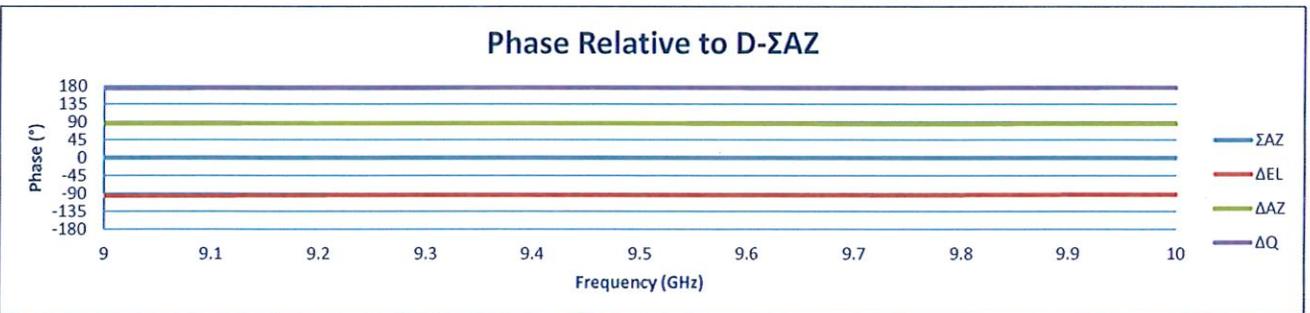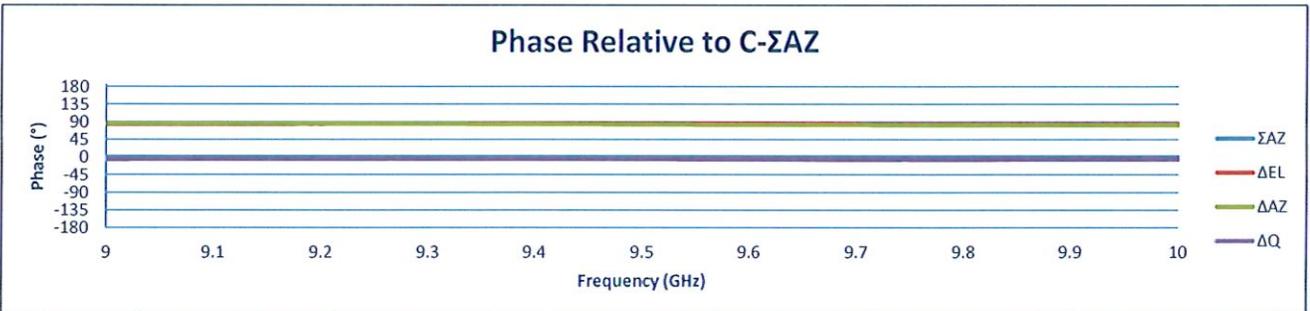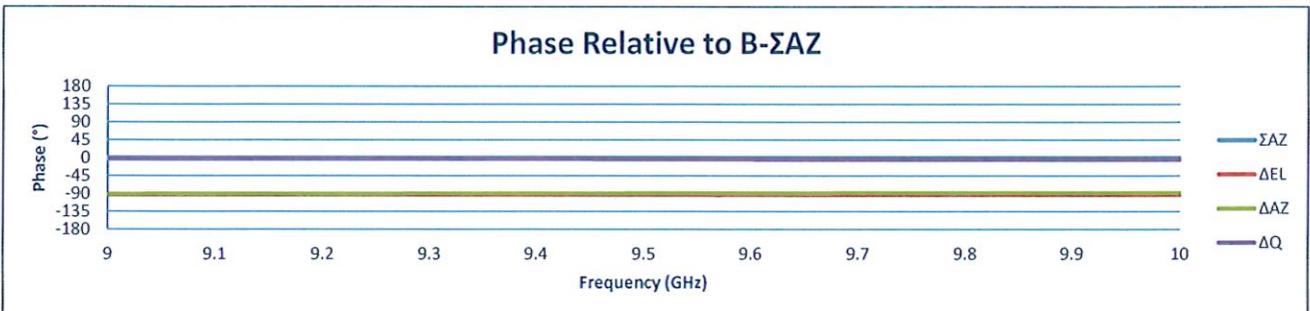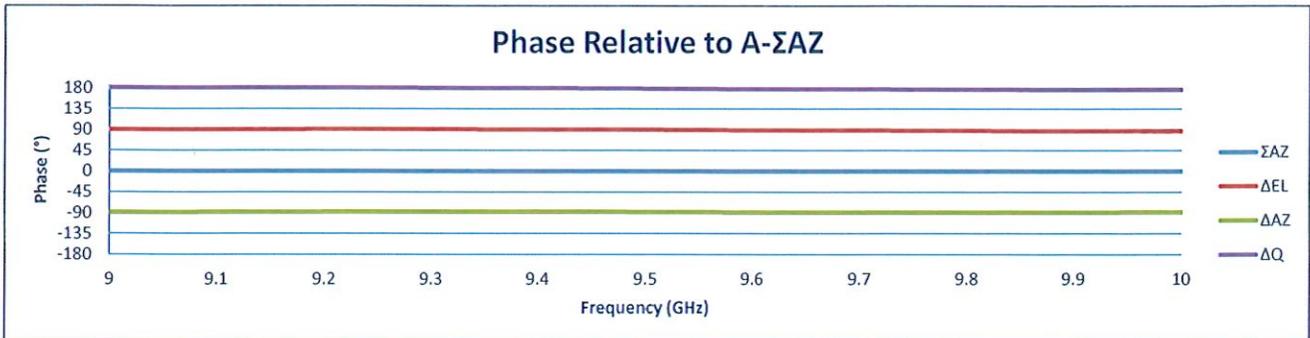

Phase Data Relative to ΣAZ	A	B	C	D	ΣAZ	ΔEL	ΔQ	ΔAZ	
	A	-	Isolation	Isolation	Isolation	0°	89°	179°	-89°
	B	Isolation	-	Isolation	Isolation	0°	-92°	-3°	-90°
	C	Isolation	Isolation	-	Isolation	0°	85°	-5°	84°
	D	Isolation	Isolation	Isolation	-	0°	-94°	176°	86°
	ΣAZ	0°	0°	0°	0°	-	Isolation	Isolation	Isolation
	ΔEL	89°	-92°	85°	-94°	Isolation	-	Isolation	Isolation
	ΔQ	179°	-3°	-5°	176°	Isolation	Isolation	-	Isolation
	ΔAZ	-89°	-90°	84°	86°	Isolation	Isolation	Isolation	-