



**SUMMARY TEST DATA  
ON  
BPF-3D96G-65M-SFF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: BPF-3D96G-65M-SFF  
 Serial No: PL52310/2515



Tested by: E. Kretz  
 Temperature: 25°C  
 Date: 4/9/2025  
 Drawing No: 27648260 Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA
			25°C	QC
1	Passband Frequency Range	3.9275 GHz to 3.9925 GHz	3.9275 GHz to 3.9925 GHz	
2	Insertion Loss	1.4 dB Max.	0.74 dB	
3	VSWR	1.4:1 Max.	1.08 : 1	
4	Center Frequency	3.96 GHz	3.96 GHz	
5	Rejection	40 dBc Min., DC to 3.8 GHz	50.34 dBc	
6	Input Power	20 Watts MAX	20 W	




QA/QC Approval: *Camurany Veloz*

Date: 4/10/25

**SUMMARY TEST DATA  
 ON  
 BPF-3D96G-65M-SFF**

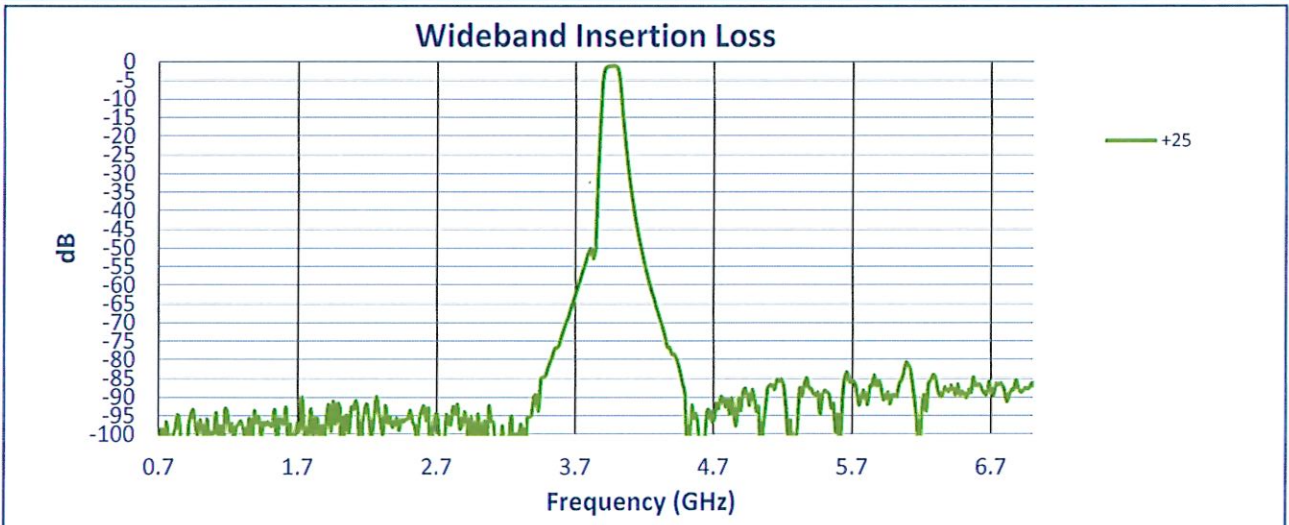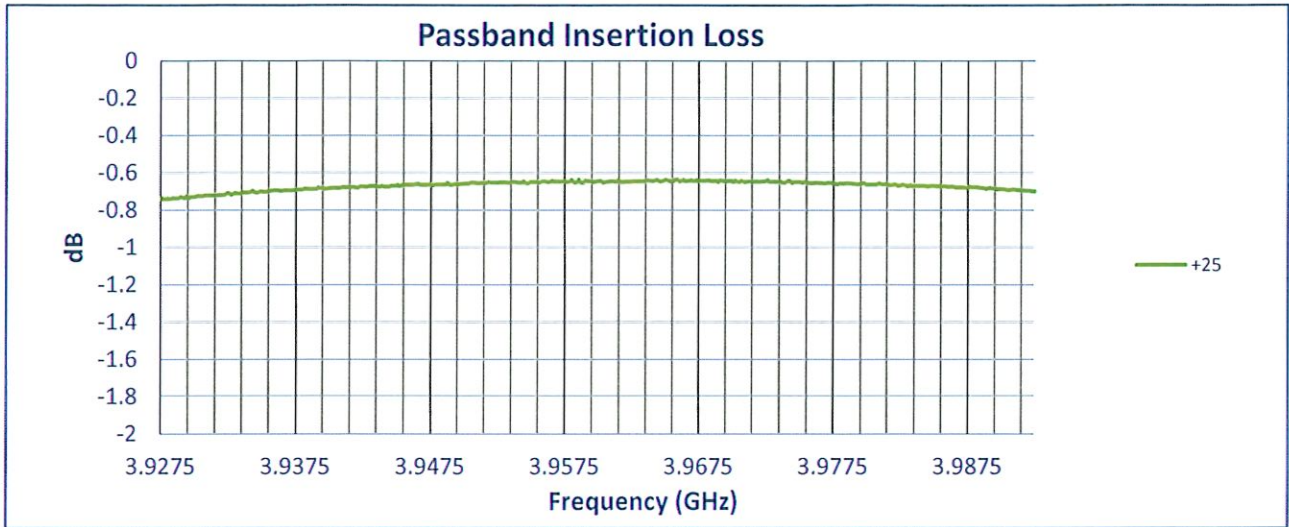

**SUMMARY TEST DATA  
ON  
BPF-3D96G-65M-SFF**

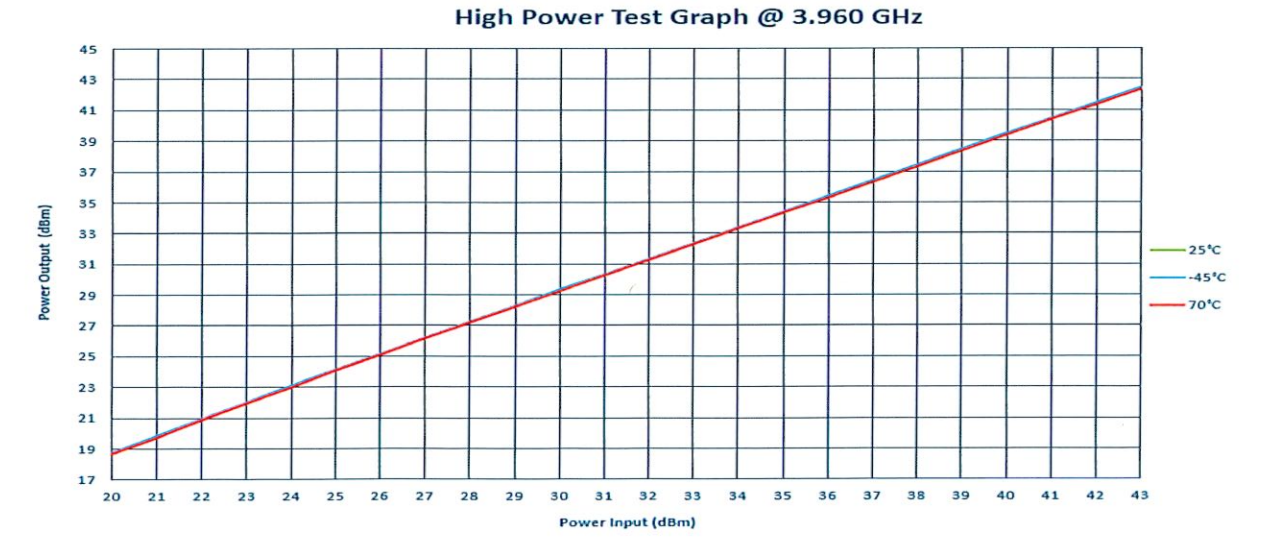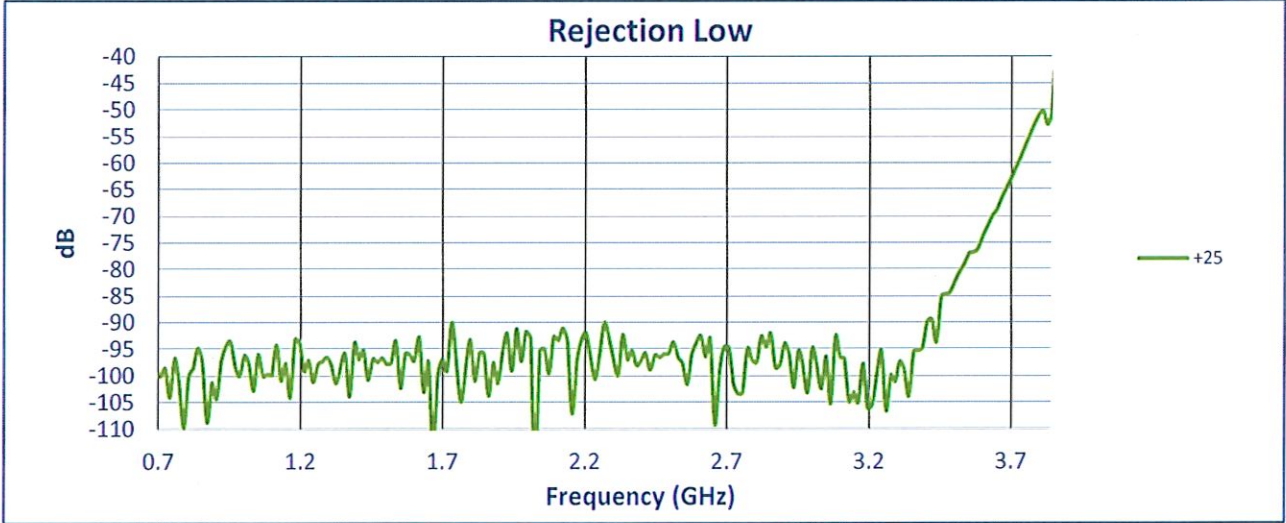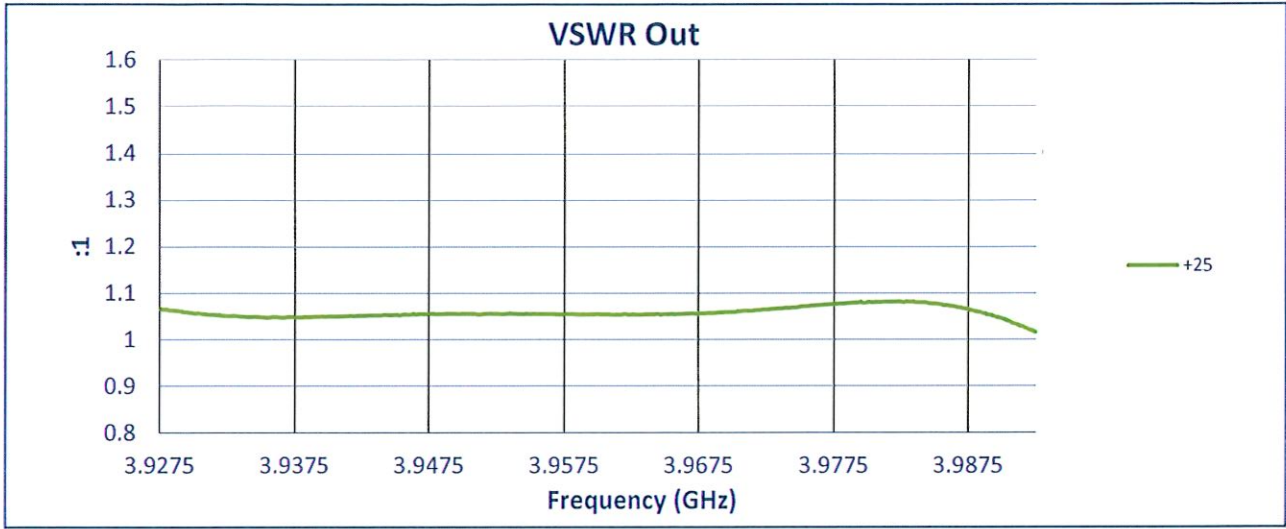

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
Email: sales@quanticpmi.com