

**SUMMARY TEST DATA
ON
PEC3-33-218-20-15-SFF-HS-E**

Customer: _____

SO No: _____

Model No: PEC3-33-218-20-15-SFF-HS-E

Serial No: PL52733/2519

Tested By: Justen Gayduchik

Temperature: +25° C

Date: 8/20/2026

Drawing No: 26902311-E REV: G1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	2 GHz to 18 GHz	2 GHz to 18 GHz	PMI QA6
2	Gain:	+33 dB Min.	34.57 dB Min. See Plot	
3	Gain Flatness:	±2.0 dB Max.	±1.39 dB See Plot	
4	Noise Figure:	4.0 dB Typ. (5.0 dB Max. at Band Edges)	4.1 dB Max. See Plot	
5	OP1dB:	+20 dBm Min.	+20.59 dBm Min. See Plot	
6	OIP3:	+30 dBm Typ.	Pass	
7	Input Power Handling:	+17 dBm Max.	Pass	
8	VSWR (In/Out):	2.2:1 Max.	Input 2.10:1 Output 1.70:1 See Plot	
9	DC Supply:	+15 VDC @ 350 mA Typ., 450 mA Max.	380 mA	

QA/QC Approval:


Anthony Karoly
7309-A Grove Road, Frederick, MD 21704 USA Phone: 301-221-1111
Email: sales@carolys.com

PMI
QA6


Date: 8/20/26

7309-A Grove Road, Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com


Small Signal Gain

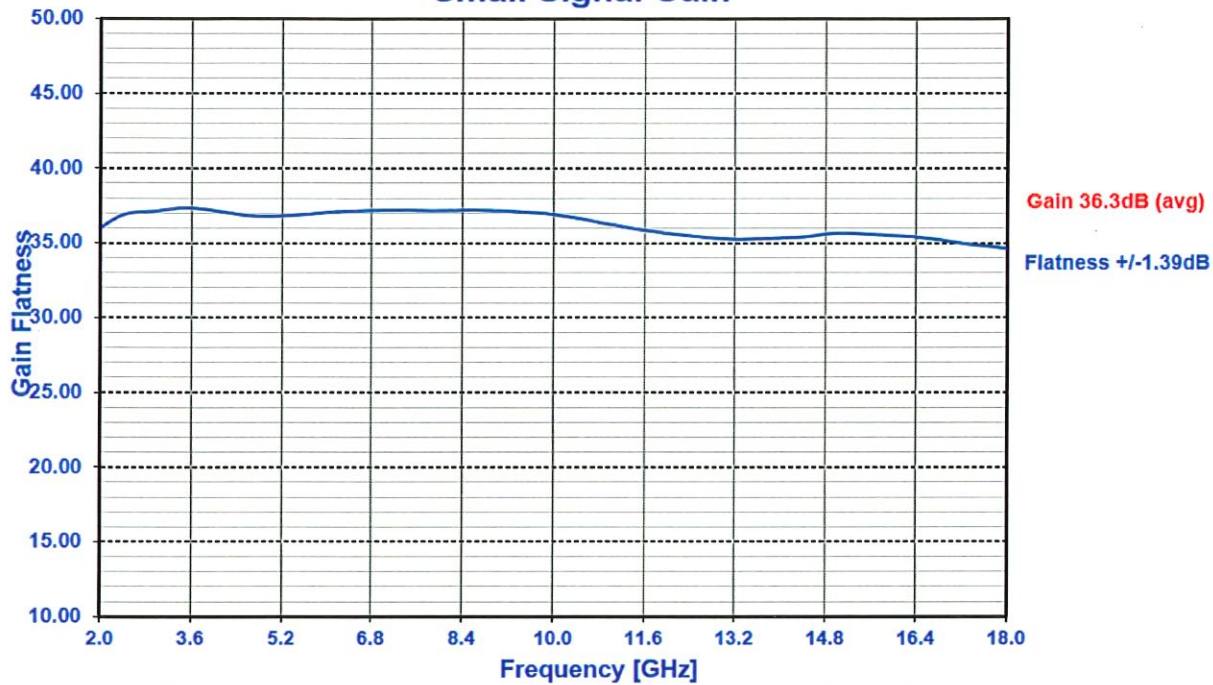

VSWR GRAPH

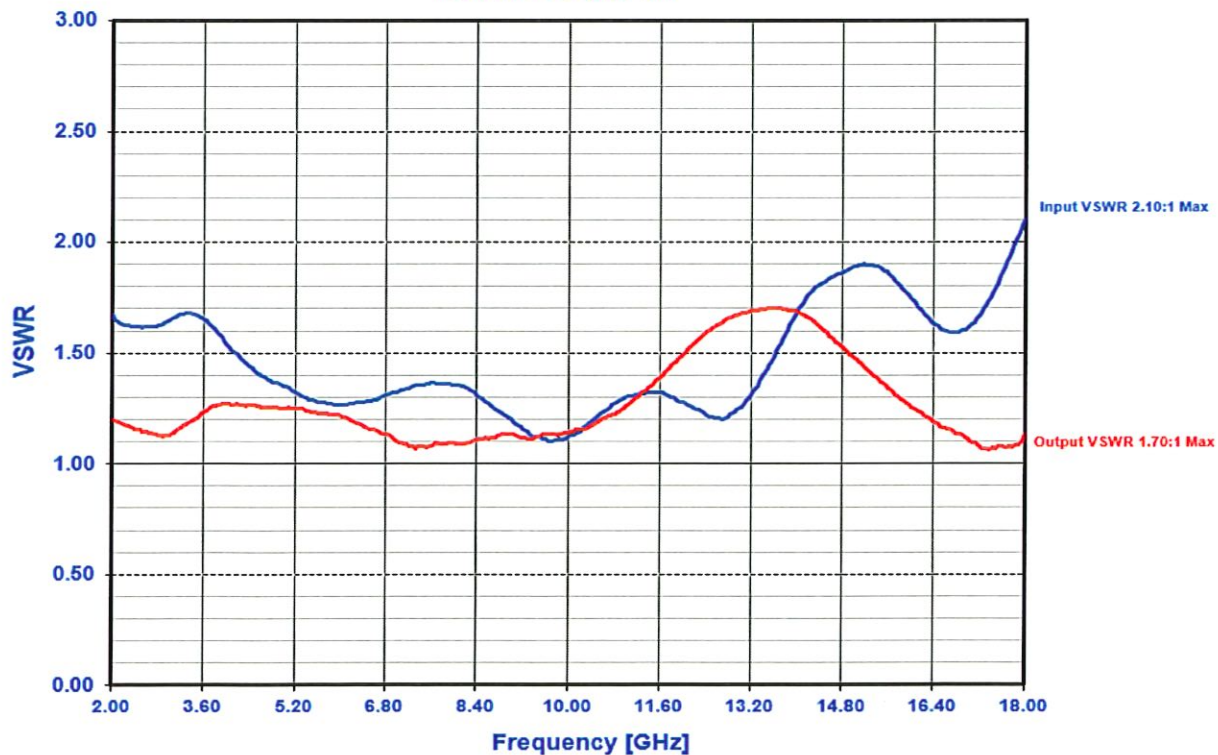

Noise Figure

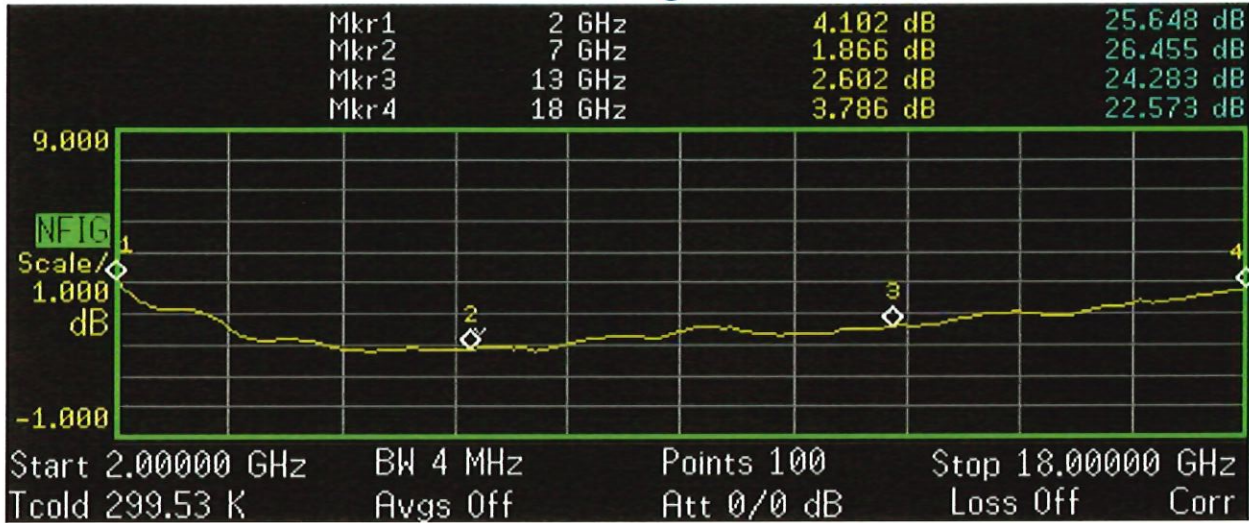

1dB Compression vs Frequency

