



SUMMARY TEST ON P1T-DC18-60-T-SFF-HSLVT-LSC

Customer: _____
 SO No: _____
 Model No: P1T-DC18-60-T-SFF-HSLVT-LSC
 Serial No: PL53663/2526
 Leakage test Ref : PL53662/2526




Tested By: Alfredo Lopez
 Temperature: +25° C
 Date: 2/3/2026
 Drawing No: 27628081 REV: A2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA
			+25°C	QC
1	Frequency Range:	DC to 18 GHz	DC to 18 GHz	PMI QA2
2	Insertion Loss:	4.5 dB Max.	3.84 dB See Graph	
3	Isolation:	55 dB Min. (10 MHz-2GHz) 60 dB Min. (2-12 GHz) 70 dB Min. (12-18 GHz)	59.84 dB	
			61.53 dB	
			74.89 dB	
			See Graphs	
4	Leakage Unit to Unit:	60 dB Min. (10 MHz-1 GHz) 90 dB Min. (1 - 18 GHz)	60.23 dB	
			92.29 dB See Graphs	
5	Leakage TTL Port:	60 dB Min (10 MHz-12 GHz) 70 dB Min (12-18 GHz)	57.57 dB	
			86.01 dB	
			See Graph	
6	VSWR: In/Out	2.0:1 Max.	1.79 :1 See Graphs	
7	Rise time: Fall time: Speed ON: Speed OFF:	10 ns Max. 10 ns Max. 30 ns Max. 25 ns Max.	4.82 ns	
			3.82 ns	
			28.8 ns	
			18.56 ns	
			See Plots	
8	Spectral Emissions During Switching: (Spectrum Content)	50 dBm Min. (10 MHz to 0.5 GHz) 80 dBm Min. (0.5 to 18 GHz) 1.0 kHz VBW/RBW	52.19 dBm	
			92.05 dBm	
			See Plots	
9	Control Signal:	TTL LOGIC '0' : Insertion Loss '1' : Isolation	TTL LOGIC '0' : Insertion Loss '1' : Isolation	
10	Power Supply:	-5 V @ 25 mA Max.	-5 V @ 16 mA	PMI QA2

QA/QC Approval: PMI
QA2

Date: 2/4/2026


SUMMARY TEST ON P1T-DC18-60-T-SFF-HSLVT-LSC

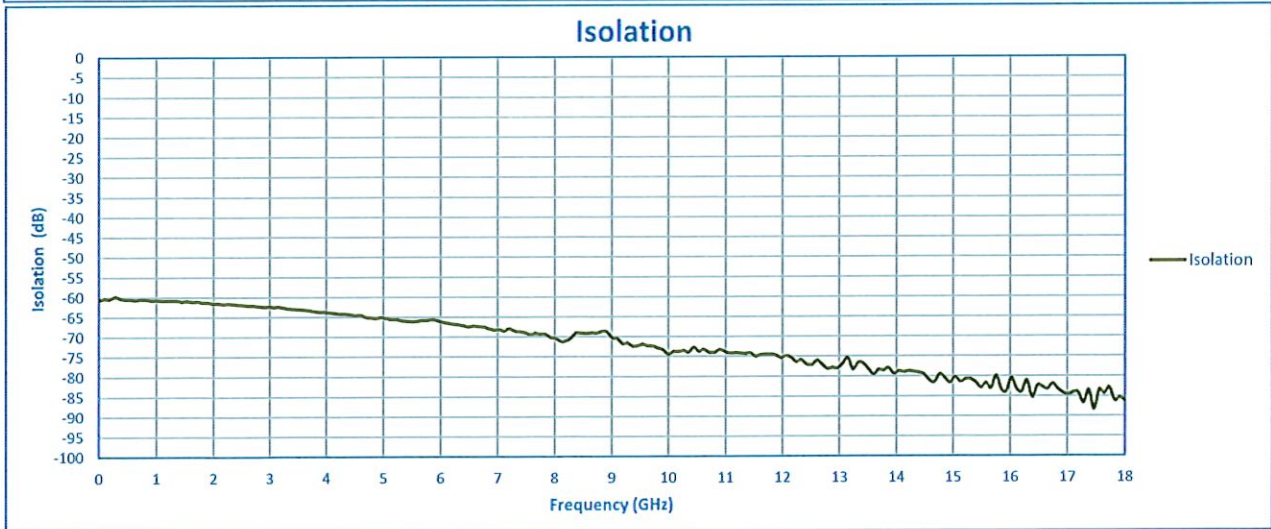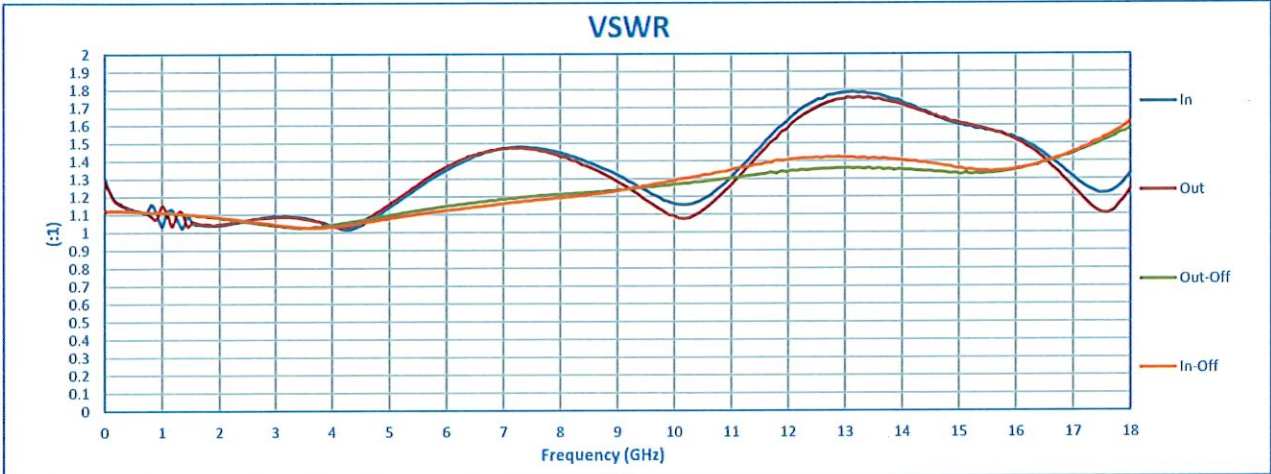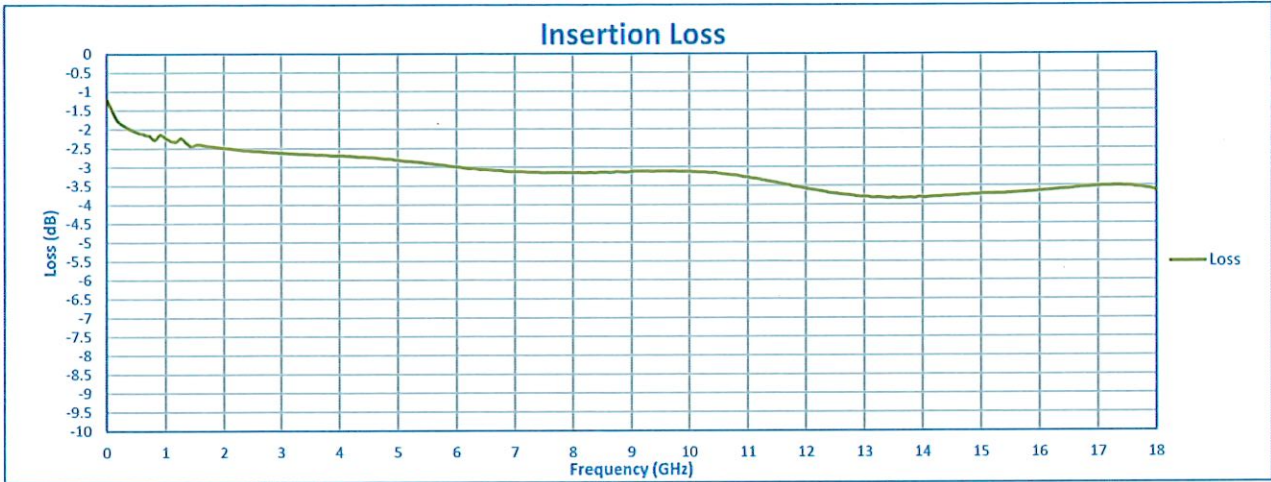


7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com

SUMMARY TEST ON P1T-DC18-60-T-SFF-HSLVT-LSC


Leakage Test Configuration

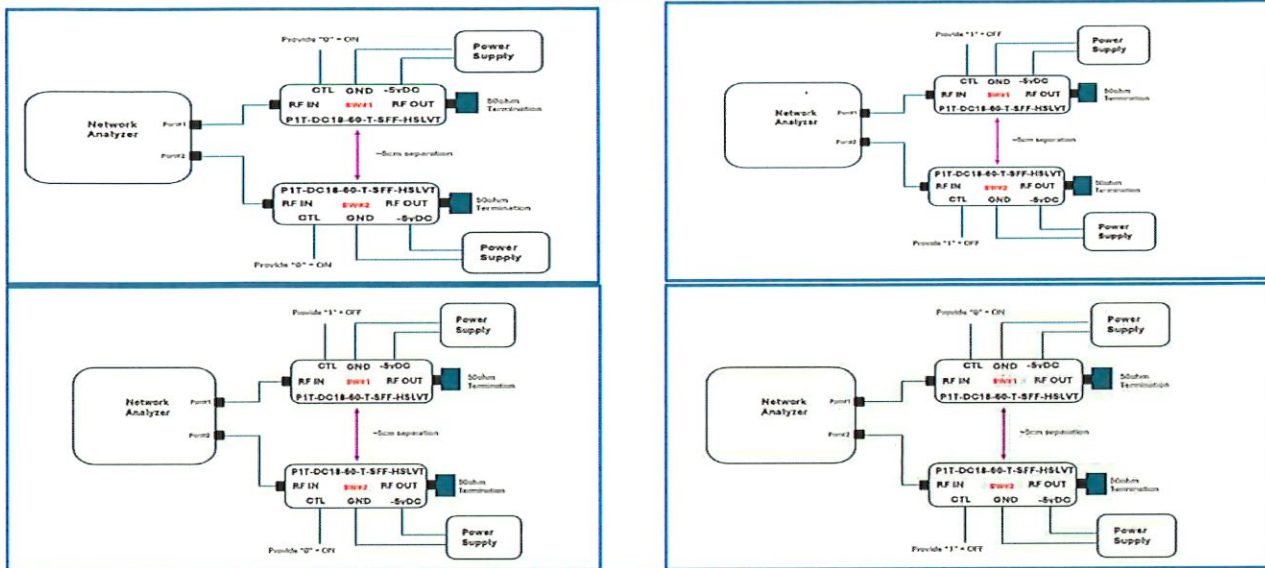

Leakage Test (Unit to Unit)

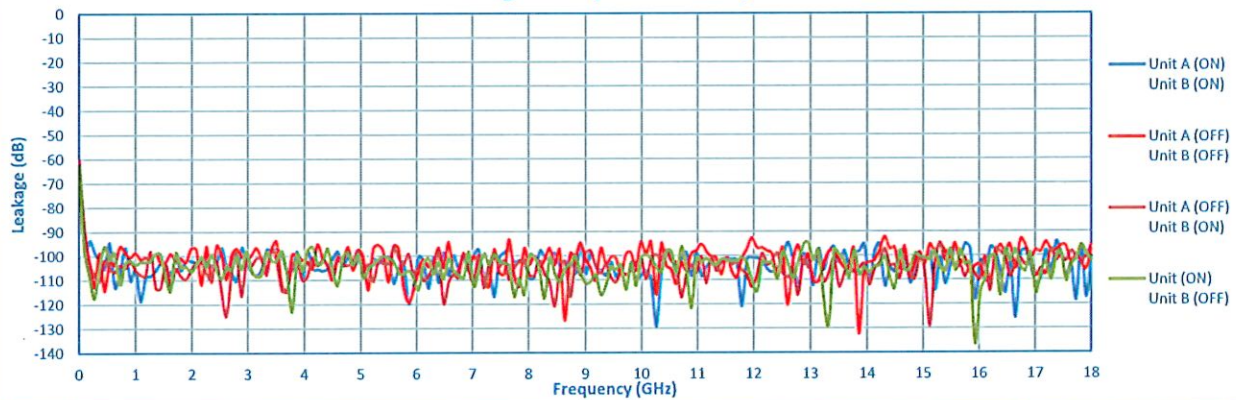

Leakage Test TTL Port

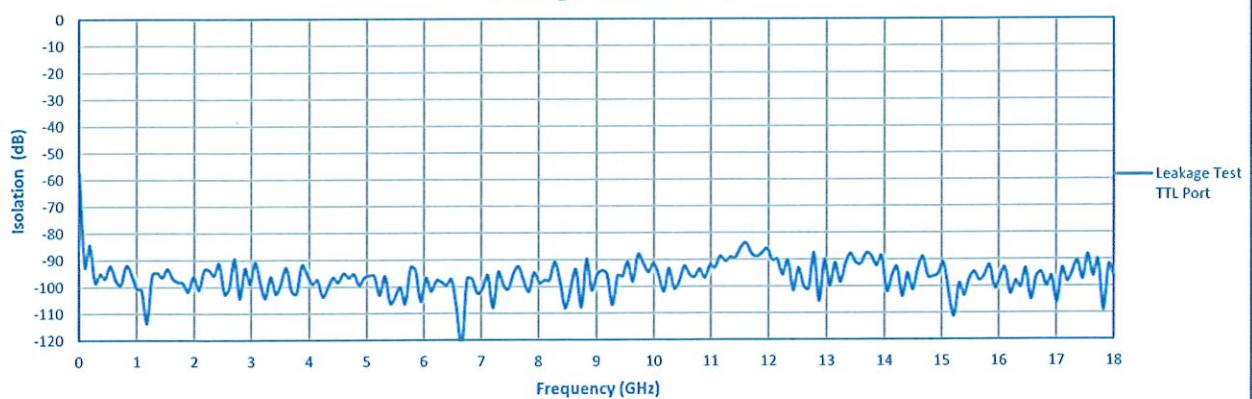


SUMMARY TEST ON P1T-DC18-60-T-SFF-HSLVT-LSC

Spectral Emissions During Switching (Spectrum Content)


Pulse Parameters

PW - 60 ns
PRI - 280 ns
Frequency - 3.57 MHz

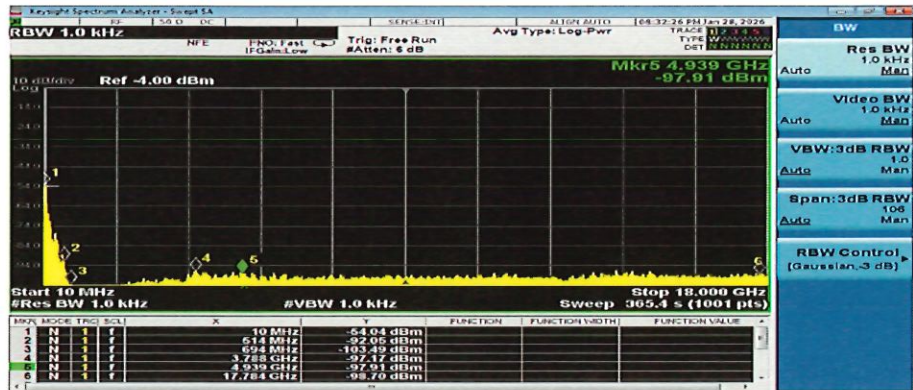


Pulse Parameters

PW - 100 ns
PRI - 280 ns
Frequency - 3.57 MHz

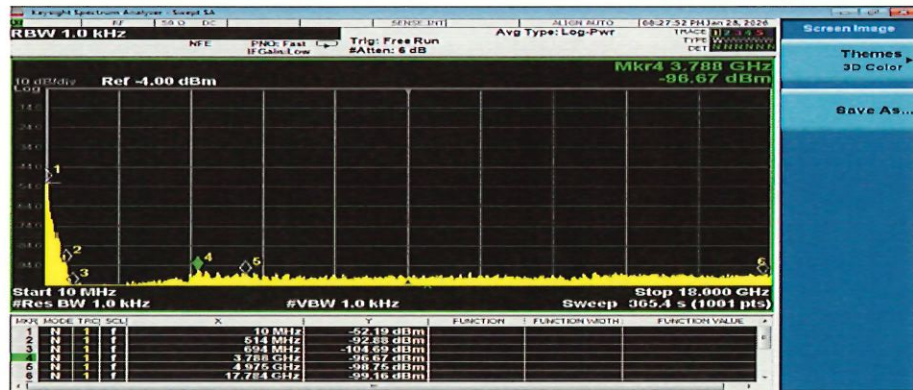


Pulse Parameters

PW - 50 ns
PRI - 700 ns
Frequency - 1.43 MHz

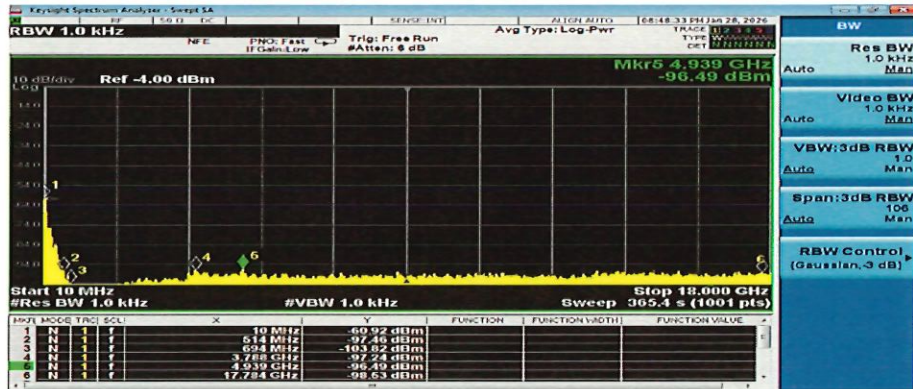

Pulse Parameters

PW - 300 ns
PRI - 700 ns
Frequency - 1.43 MHz

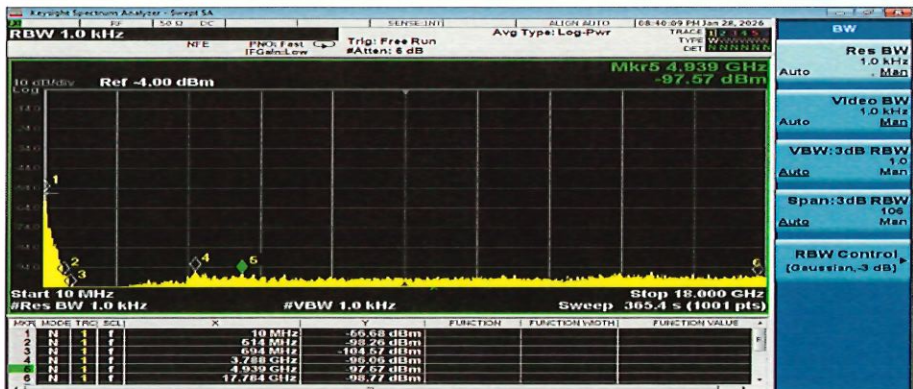

SUMMARY TEST ON P1T-DC18-60-T-SFF-HSLVT-LSC


Switching Speed

Pulse Parameters

PW - 60 ns
PRI - 280 ns

Frequency - 3.57 MHz

Rise time	4.82 ns
Fall time	3.82 ns
Speed ON	28.8 ns
Speed OFF	17.60 ns

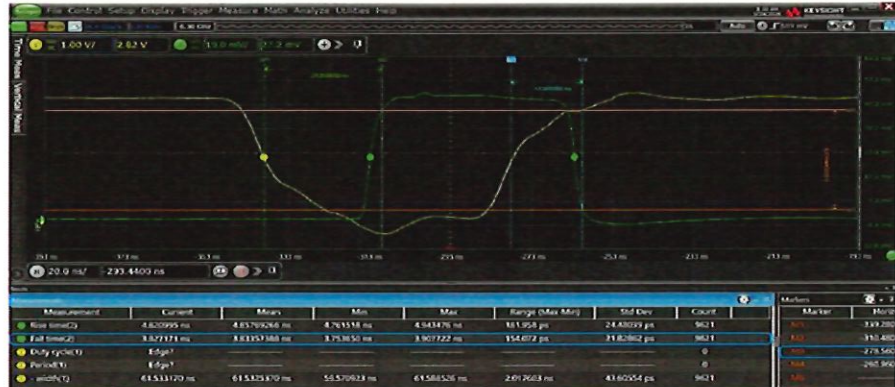

Pulse Parameters

PW - 100 ns
PRI - 280 ns

Frequency - 3.57 MHz

Rise time	4.24 ns
Fall time	3.43 ns
Speed ON	28.48 ns
Speed OFF	18.56 ns




Pulse Parameters

PW - 50 ns
PRI - 700 ns

Frequency - 1.43 MHz

Rise time	4.71 ns
Fall time	3.68 ns
Speed ON	27.36 ns
Speed OFF	17.60 ns

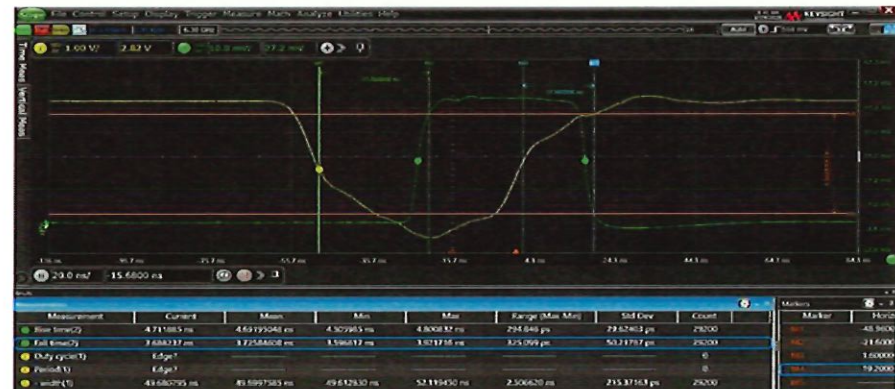


Pulse Parameters

PW - 300 ns
PRI - 700 ns

Frequency - 1.43 MHz

Rise time	4.16 ns
Fall time	3.44 ns
Speed ON	28.0 ns
Speed OFF	17.60 ns

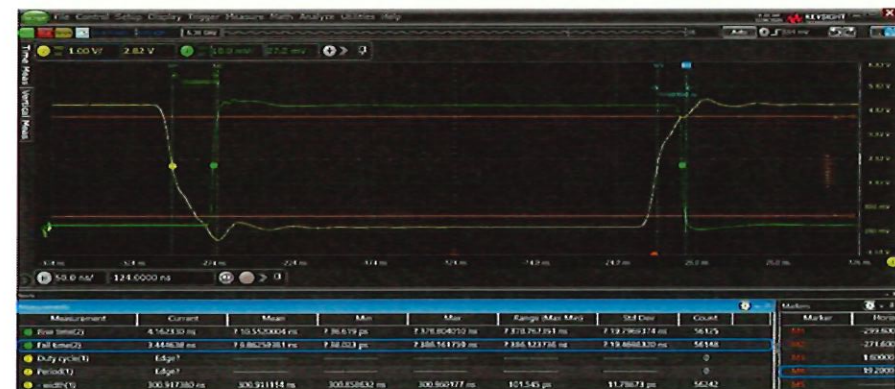

Yellow Trace - TTL
Green Trace - RF Signal

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com