

**SUMMARY TEST DATA**

**ON**

**P3T-250M40G-60-T-55-292FF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P3T-250M40G-60-T-55-292FF  
 Serial No: PL54119/2528

Tested By: K. Wagaman  
 Temperature: +25°C  
 Date: 7/10/2025  
 Drawing No: 27650940 REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC	
1	Frequency Range:	250 MHz to 40 GHz	250 MHz to 40 GHz	PMI QA2	
2	Insertion Loss:	7.0 dB Max.	4.55 dB		
3	VSWR Input/Output	2.0:1 Typ.	2.01:1 Max.		
4	Isolation:	60 dB Min.	71.08 dB		
5	Switching Speed	50 ns Typ. Rise/Fall Time: 15 ns Typ. Delay On/Off: 50 ns Typ.	See Typical Characteristics		
6	Input Power:	+25 dBm CW (Up to 18 GHz) Max. +23 dBm CW (18 to 40 GHz) Max. +20 dBm (Hot Switching)	See Typical Characteristics		
7	Control Signal:	TTL Logic (See Logic Table Below)	Pass		
8	DC Supply:	+5 V @ 200 mA Typ -5 V @ 100 mA Typ	+5 V @ 95 mA -5 V @ 19 mA		PMI QA2

CTL 1	CTL 0	J1-J2	J1-J3	J1-J4
0	0	ON	OFF	OFF
0	1	OFF	ON	OFF
1	0	OFF	OFF	ON
1	1	OFF	OFF	OFF

QA/QC Approval:  PMI QA2


Date: 7/11/2025

# SUMMARY TEST DATA


ON

P3T-250M40G-60-T-55-292FF

### Insertion Loss

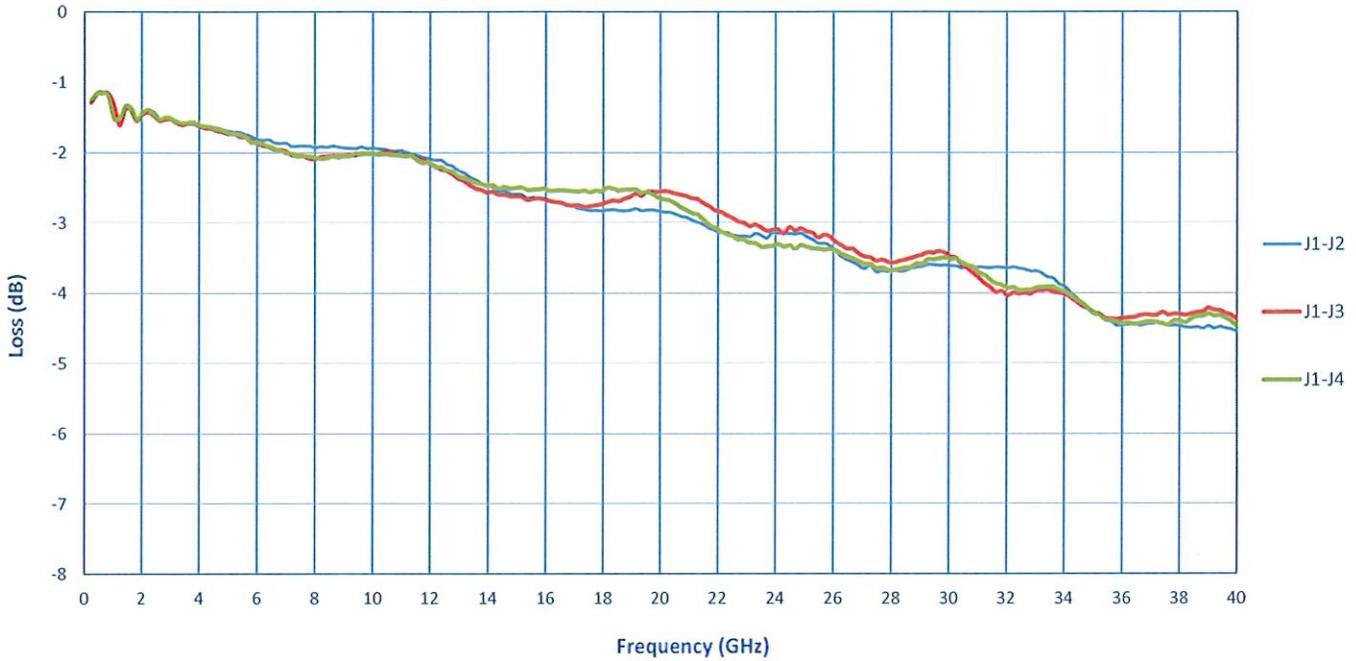

### Isolation

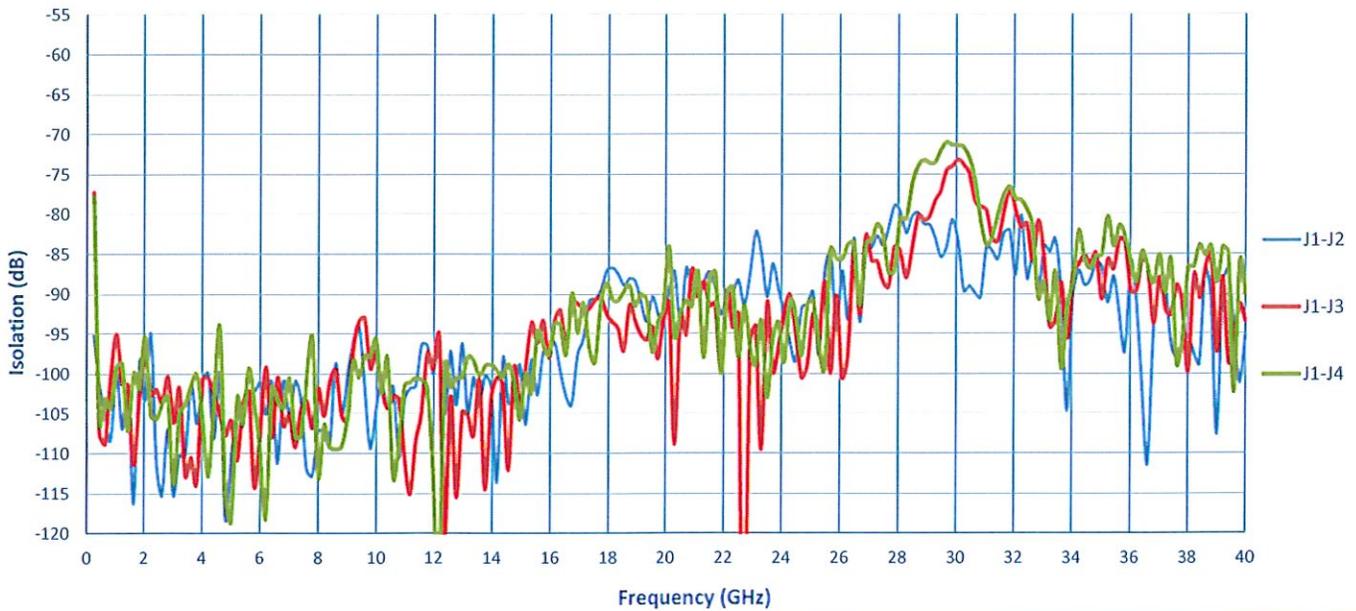

**SUMMARY TEST DATA**  
**ON**  
**P3T-250M40G-60-T-55-292FF**

