

**SUMMARY TEST
 ON
 PA-218-45-5-2W-24V-SFF**

Customer: _____
 SO No: _____
 Model No: PA-218-45-5-2W-24V-SFF
 Serial No: PL54222/2529



Tested By: A. Mousavi
 Temperature: +25° C
 Date: 7/15/2025
 Drawing No: 27645180 REV: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
			+25°C	
1	Frequency Range:	2.0 - 18.0 GHz	2.0 - 18.0 GHz	<div style="position: absolute; top: 10px; right: 10px; border: 1px solid black; padding: 2px;"> PA11 QA4 </div>
2	Gain:	42 dB Min. 56 dB Max.	51.28 dB Max. 48.5 dB Min. See Graph	
3	Gain Flatness:	±3.5 dB Max.	1.39 dB See Graph	
4	VSWR: (Input)	2.0:1 Max.	1.82 :1 See Graph	
5	VSWR: (Output)	2.4:1 Max.	2.24 :1 See Graph	
6	Noise Figure:	5.0 dB Max	4.02 dB See Graph	
7	PSAT:	2W Min. (33 dBm) @ 0 dBm Input Power Min	+38.48 dBm Max.	
			+35.24 dBm Min.	
			See Graph	
8	Maximum Input Power:	+20 dBm Max.	Pass	
9	DC Voltage Supply:	+24 VDC @ 800 mA Max. (No RF) @ 1.6 A Max. P _{sat}	+24 VDC @ 620 mA.(No RF) @ 1.5 A.(P _{sat})	<div style="position: absolute; top: 10px; right: 10px; border: 1px solid black; padding: 2px;"> PA11 QA4 </div>

QA/QC Approval: *Cummary Veliq*



Date: 7/18/25

SUMMARY TEST ON PA-218-45-5-2W-24V-SFF

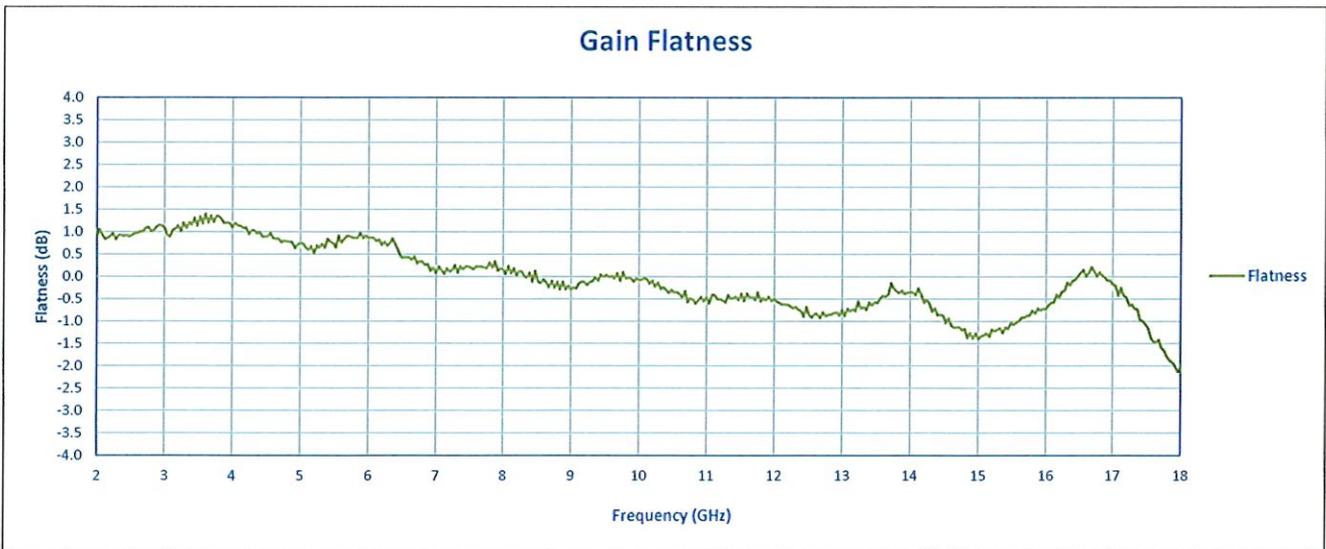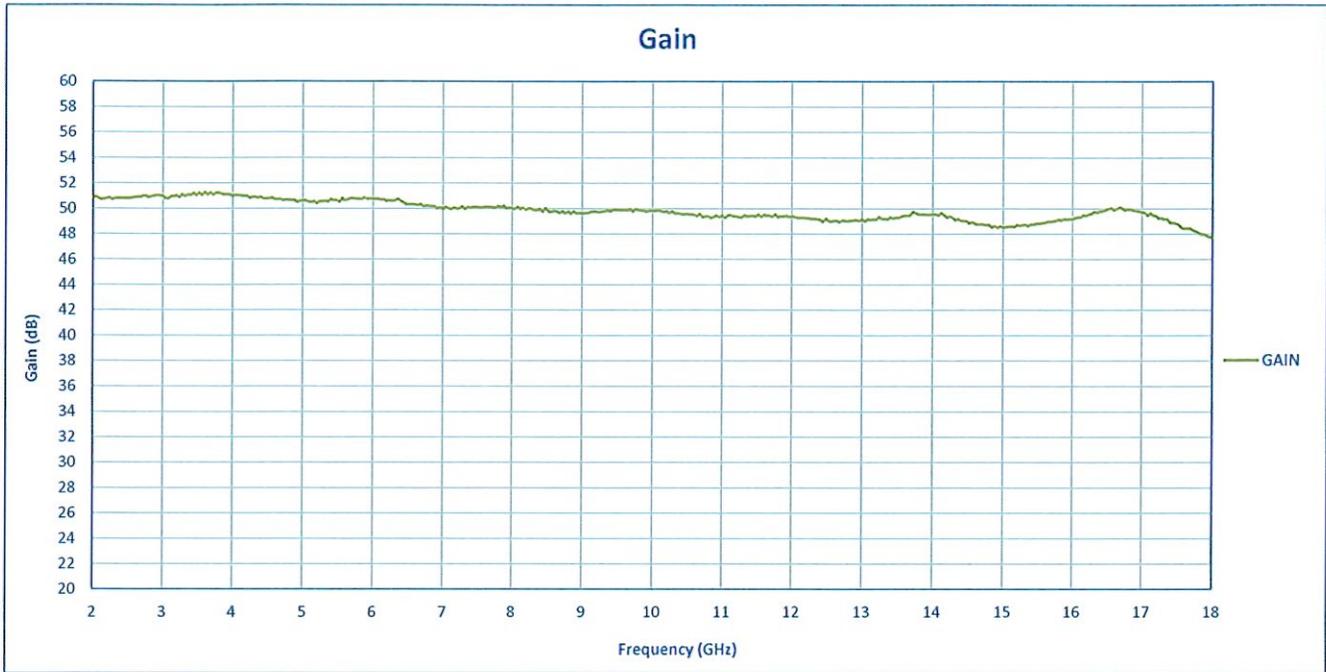

SUMMARY TEST

PA-218-45-5-2W-24V-SFF

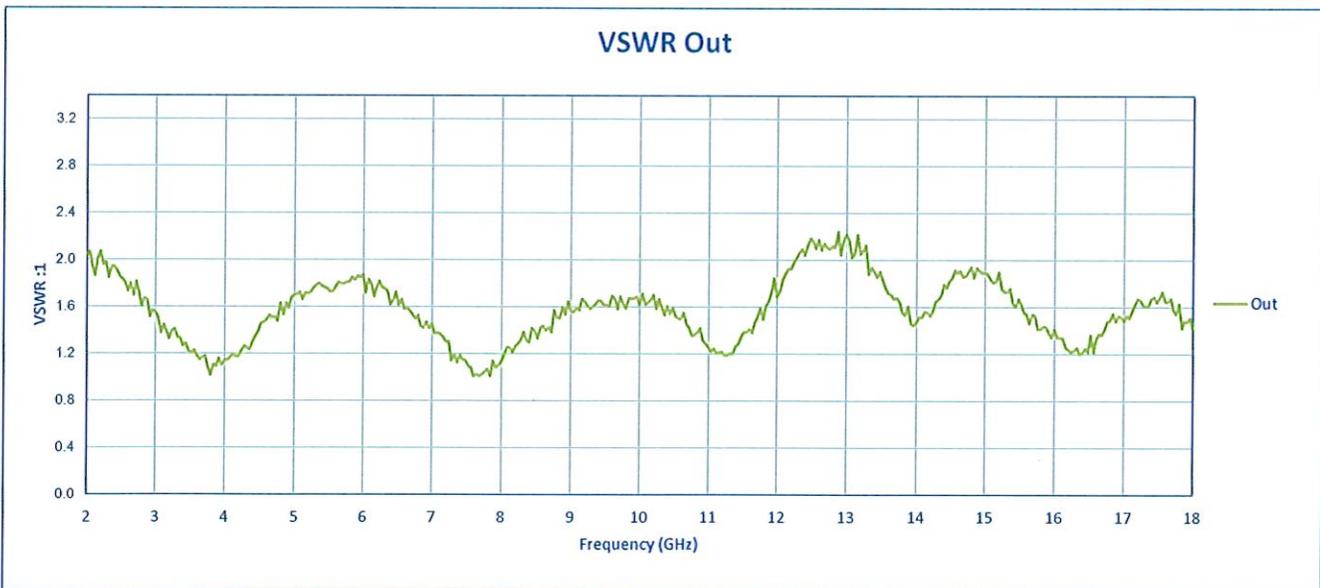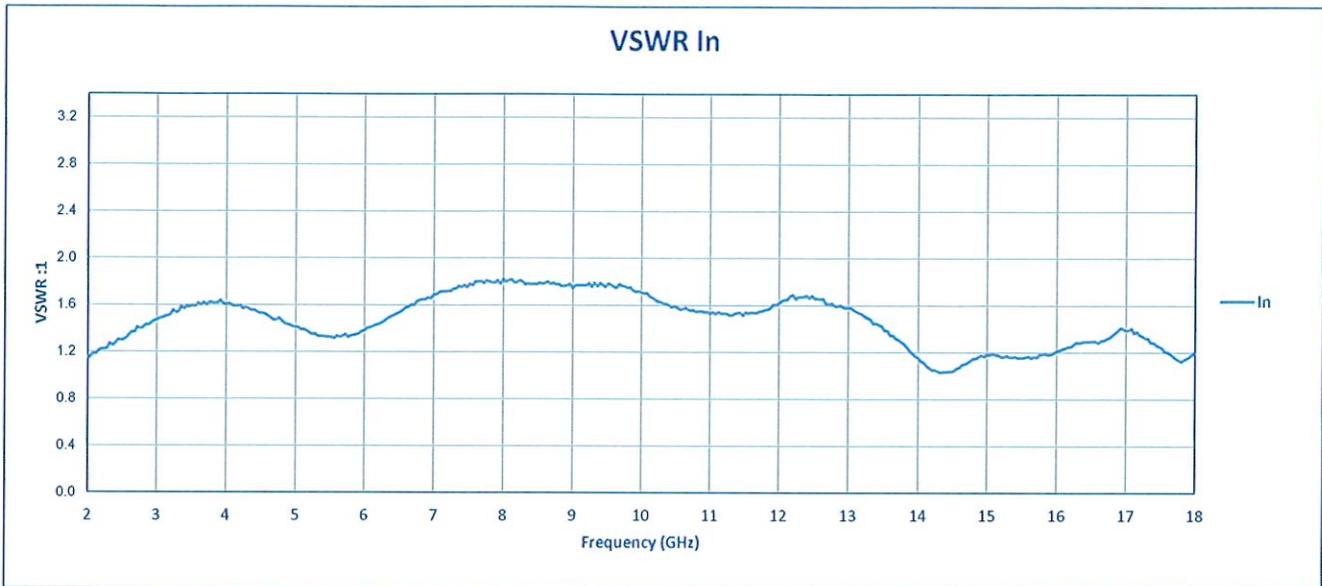

SUMMARY TEST ON PA-218-45-5-2W-24V-SFF

