

**SUMMARY TEST  
ON  
PA-218-45-5-2W-24V-SFF**

Customer: \_\_\_\_\_  
SO No: \_\_\_\_\_  
Model No: PA-218-45-5-2W-24V-SFF  
Serial No: PL54362/2529



Tested By: A. Mousavi  
Temperature: +25° C  
Date: 5/9/2026  
Drawing No: 27645180 REV: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	Test Results	QA
			+25° C	QC
1	Frequency Range:	2.0 - 18.0 GHz	2.0 - 18.0 GHz	PMI QA5
2	Gain:	42 dB Min. 56 dB Max.	51.91 dB Max. 48.53 dB Min. See Graph	PMI QA5
3	Gain Flatness:	±3.5 dB Max.	1.69 dB See Graph	
4	VSWR: (Input)	2.0:1 Max.	1.91 :1 See Graph	
5	VSWR: (Output)	2.4:1 Max.	2.08 :1 See Graph	
6	Noise Figure:	5.0 dB Max	4.81 dB See Graph	
7	PSAT:	2W Min. (33 dBm ) @ 0 dBm Input Power Min	+38.87 dBm Max.	
			+35.69 dBm Min.	
			See Graph	
8	Maximum Input Power:	+20 dBm Max.	Pass	
9	DC Voltage Supply:	+24 VDC @ 800 mA Max. (No RF) @ 1.6 A Max. P <sub>sat</sub>	+24 VDC @ 730 mA.(No RF) @ 1.5 A.(P <sub>sat</sub> )	PMI QA5

QA/QC Approval: *Jordan Pyzd*



Date: 5-12-26

# SUMMARY TEST ON PA-218-45-5-2W-24V-SFF

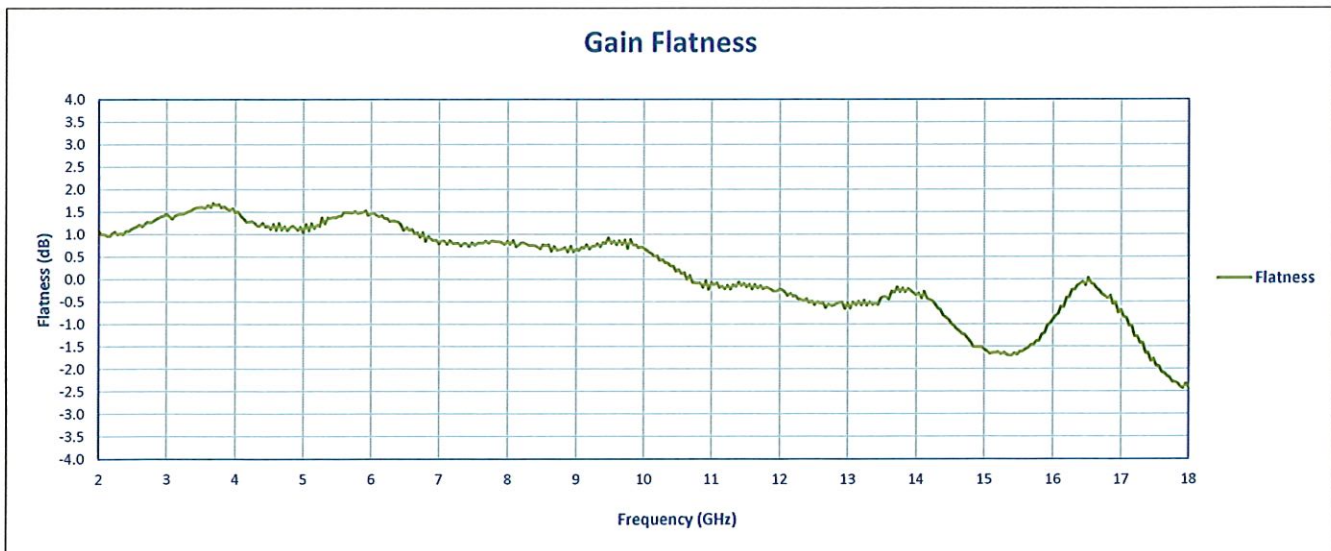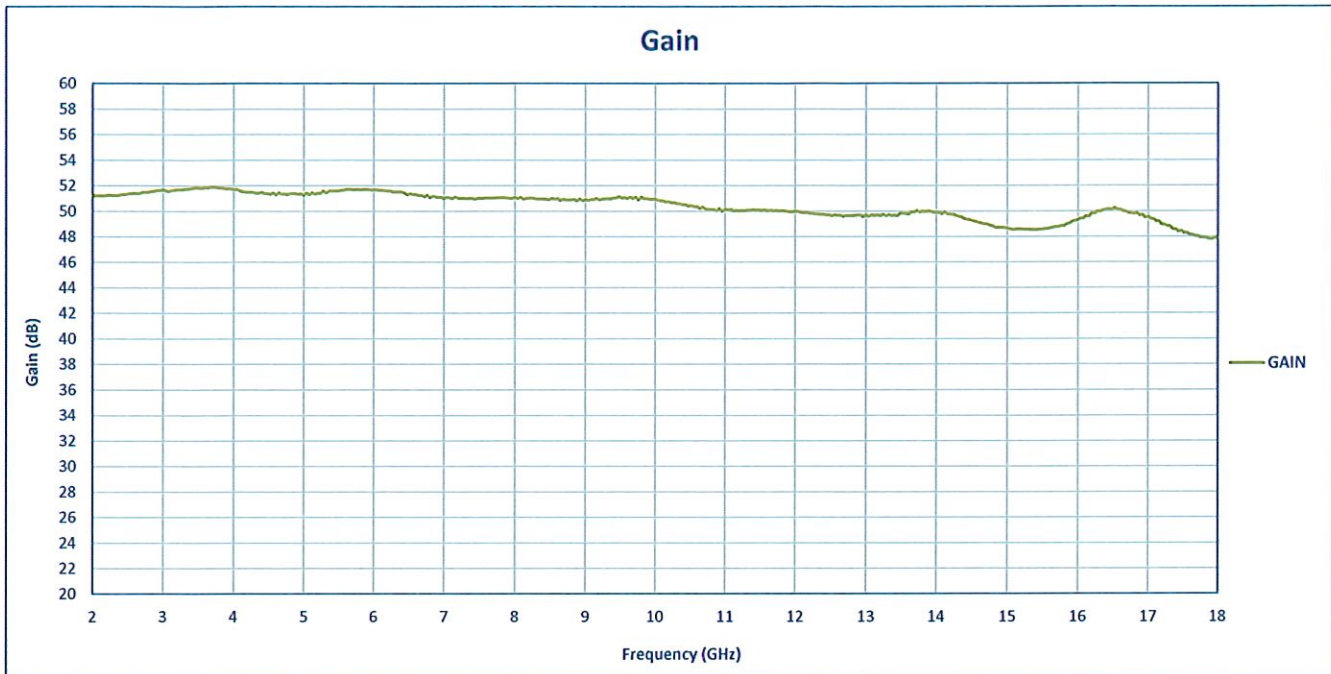

## SUMMARY TEST

### PA-218-45-5-2W-24V-SFF

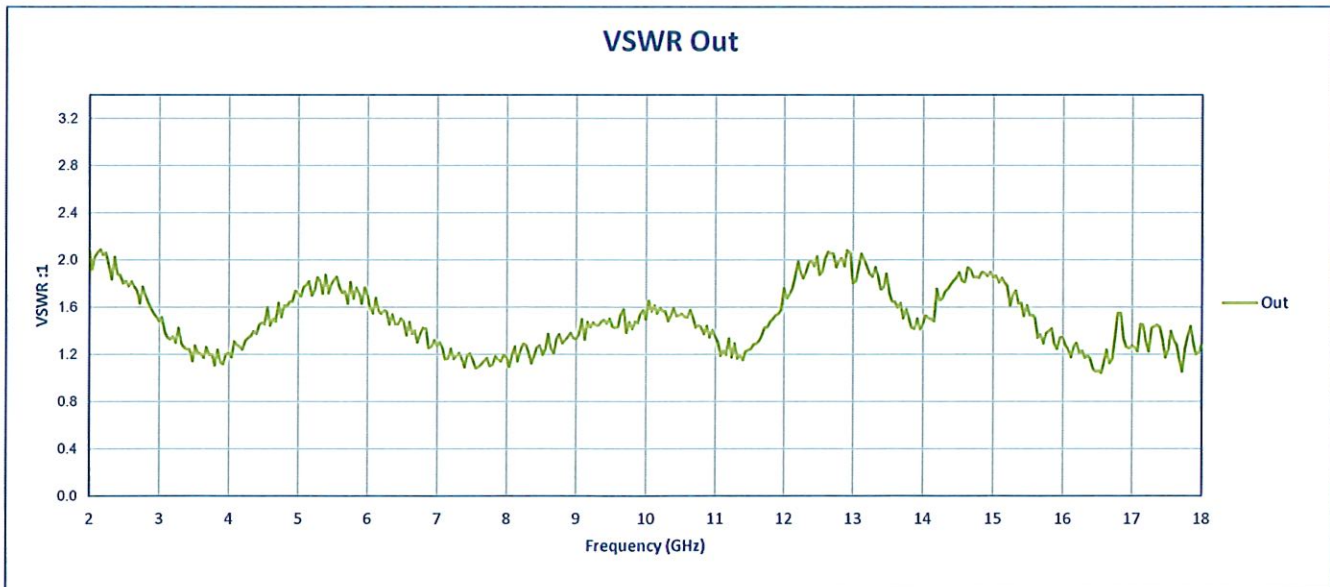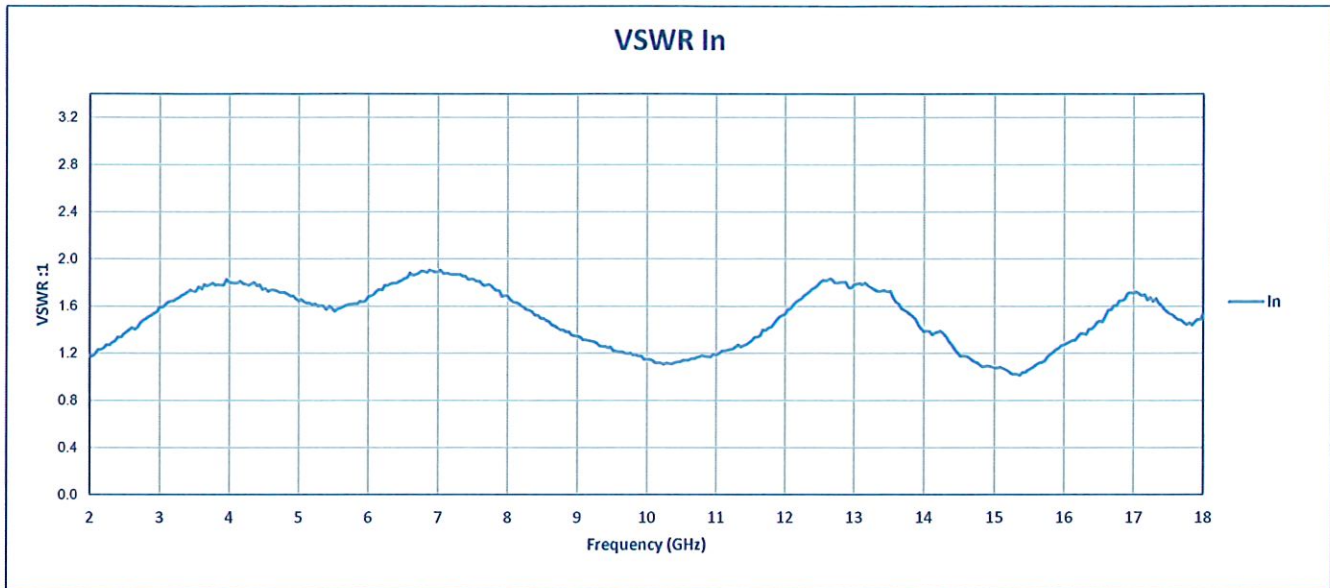

## SUMMARY TEST ON PA-218-45-5-2W-24V-SFF

