



**SUMMARY TEST DATA
ON
P2T-2G4G-75-T-SFF-PN**

Customer: _____
 SO No: _____
 Model No: P2T-2G4G-75-T-SFF-PN
 Serial No: PL55137/2536




Tested By: K Craven
 Temperature: 25°C
 Date: 8/28/2025
 Drawing No: 27616808 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	2 GHz to 4 GHz	2 GHz to 4 GHz	PMI QA4
2	Insertion Loss	1.2 dB Max.	1.18 dB	
3	Isolation	75 dB Min.	100.3 dB	
4	VSWR: In/Out	1.6 dB Max.	1.5:1 In 1.53:1 Out	
5	Switching Speed	100 ns Max.	Pass See Typical Characteristics	
6	Operating Power	1 Watts CW Max	Pass See Typical Characteristics	
7	Power Supply	5 V @ 80 mA -15 V @ 50 mA	5 V @ 30 mA -15 V @ 60 mA	PMI QA4

QA/QC Approval: *Cameron Kelly*

Date: 8/29/25

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@quanticpmi.com

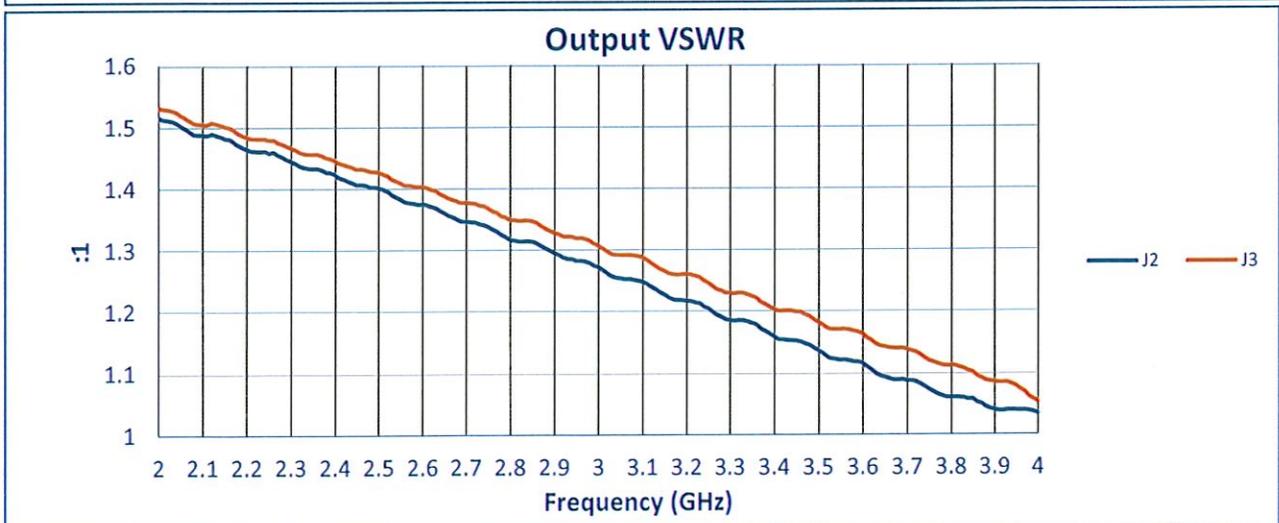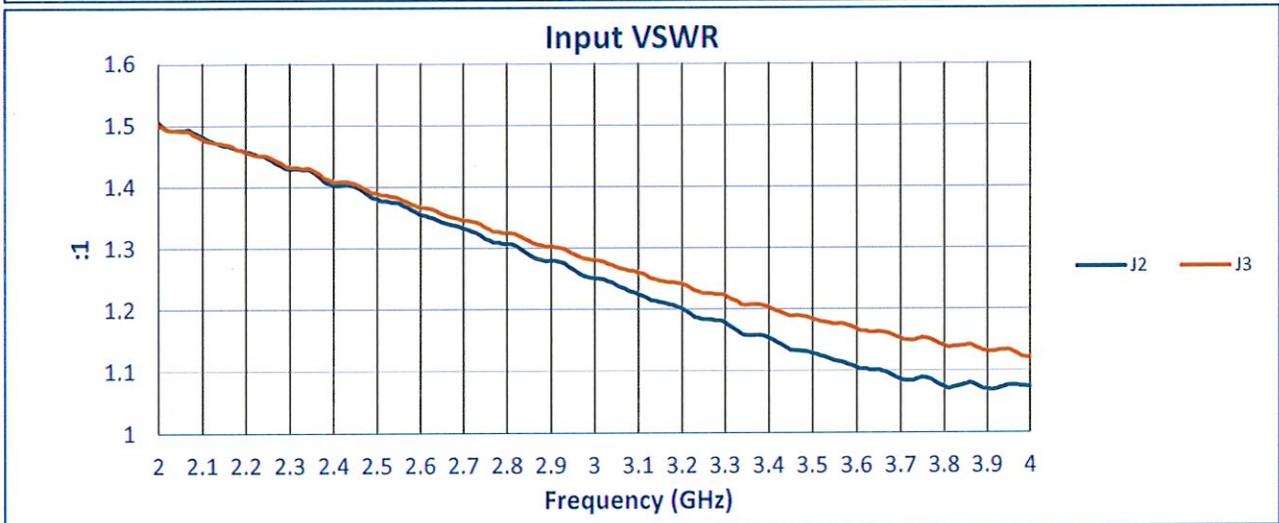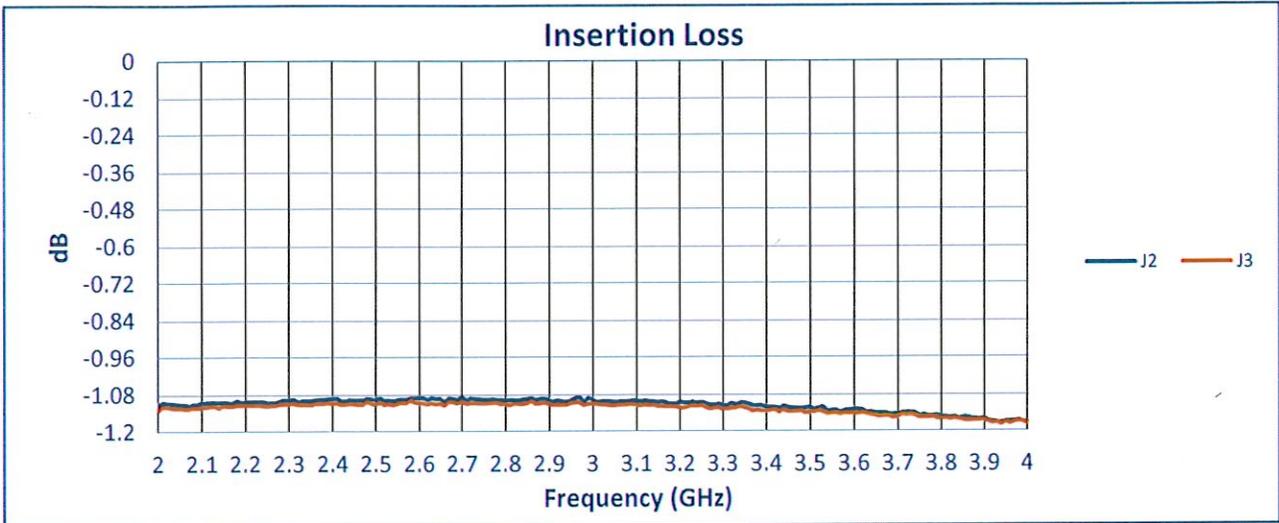

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@quanticpmi.com

