



SUMMARY TEST DATA
ON
LM-0R5G2G-RAD-3W-23DBM-SMF

RECERTIFIED

[Handwritten Signature]
 4/17/2025

Customer: _____
 SO No: _____
 Model No: LM-0R5G2G-RAD-3W-23DBM-SMF
 Serial No: PL56240/2636

Tested By: K Craven
 Temperature: +25°C
 Date: 9/4/2025
 Drawing No: 27646440 REV: A2



TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	0.5 GHz to 2 GHz	0.5 GHz to 2 GHz	PMI QA5
2	Insertion Loss:	0.9 dB Max.	0.46 dB See Graph	<i>[Vertical Line]</i> PMI QA5
3	VSWR:	1.5:1 Max.	1.35:1 In 1.4:1 Out See Graph	
4	Leakage Power:	200 mW (+23 dBm) Typ.	+ 15.45 dBm See Graph	
5	Power Handling:	3W CW Max. 1 kW Max. 0.1% DC 1 us PW	Pass See Typical Characteristics	
6	Recovery Time:	200 ns Max.	Pass See Typical Characteristics	

QA/QC Approval: *[Handwritten Signature]*

Date: 9/18/25

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
 Email: sales@pmi-rf.com

**SUMMARY TEST DATA
ON
LM-0R5G2G-RAD-3W-23DBM-SMF**

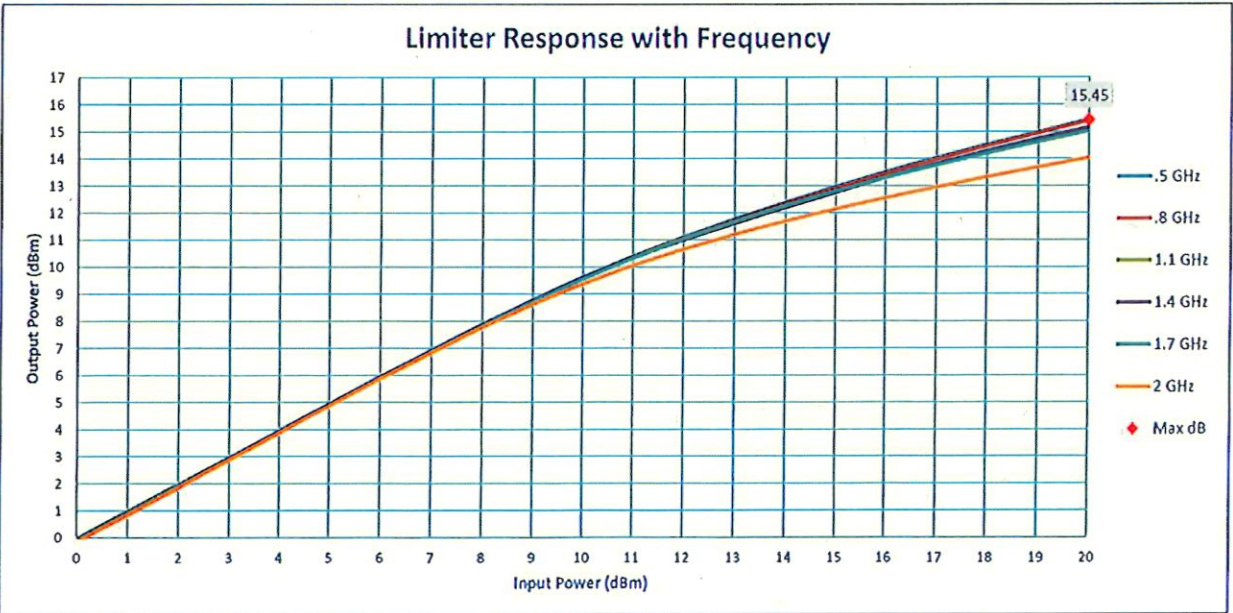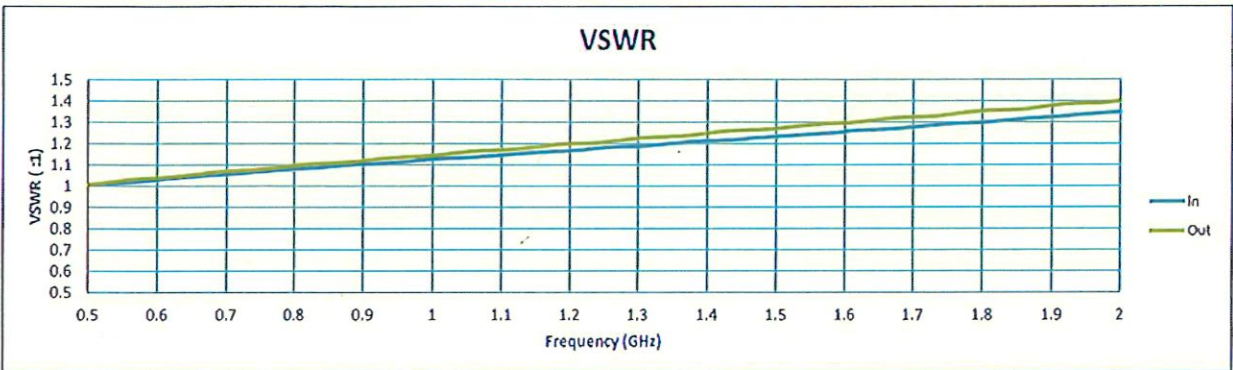

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@pml-rf.com