

**SUMMARY TEST DATA
ON
LM-0R5G2G-RAD-3W-23DBM-SMF**

Customer: _____
SO No: _____
Model No: LM-0R5G2G-RAD-3W-23DBM-SMF
Serial No: PL55380/2538

Tested By: K Craven
Temperature: +25°C
Date: 9/16/2025
Drawing No: 27646440 REV:

REV: A2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	0.5 GHz to 2 GHz	0.5 GHz to 2 GHz	PMI QA4
2	Insertion Loss:	0.9 dB Max.	0.44 dB See Graph	
3	VSWR:	1.5:1 Max.	1.38:1 In 1.44:1 Out See Graph	
4	Leakage Power:	200 mW (+23 dBm) Typ.	+ 15.45 dBm See Graph	
5	Power Handling:	3W CW Max. 1 kW Max. 0.1% DC 1 us PW	Pass See Typical Characteristics	
6	Recovery Time:	200 ns Max.	Pass See Typical Characteristics	PMI QA4

QA/QC Approval:

Carmen K. Kling

Date:


9/17/25

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@pmi-rf.com


SUMMARY TEST DATA ON LM-0R5G2G-RAD-3W-23DBM-SMF

PL55380/2538

Insertion Loss

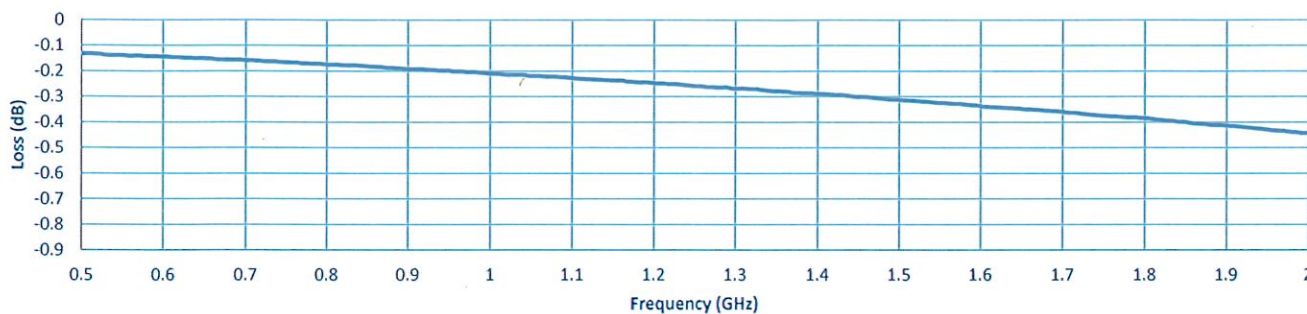

VSWR

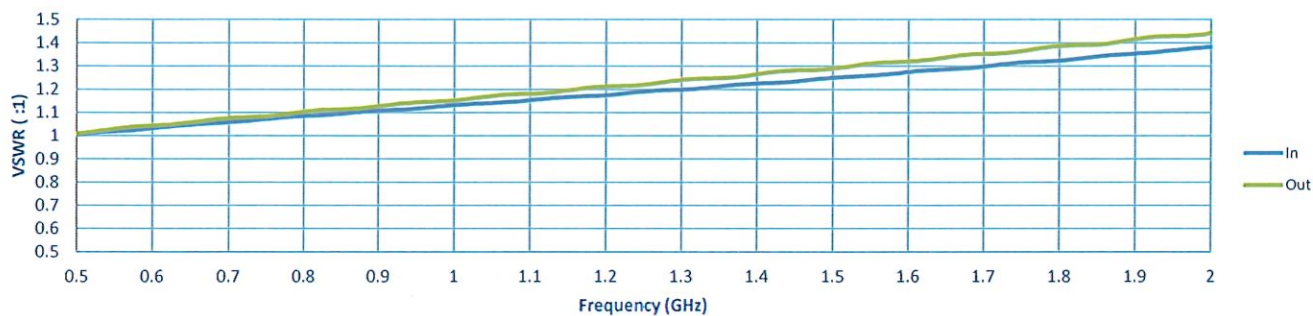

Limiter Response with Frequency

