

**SUMMARY TEST DATA
ON
PDC-2G18G-10C-SFF-50W**




CUSTOMER: _____
SO: _____
MODEL NO: PDC-2G18G-10C-SFF-50W
SERIAL NO: PL55902/2542

TESTED BY: K. Mansfield
TEMPERATURE: +25°C
DATE: 10/16/2025
DRAWING NO: 27650160 REV: A1




TEST ITEM NO:	PARAMETERS	SPECIFIED VALUE @ 25°C	MEASURED VALUE	QA/QC
1	Frequency Range	2 GHz To 18 GHz	2 GHz To 18 GHz	PMI QA5
2	Insertion Loss	0.7 dB Max Excluding Coupling Loss: 0.46 dB	0.4 dB	PMI QA5
3	Coupling Factor	10 ±0.7 dB Max	10 dB	
4	Coupling Sensitivity	±0.7 dB Max	±0.36 dB	
5	Directivity	15 dB Min	20.2 dB Min	
6	VSWR	Primary 1.40:1 Max Secondary 1.40:1 Max	1.22:1 Primary 1.26:1 Secondary	

QA/QC Approval: *Jordan* Date: 10-29-25

**SUMMARY TEST DATA
ON
PDC-2G18G-10C-SFF-50W**

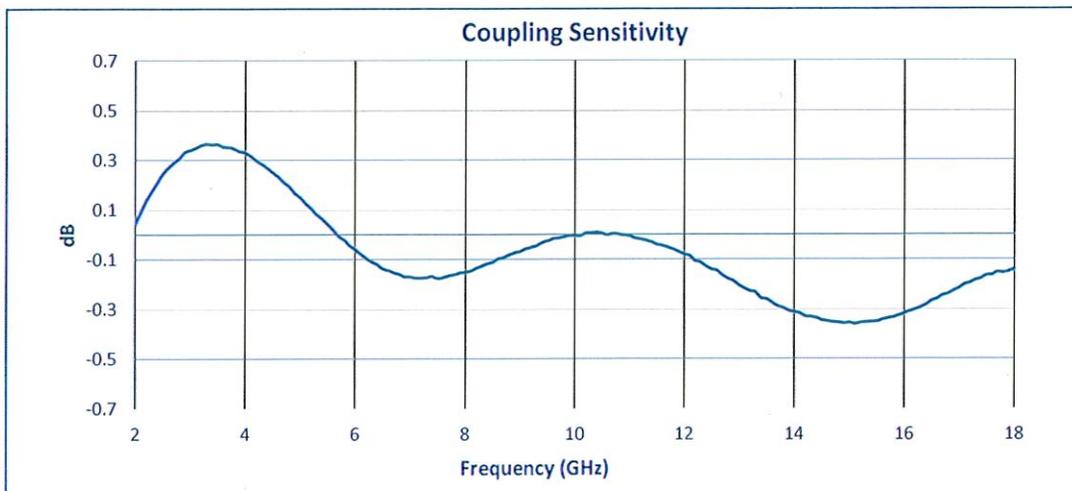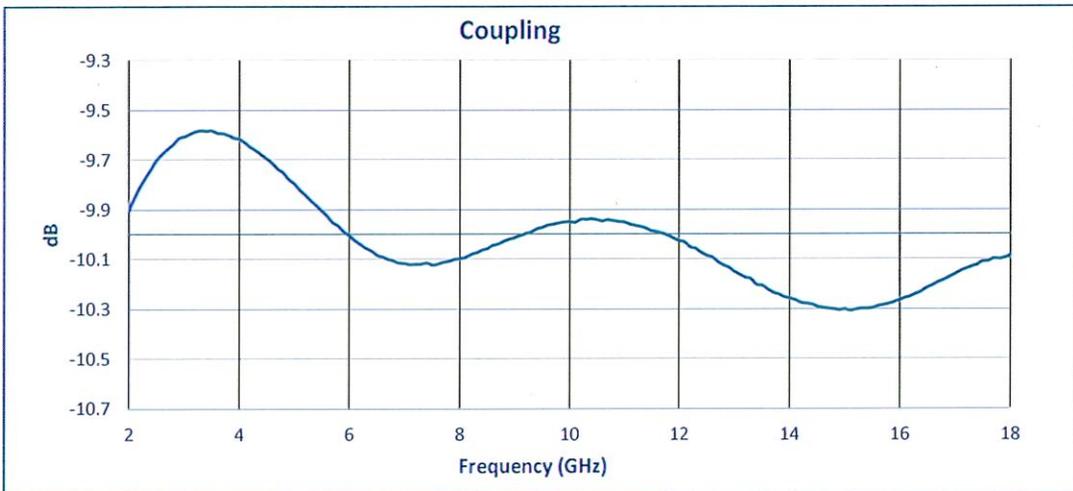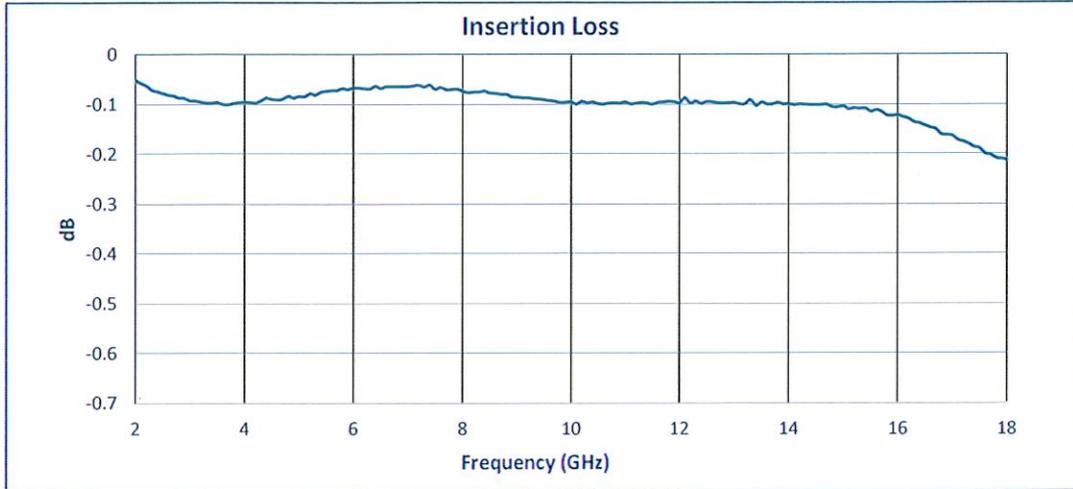

**SUMMARY TEST DATA
ON
PDC-2G18G-10C-SFF-50W**

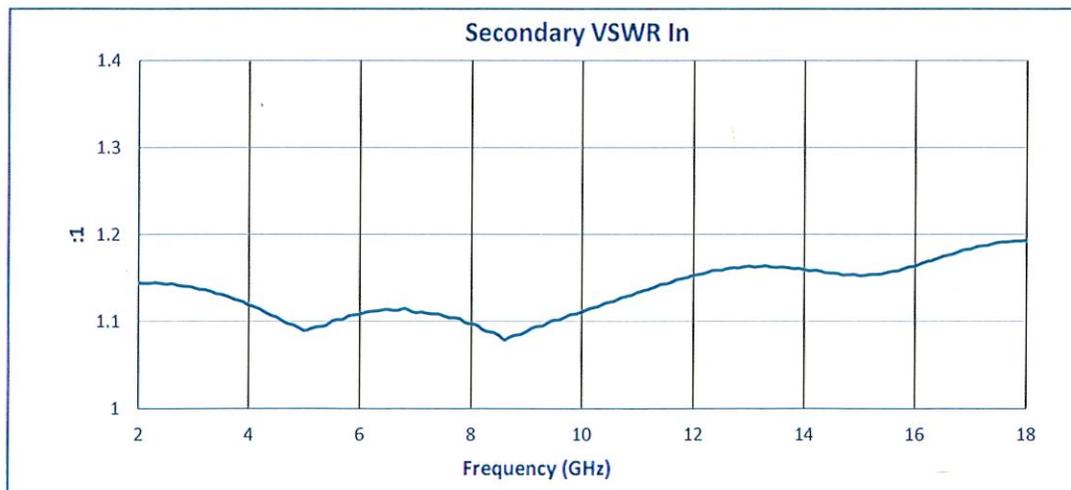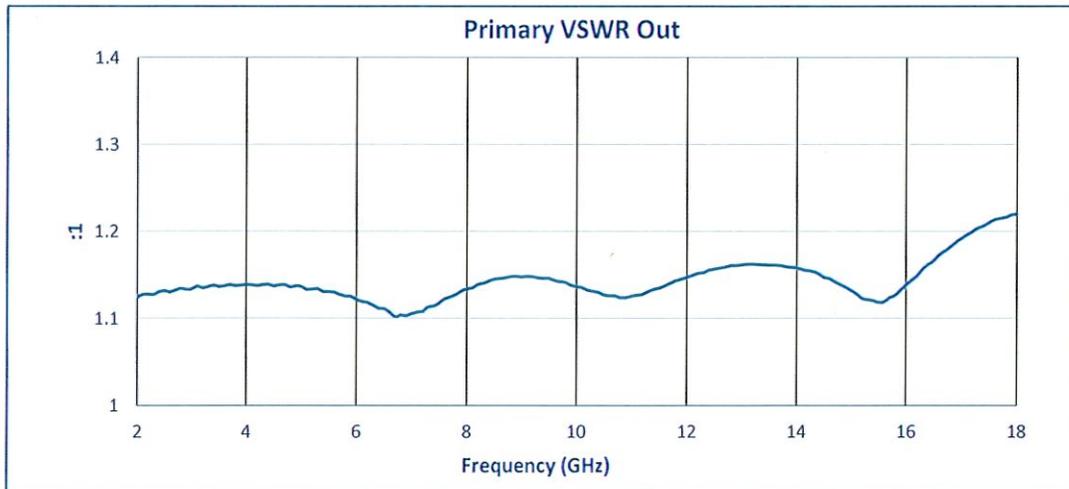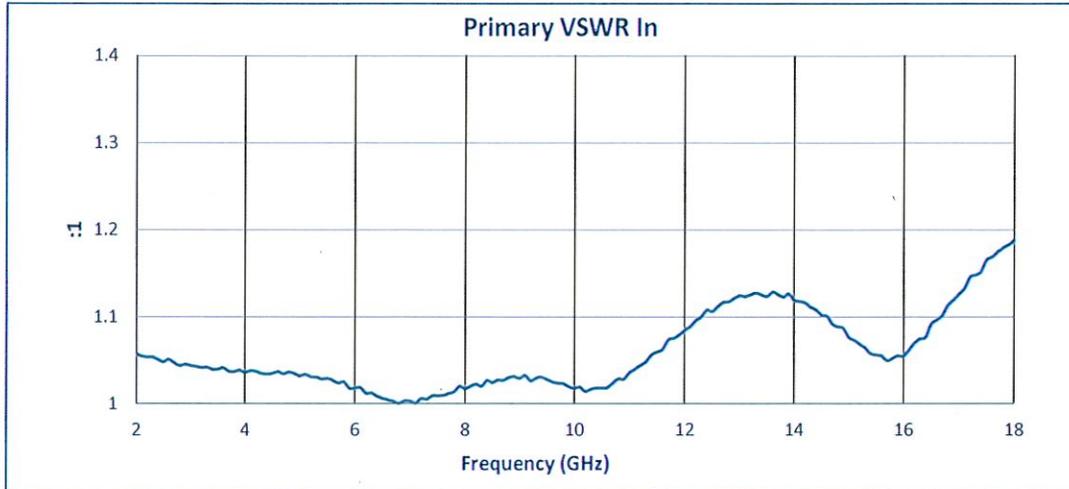

SUMMARY TEST DATA
ON
PDC-2G18G-10C-SFF-50W

