



**SUMMARY TEST DATA
ON
PLDRO-6500-13DBM-SFF**



Customer: _____
 SO No: _____
 Model No: PLDRO-6500-13DBM-SFF
 Serial No: PL56208/2545

Tested By: K Craven
 Temperature: 25°C
 Date: 11/12/2025
 Drawing No: 27643440 Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Output Frequency	6500 MHz	6500 MHz	PMI QA/QC
2	Output Level	13 dBm MIN.	19 dBm	
3	Spurious	-75 dBc MAX.	-87 dBc	
4	Harmonics	-20 dBc MAX.	-33.6 dBc	
5	Phase Noise	-135 dBc/Hz MAX. @ 1 MHz	-143 dBc/Hz @ 1 MHz	
6	DC Supply Voltage	12V @ 300 mA MAX.	12V @ 240 mA	
7	Lock Detector	TTL HIGH In Lock	Pass	PMI QA/QC

QA/QC Approval: *Carmen Kelly* Date: 11/17/2025

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
 Email: sales@quanticpmi.com

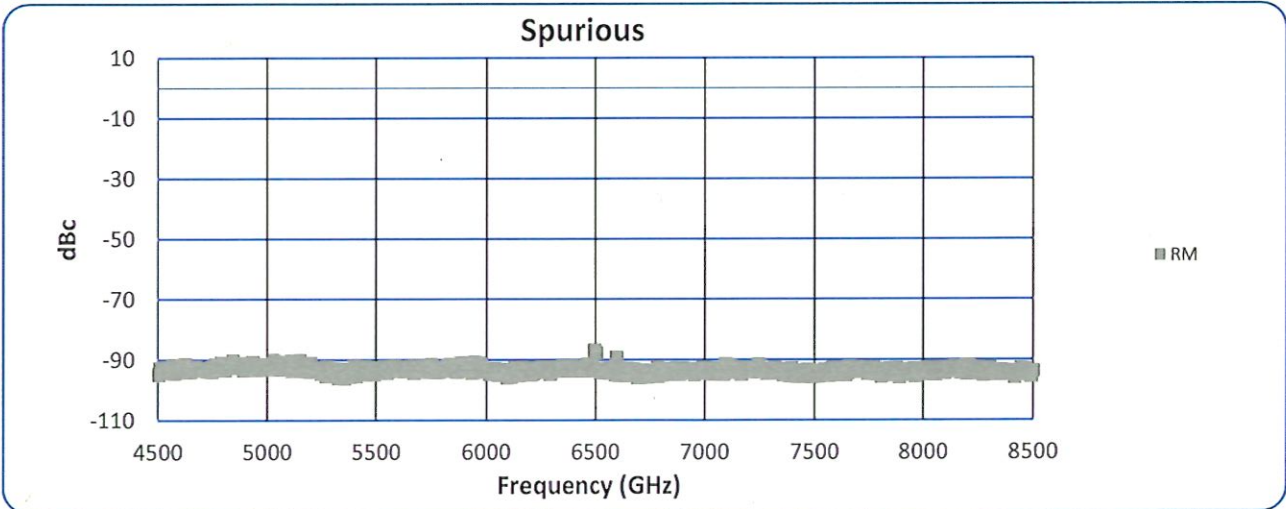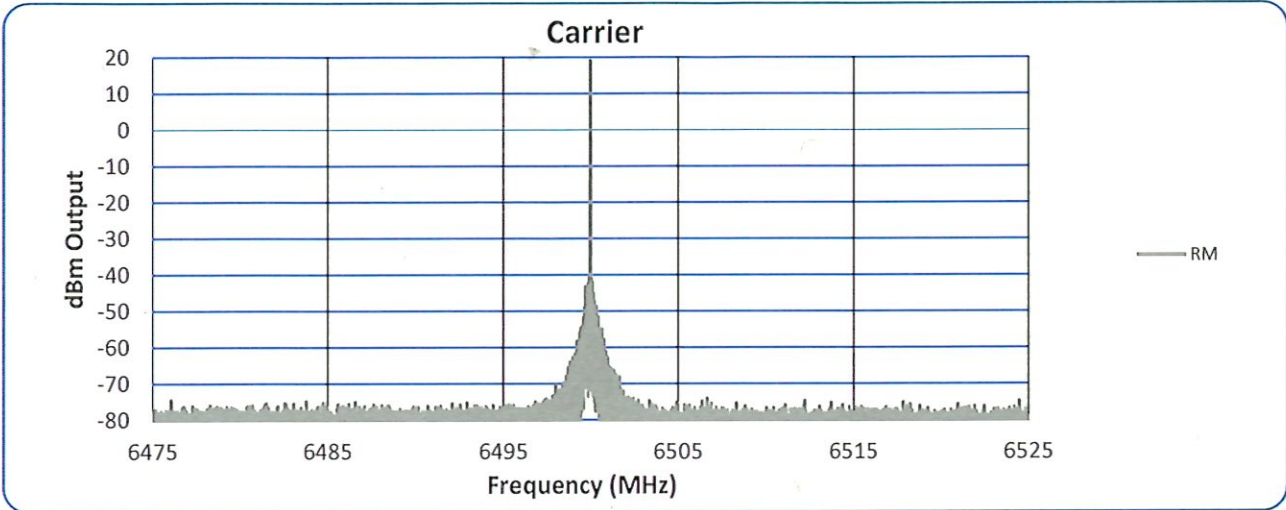

Phase Noise Curve

Settings		Residual Noise [T1 w/o spurs]		Phase Detector +20 dB	
Signal Frequency:	6.500001 GHz	Int PHN (30.0 .. 30.0 M)	-66.5 dBc		
Signal Level:	11.1 dBm	Residual PM	38.119 m°		
Cross Corr Mode	Harmonic 1	Residual FM	8.767 kHz		
Internal Ref Tuned	Internal Phase Det	RMS Jitter	0.0163 ps		

