



**SUMMARY TEST DATA  
ON  
APD-2-0D82D2-SFF-30W**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: APD-2-0D82D2-SFF-30W  
 Serial No: PL56743/2548

Tested By: K Craven  
 Temperature: +25 C  
 Date: 11/24/2025  
 Drawing No: 27644900 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range	0.8 to 2.2 GHz	0.8 to 2.2 GHz	PMI QA2
2	Insertion Loss	0.5 dB MAX (Above 3.01 dB Split)	0.3 dB (See Plot)	
3	Isolation	22 dB MIN.	25.7 dB (See Plot)	
4	VSWR	INPUT 1.20:1 MAX. OUTPUT 1.15:1 MAX.	INPUT 1.13:1 OUTPUT 1.1:1 (See Plot)	
5	Amplitude Balance	±0.1 dB MAX	0.01 dB MAX. 0 dB MIN. (See Plot)	
6	Phase Balance	±2° MAX	0° MAX. -0.18° MIN. (See Plot)	PMI QA2



\* FOR ALL OTHER SPECIFICATIONS PLEASE SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE  
 Note: Amplitude and phase balance are relative to J1 Port.

QA/QC Approval:   PMI QA2

Date: 11/26/2025





# SUMMARY TEST DATA ON APD-2-0D82D2-SFF-30W

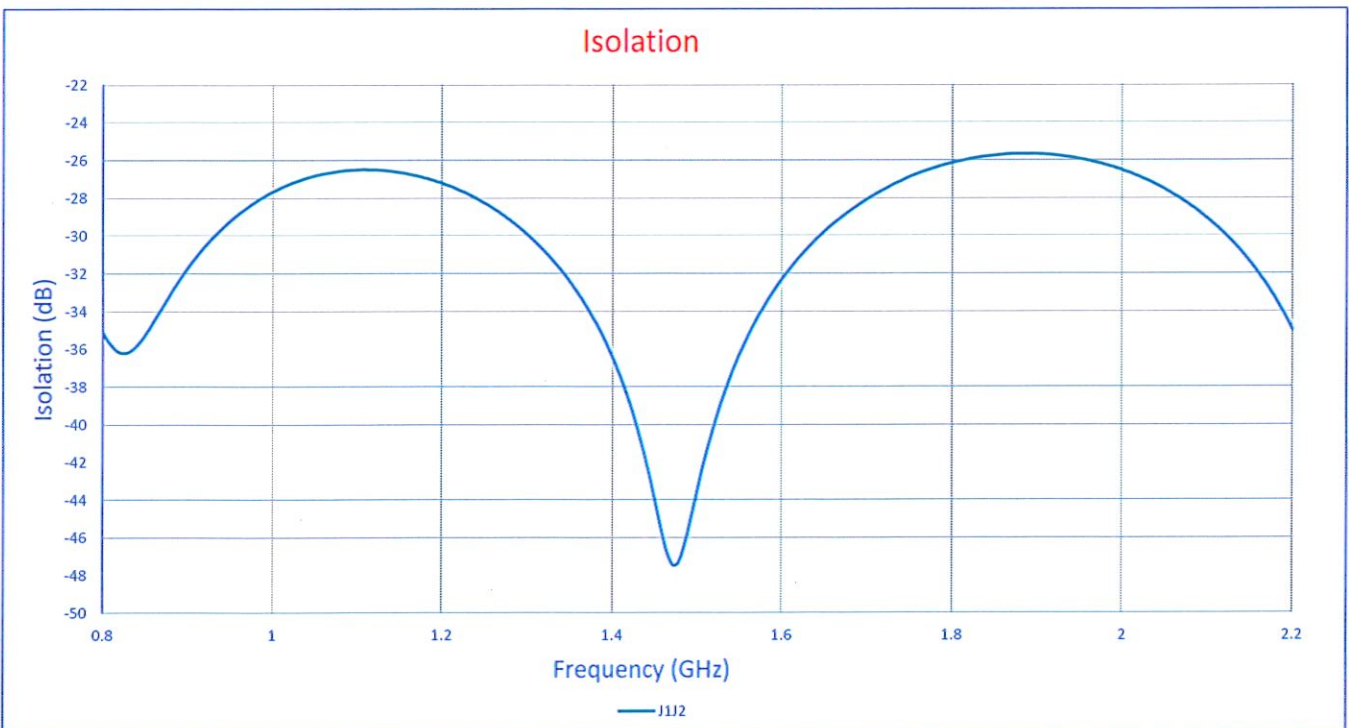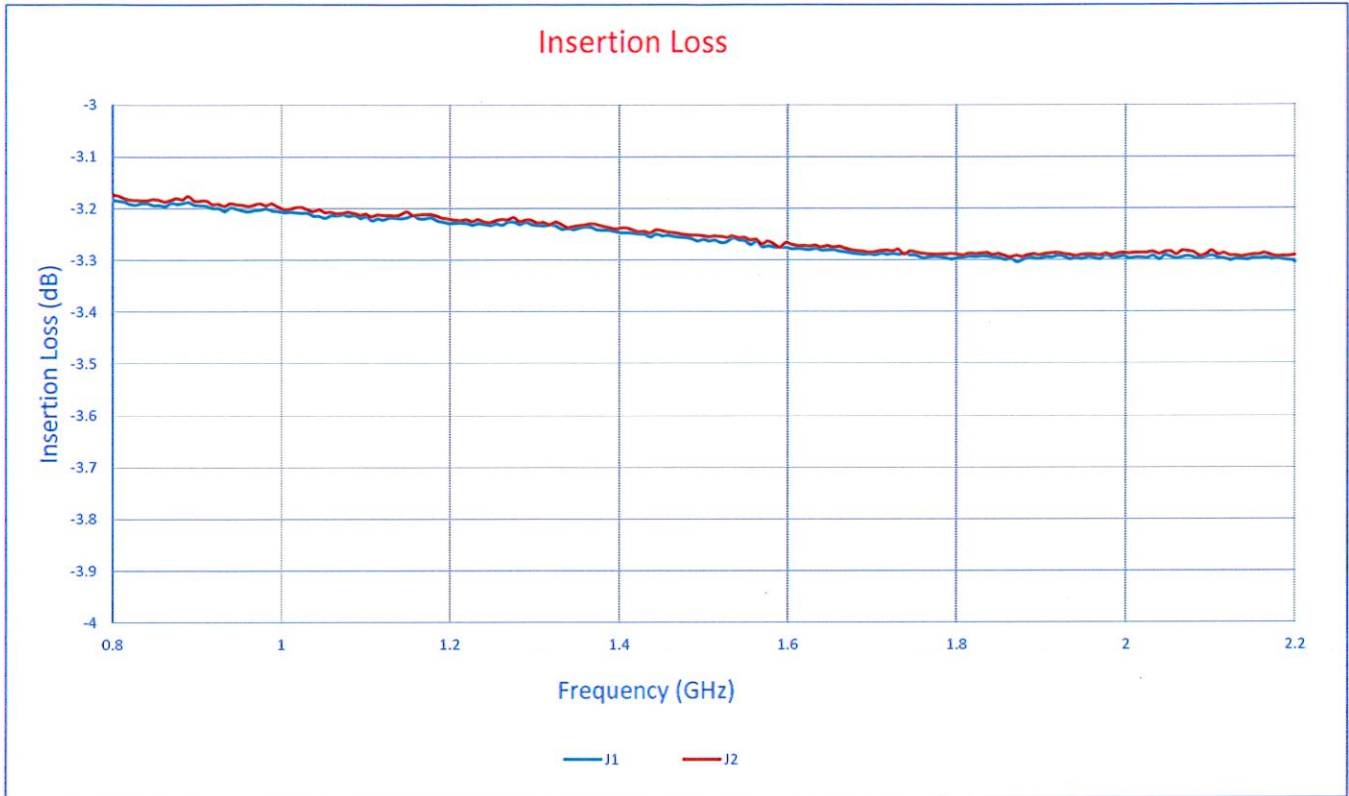



# SUMMARY TEST DATA ON APD-2-0D82D2-SFF-30W

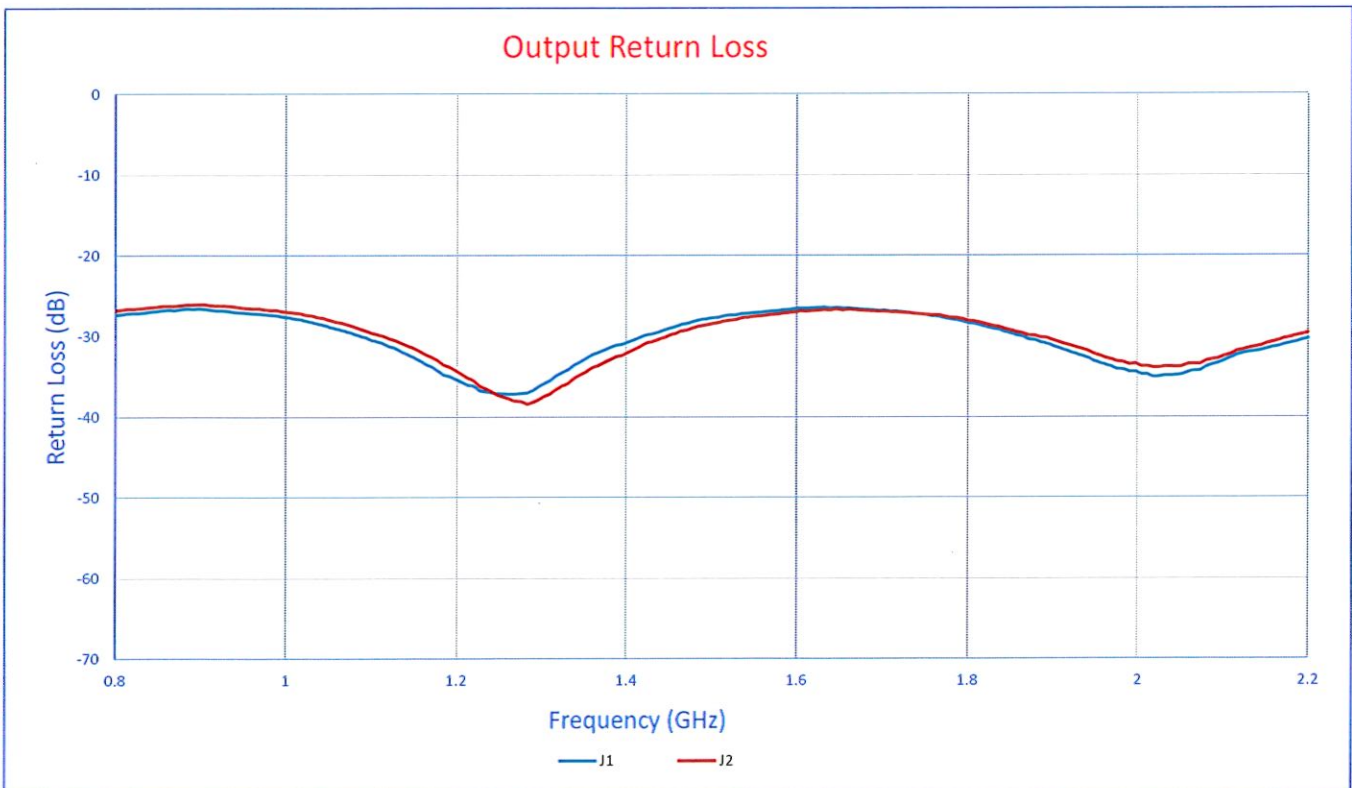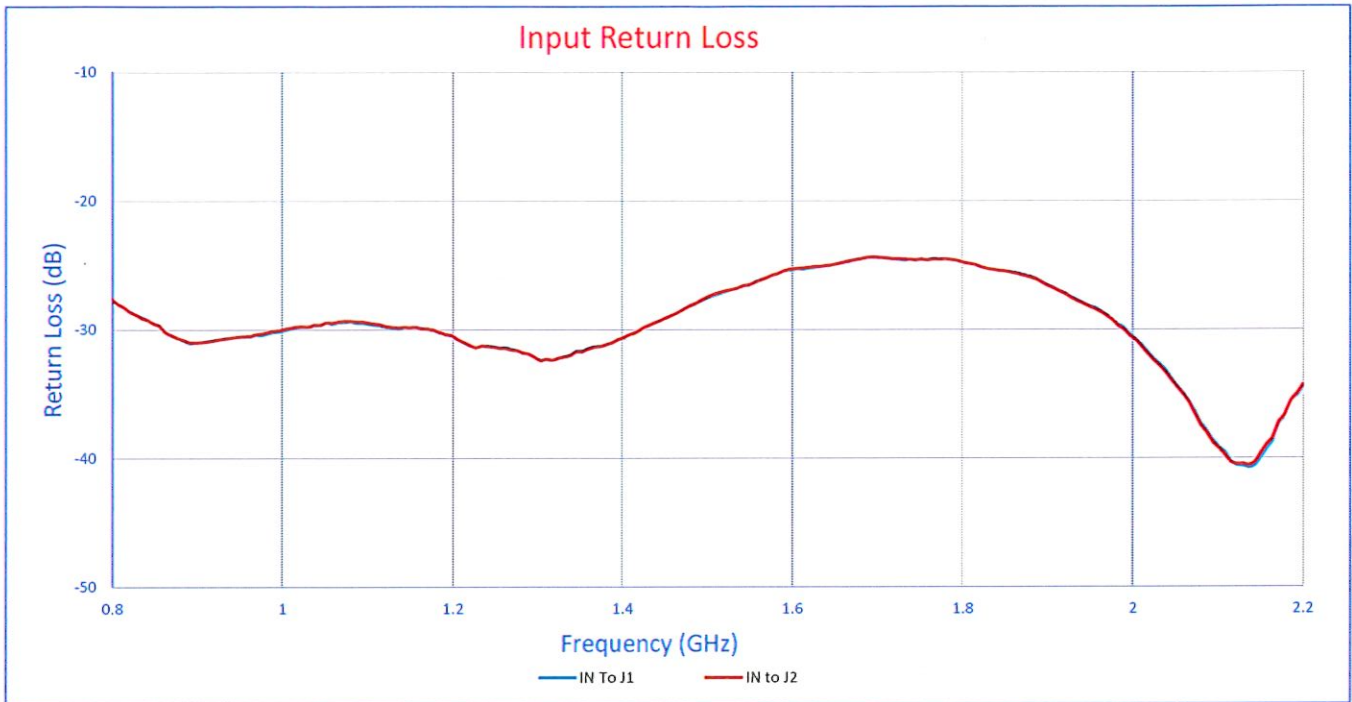



# SUMMARY TEST DATA ON APD-2-0D82D2-SFF-30W

