



Planar Monolithics Industries, Inc.
 7311-F Grove Rd.
 Frederick, MD 21704
 Ph: (301) 662-5019 Fax: (301) 662-1731
www.pmi-rf.com

**SUMMARY TEST DATA
 ON
 DETECTOR LOG VIDEO AMPLIFIER**

CUSTOMER: _____
MODEL NO: SDLVA-0120-70-CONDOR
OPTION NO: _____
SERIAL NO: PL5744

JOB NO: SO09000054
TESTED BY: D. DURBIN
TEMPERATURE: +25°C
DATE: 7/29/09

TEST ITEM NO:	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	FREQUENCY RANGE	750 MHz TO 1250 MHz	750 MHz TO 1250 MHz	
2	CENTER FREQUENCY	1 GHz	1 GHz	
3	INPUT LOGGING RANGE	-60dBm TO +5 dBm (MIN)	SEE PLOTS	
4	LOG VIDEO OUTPUT	20mV/dB (MIN) 30 mV /dB (MAX)	23.1 mV / dB 25.7 mV / dB	
5	LOG VIDEO DC OFFSET	100mV NOMINAL (ADJUSTABLE ± 50%)	Pass	
6	LOG VIDEO LINEARITY BEST FIT STRAIGHT LINE (-60 dBm to +5 dBm)	± 2.5 dB (MAX) @ ROOM TEMPERATURE	± 0.51 dB	
7	LIMITED OUTPUT	-6 dBm(NOM), ±2.0 dB (MAX) @ ROOM	-4.88 dBm -7.19 dBm	
8	LIMITED OUTPUT FLATNESS	± 1.75 dB (MAX) @ ROOM	± 1.16 dB	
9	SETTLING TIME	40 nS MAX (TO WITHIN 1 dB)	Pass (See Typical Speed Characteristics)	No Overshoot
10	RISE TIME	25 nS MAX	Pass (See Typical Speed Characteristics)	



Planar Monolithics Industries, Inc.
7311-F Grove Rd.
Frederick, MD 21704
Ph: (301) 662-5019 Fax: (301) 662-1731
www.pmi-rf.com

11	FALL TIME	30 nS MAX	Pass (See Typical Speed Characteristics)	
12	VSWR (+25°C) - INPUT	1.8:1 (MAX)	1.2 : 1	
13	VSWR (+25°C) - OUTPUT	2.5:1 (MAX)	2.4 : 1	
14	DC POWER +9V TO +18 V	200 mA (MAX)	79 mA	
15	DC POWER -9V TO -18 V	200 mA (MAX)	140 mA	
16	VIDEO LOAD	100 OHMS ± 10 %	100 OHMS	

TESTED ON: HP 8350 Sweep Oscillator, Agilent 8593E Spectrum Analyzer, Agilent 34410A Digital Multimeter,
HP E3631A Power Supply, Agilent E8257D Analog Signal Generator, Agilent DSO6034A

QA/QC APPROVAL: _____ DATED: _____

LOG TRANSFER WITH FREQUENCY @ 25 °C
 MODEL: SDLVA-0120-70-CONDOR OPTION :
 TESTED BY: D. DURBIN
 DATE: 7/29/09


SERIAL No. : PL5744



PLANAR MONOLITHICS INDUSTRIES
 7311-F GROVE ROAD, FREDERICK, MD 21704 USA
 TEL: 301-662-5019 FAX: 301-662-1731
 URL: WWW.PMI-RF.COM
 EMAIL: SALES@PMI-RF.COM
 ISO 9001:2000 CERTIFIED

Frequency			-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	RF Input Power (dBm)
750 MHz	INTERCEPT (mV)	1805	266	394	528	641	789	904	1028	1167	1288	1409	1558	1670	1818	1930	Measured Value (mV)
	SLOPE (mV/dB)	25.67	1	1	7	-10	10	-3	-7	3	-4	-11	10	-7	13	-4	Error (mV)
	LIMITED IF OUTPUT (dBm)		-5.24	-5.08	-4.99	-4.92	-4.92	-4.90	-4.90	-4.88	-4.90	-4.90	-4.90	-4.90	-4.90	-4.90	-4.90
1.0 GHz	INTERCEPT (mV)	1702	236	358	485	595	733	847	962	1094	1210	1326	1465	1576	1711	1819	Measured Value (mV)
	SLOPE (mV/dB)	24.42	0	0	5	-8	8	0	-6	3	-3	-10	8	-3	10	-4	Error (mV)
	LIMITED IF OUTPUT (dBm)		-6.38	-5.89	-5.75	-5.66	-5.64	-5.61	-5.61	-5.61	-5.64	-5.61	-5.61	-5.61	-5.64	-5.61	Measured Value (mV)
1.25 GHz	INTERCEPT (mV)	1585	195	312	430	538	670	782	890	1013	1124	1231	1360	1463	1590	1694	Measured Value (mV)
	SLOPE (mV/dB)	23.1	-4	-2	0	-7	9	6	-2	6	2	-7	6	-6	5	-6	Error (mV)
	LIMITED IF OUTPUT (dBm)		-7.19	-6.38	-6.16	-6.07	-6.07	-6.04	-6.04	-6.04	-6.04	-6.07	-6.07	-6.07	-6.07	-6.07	Measured Value (mV)

LINEARITY(-60 TO +5 dBm) ± 0.51 dB
 FREQUENCY FLATNESS ± 4.72 dB

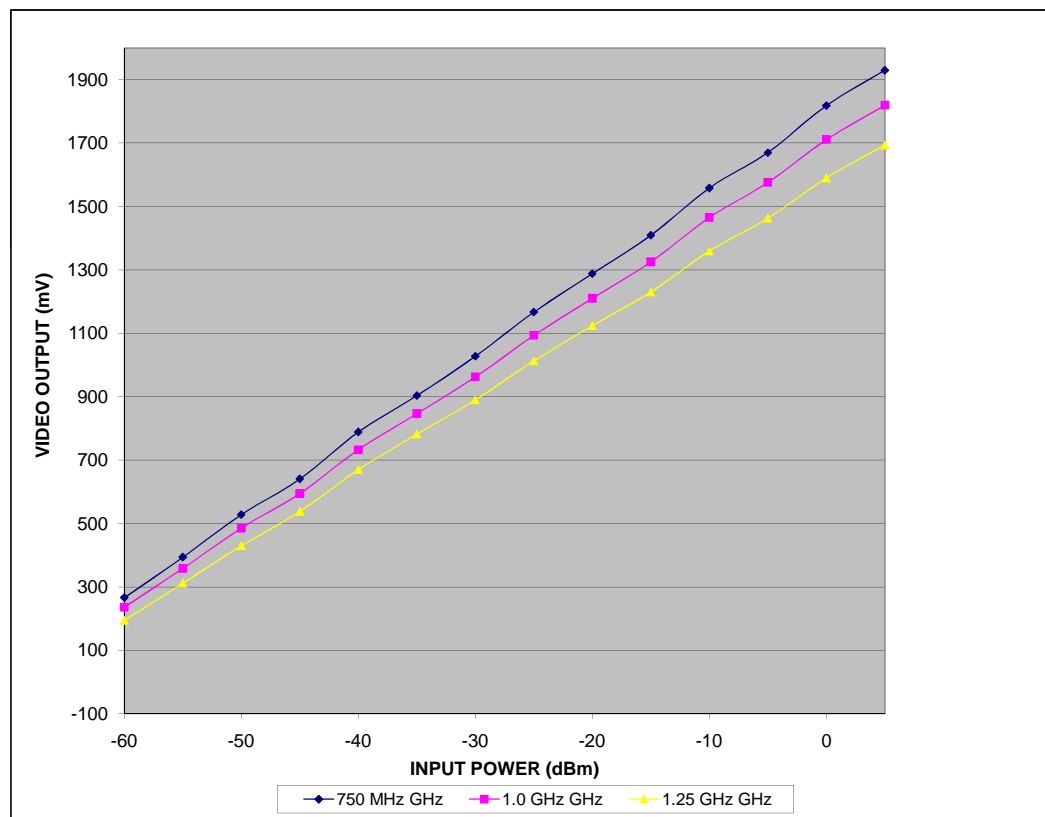

LIMITED IF OUTPUT MAX -4.88 dBm
 LIMITED IF OUTPUT MIN -7.19 dBm
 LIMITED IF FLATNESS ± 1.16 dB