



**SUMMARY TEST DATA  
ON  
BPF-9D05G9D49G-SFF**

Customer: \_\_\_\_\_  
 SO: \_\_\_\_\_  
 Model No: BPF-9D05G9D49G-SFF  
 Serial No: PL58093/2608

Tested By: A Karoly  
 Temperature: 25°C  
 Date: 2/18/2026  
 Drawing No: 27653840 Rev: A1



TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency	9.05 GHz TO 9.49 GHz	<b>9.05 GHz TO 9.49 GHz</b>	
2	Insertion Loss	1 dB MAX	<b>0.61 dB (See Graph)</b>	
3	Passband Ripple	0.6 dB MAX	<b>±0.07 dB (See Graph)</b>	
4	VSWR	1.5:1 MAX	<b>1.2:1 (See Graph)</b>	
5	Rejection @ 8.65-8.865 GHz	25 dB MIN	<b>30.7 dB (See Graph)</b>	
6	Group Delay	2 ns MAX	<b>1.49 ns (See Graph)</b>	



\*FOR ALL OTHER SPECIFICATIONS, SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE

QA/AC Approval: \_\_\_\_\_

Date: \_\_\_\_\_

7309-A Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731  
 Email: sales@pmi-rf.com

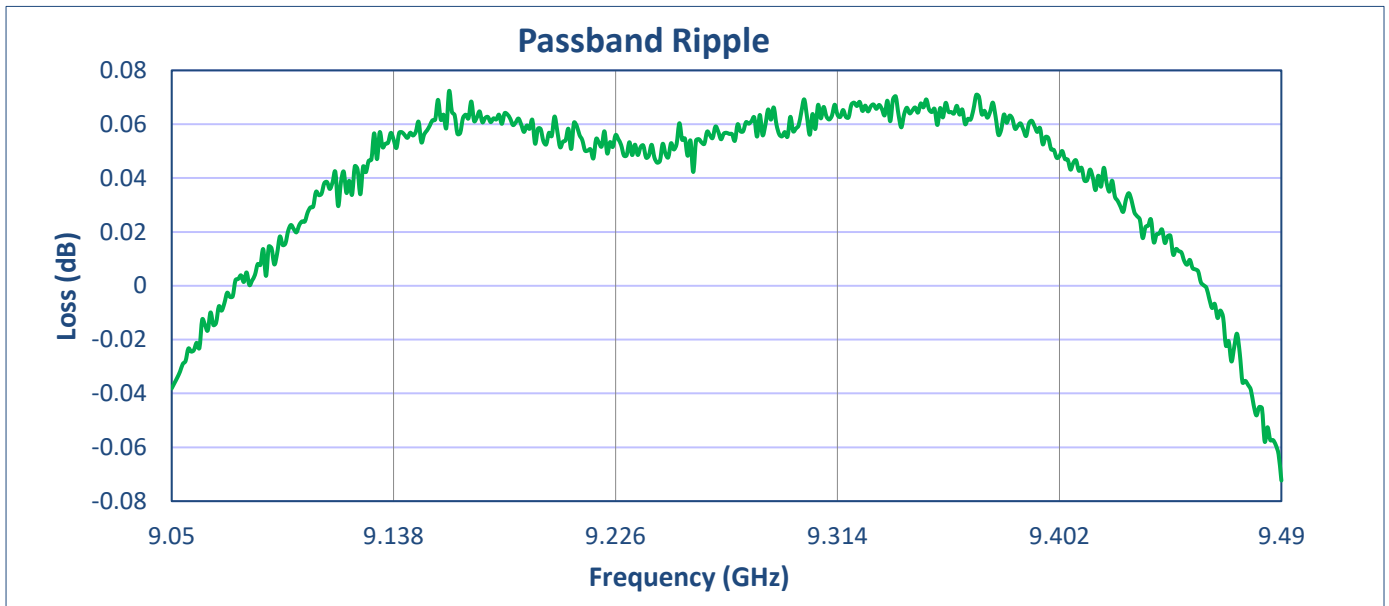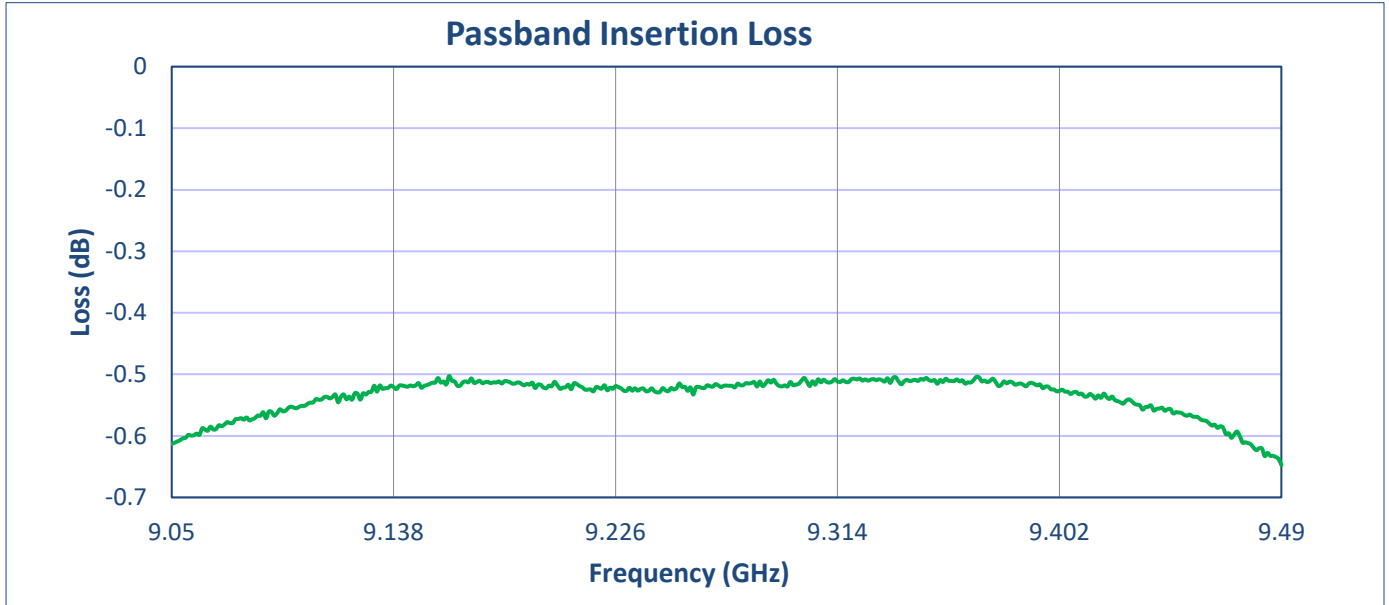

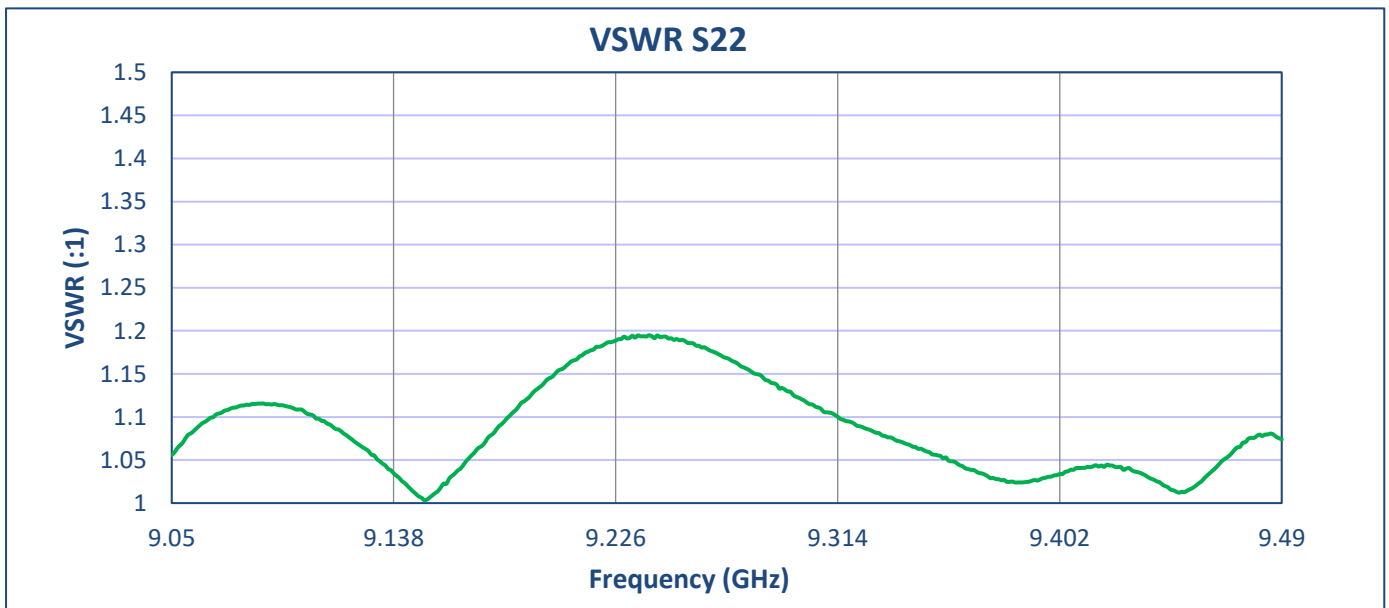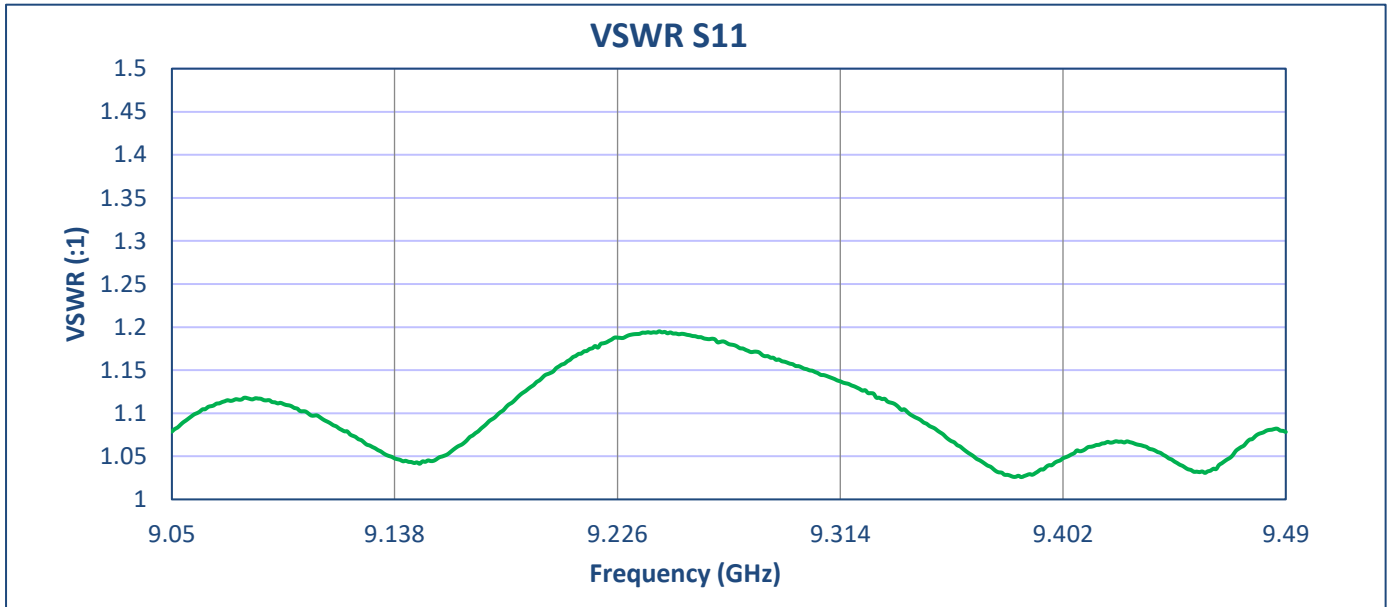

**SUMMARY TEST DATA  
ON  
BPF-9D05G9D49G-SFF**

PL58093/2608

