



SUMMARY TEST DATA ON P12T-0R5G18G-60-T-SFF

Customer: _____
 SO No: _____
 Model No: P12T-0R5G18G-60-T-SFF
 Serial No: PL58737/2612

Tested By: A. Mousavi
 Temperature: +25° C
 Date: 3/21/2026
 Drawing No: 27631860 Rev: B1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA
			+25°C	QC
1	Frequency Range:	0.5 to 18 GHz	0.5 to 18 GHz	PMI QA1
2	Isolation:	60 dB Minimum	80.89 dB See Graphs	PMI QA1
3	Insertion Loss:	5.5 dB Maximum	4.66 dB See Graphs	
4	VSWR (In/Out):	2.0:1 Max.	1.95:1 See Graphs	
5	Switching Speed:	100 ns Max.	Pass See Typical Characteristics	
6	Power Handling:	+25 dBm CW Max.	Pass See Typical Characteristics	
7	Control:	TTL, 4 Bit (See Logic Table)	TTL, 4 Bit (See Logic Table)	
8	DC Supply:	+5V @ 600 mA Max. -5V @ 200 mA Max.	+5V @ 340 mA -5V @ 190 mA	



LOGIC TABLE				
E4	E3	E2	E1	CONNECTOR
0	0	0	0	J2 ON
0	0	0	1	J3 ON
0	0	1	0	J4 ON
0	0	1	1	J5 ON
0	1	0	0	J6 ON
0	1	0	1	J7 ON
0	1	1	0	J8 ON
0	1	1	1	J9 ON
1	0	0	0	J10 ON
1	0	0	1	J11 ON
1	0	1	0	J12 ON
1	0	1	1	J13 ON

QA/QC Approval:  PMI
QA1

Date: 3/23/26



SUMMARY TEST DATA ON P12T-0R5G18G-60-T-SFF

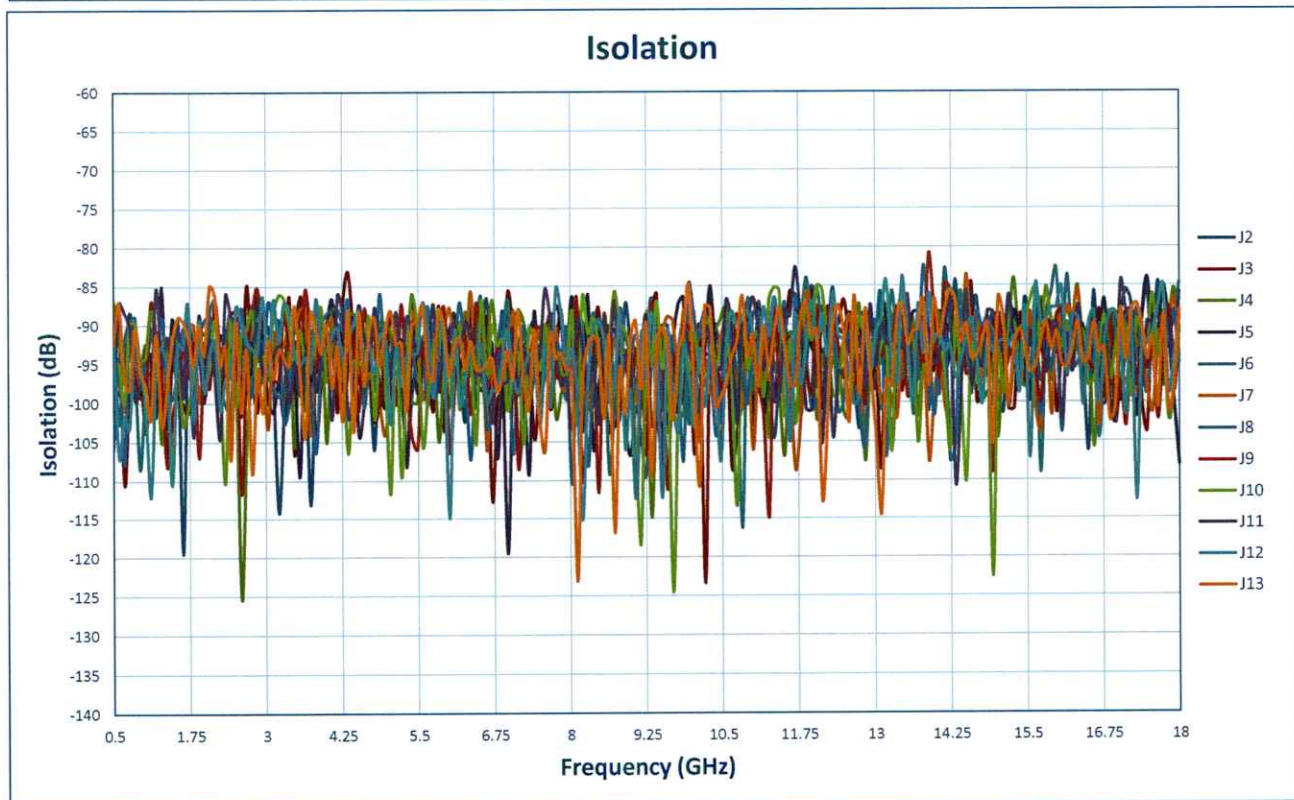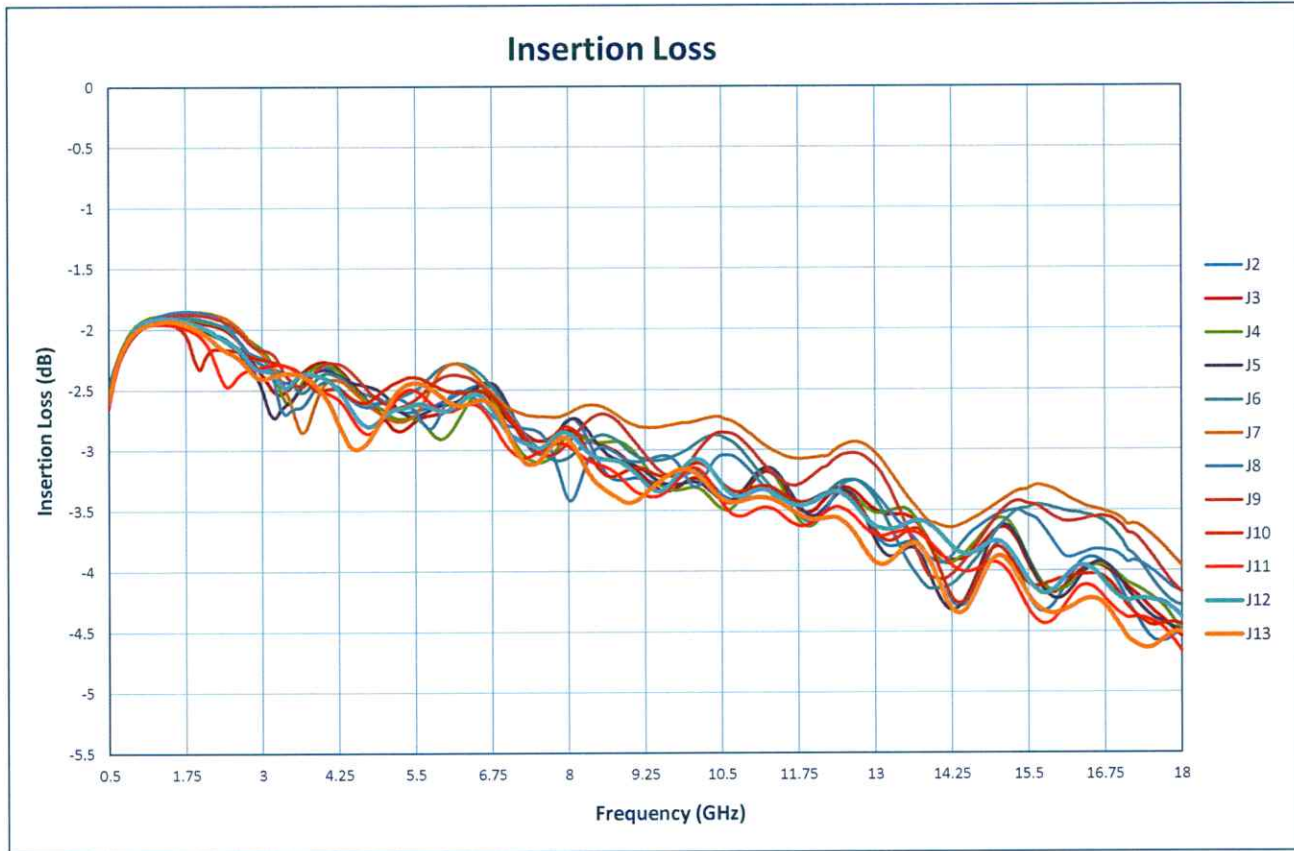



SUMMARY TEST DATA ON P12T-0R5G18G-60-T-SFF

