

**SUMMARY TEST DATA  
 ON  
 JTIDS-0002**


CUSTOMER: \_\_\_\_\_ TESTED BY: K. Wagaman  
 SO: \_\_\_\_\_ TEMPERATURE: +25°C  
 MODEL NO: JTIDS-0002 DATE: 3/24/2026  
 SERIAL NO: PL58775/2613 DRAWING NO: 27652740 REV: A1

TEST ITEM NO:	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Center Frequency	1090 MHz	1090 MHz	PMI QA6
2	Notched Bandwidth	260 MHz	260 MHz	
3	Passband Insertion Loss (DC - 910 MHz, 1270 - 2400 MHz)	6.0 dB MAX	3.3 dB (DC to 910 MHz)	
			5.22 dB (1260 to 2400 MHz)	
			See Graph	
4	Passband VSWR	2.0:1 TYP 3.5:1 MAX AT PASSBAND EDGES	2.23 :1 See Graph	
5	Rejection	-40 dBC MIN @ 960 to 1220 MHz	45.11 dBC See Graph	PMI QA6

QA/QC Approval: *Anthony Krosby* <sup>PMI QA6</sup> Date: 3/24/26

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731  
 Email: sales@pmi-rf.com

# SUMMARY TEST DATA ON JTIDS-0002

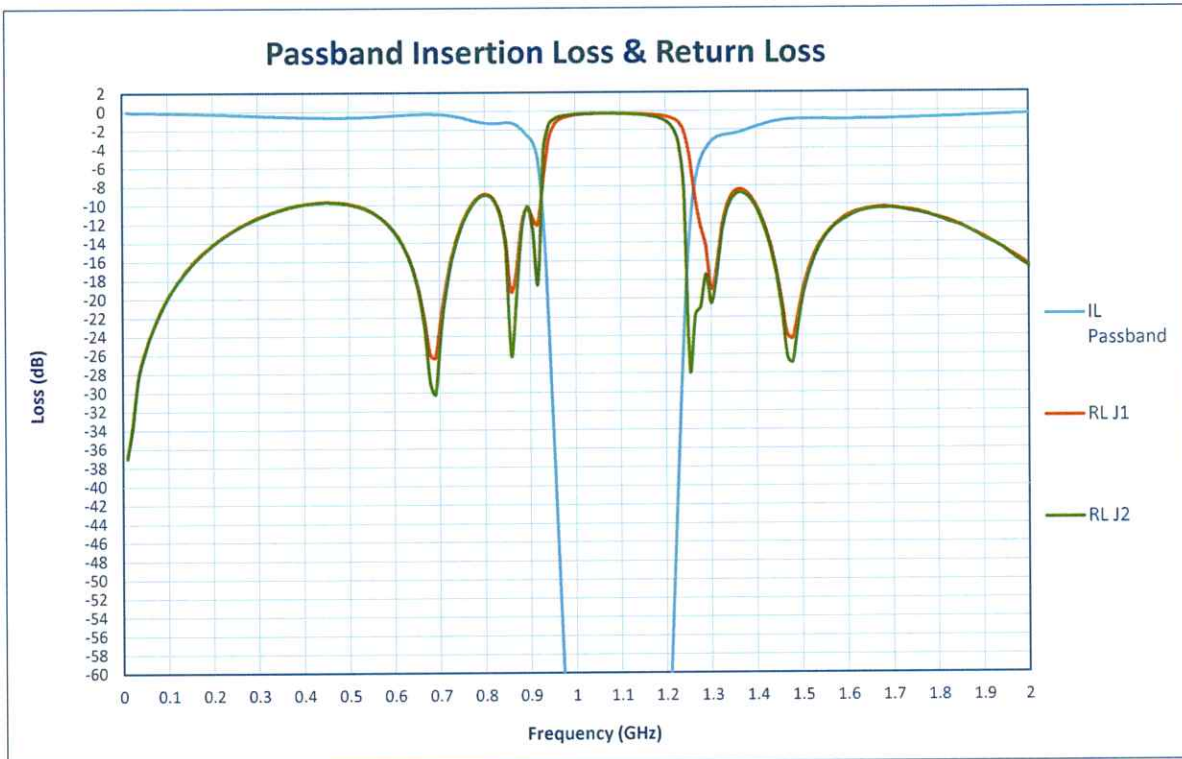

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731  
Email: sales@pmi-rf.com