

**SUMMARY TEST DATA
ON
SWN-1170-4DT-SP**

Customer: _____
 SO No: _____
 Model No: SWN-1170-4DT-SP
 Serial No: PL58778/2613



Tested By: A. Mousavi
 Temperature: +25°C
 Date: 3/24/2026
 Drawing No: 27612580 Rev: B1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range:	500 MHz to 18 GHz	500 MHz to 18 GHz	PMI QAS	
2	Insertion Loss:	5 dB Max @ 25°C	5 dB See Plot	PMI QAS	
3	Isolation:	70 dB Min	71.79 dB See Plot		
4	VSWR: In/Out	2.0:1 Max	2:1 See Plot		
5	Switching Speed:	100 ns Max. 50% TTL to 10% / 90% RF	See Typical Characteristics		
6	Input Power	+10 dBm CW	See Typical Characteristics		
7	Survival Power:	1W CW, 10W Peak 1 μ s 1% Duty Cycle, 1 μ s PW	See Typical Characteristics		
8	Control:	Individual TTL Control "0" = ON & "1" = OFF	Individual TTL Control "0" = ON & "1" = OFF		
9	Power Supply:	+5 VDC @ 200mA MAX -5 VDC @ 100mA MAX	+5 VDC @ 122 mA -5 VDC @ 92 mA		PMI QAS

QA/QC Approval: *Jordan Boyd*

Date: 3-25-26

SUMMARY TEST DATA ON SWN-1170-4DT-SP

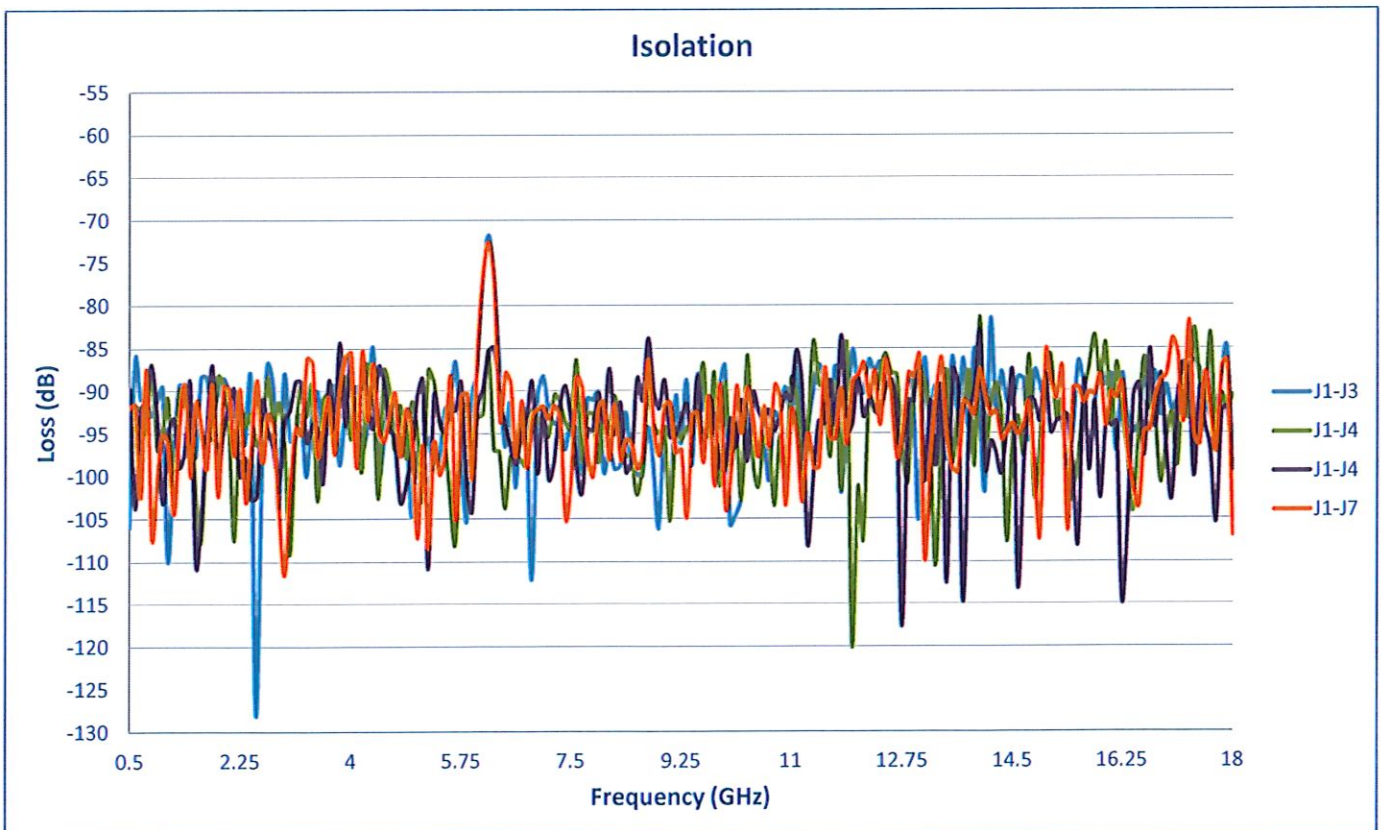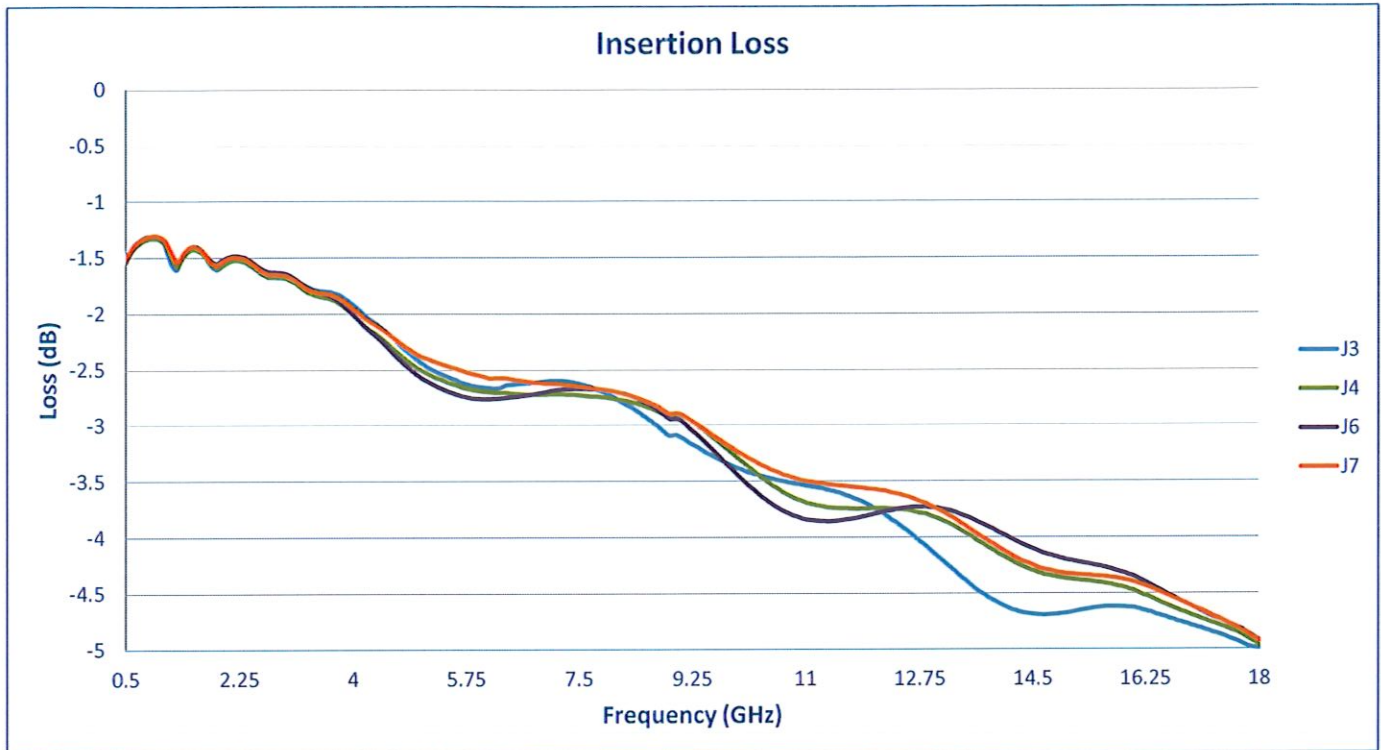

**SUMMARY TEST DATA
ON
SWN-1170-4DT-SP**

