




**SUMMARY TEST DATA  
ON  
P2T-18G42G-60-R-55-292FF**

Customer: \_\_\_\_\_  
 SO No: \_\_\_\_\_  
 Model No: P2T-18G42G-60-R-55-292FF  
 Serial No: PL58850/2613


Tested By: A. Mousavi  
 Temperature: 25°C  
 Date: 3/27/2026  
 Drawing No: 27652480 Rev: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	18 GHz TO 42 GHz	18 GHz TO 42 GHz	PMI QAS
2	VSWR: In/Out	2.5:1 Max	In 2.49:1 Out 2.47 :1 See Plot	
3	Insertion Loss:	4.5 dB Goal 5.5 dB Max	4.4 dB See Plot	
4	Isolation:	60 dB Min.	62 dB See Plot	
5	Switching Speed:	DRIVER DELAY AND SWITCH TIME (ON) (50% TTL TO INSERTION LOSS): 200 ns Max	139 ns	
		DRIVER DELAY AND SWITCH TIME (OFF) (50% TTL TO INSERTION LOSS): 200 ns Max	146 ns	
6	DC Supply:	+5 VDC ±5% @ 175 mA Max. -5 VDC +5% TO -12 VDC -5% @ 75 mA Max.	+5 VDC @ 20 mA -5 VDC TO -12 VDC @ 30 mA	
7	Control Signal:	TTL LOGIC 0: J2 ENABLED 1: J3 ENABLED	TTL LOGIC 0: J2 ENABLED 1: J3 ENABLED	PMI QAS


QA/QC Approval: *Jordan Byrd* Date: 3-30-26

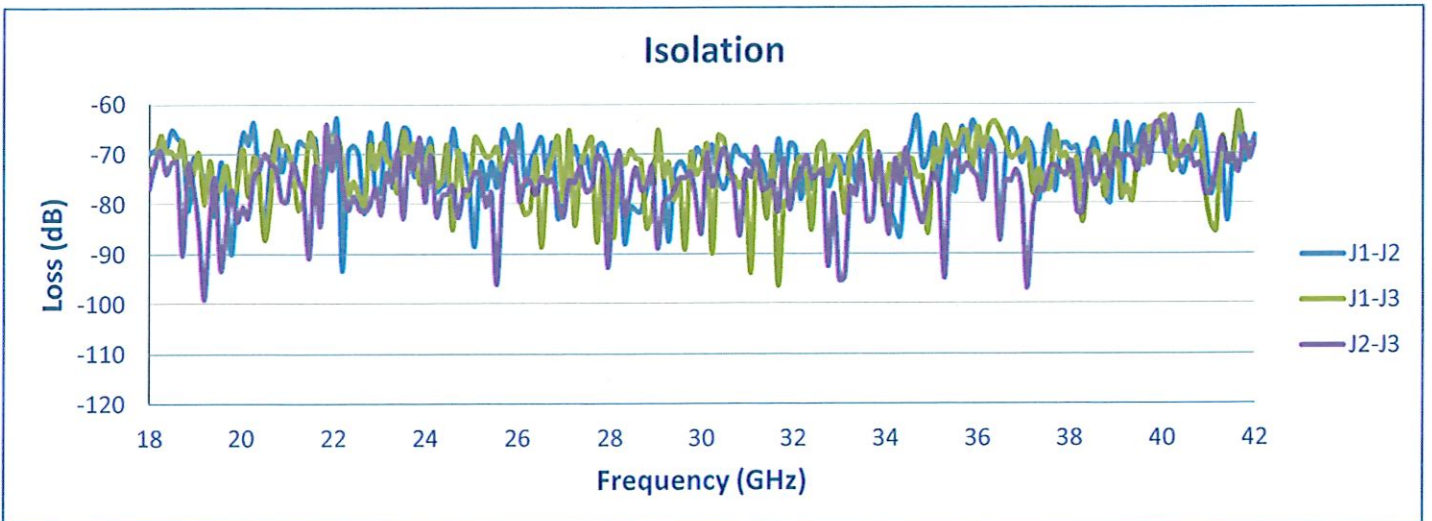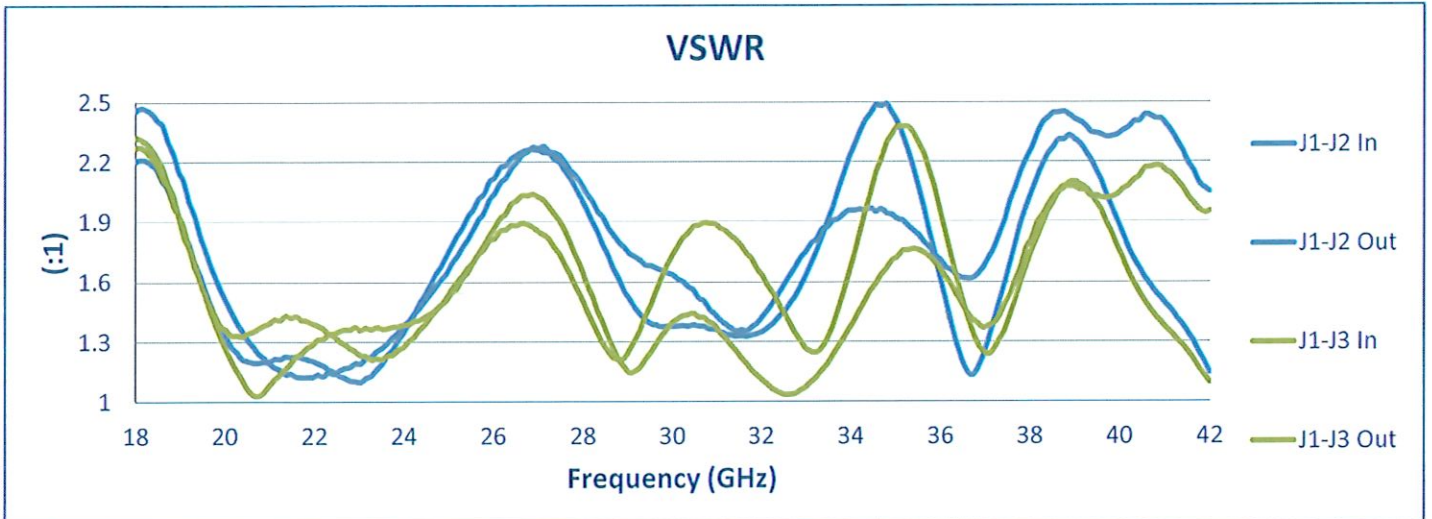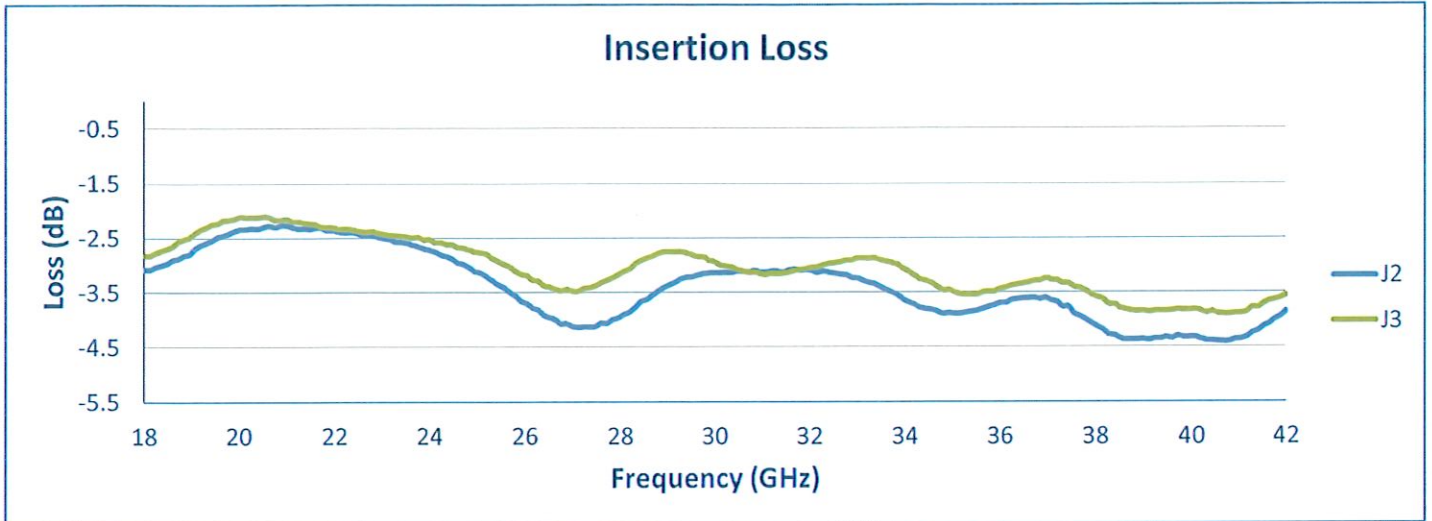

**J2 Rise Time Delay**  
Green=TTL Yellow=RF

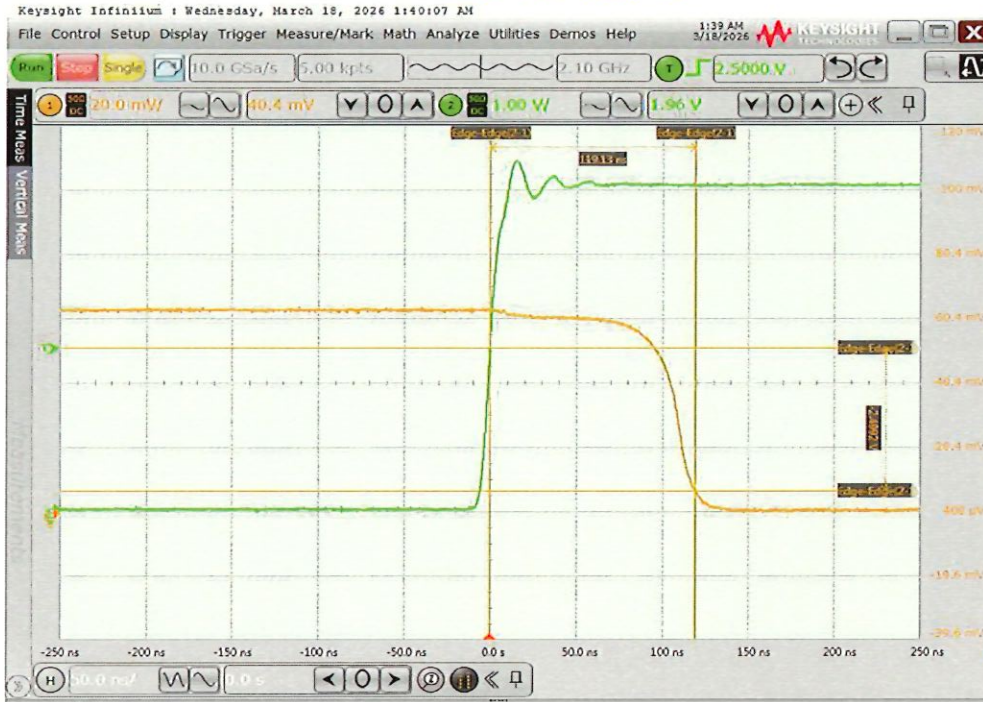


**J2 Fall Time Delay**  
Green=TTL Yellow=RF

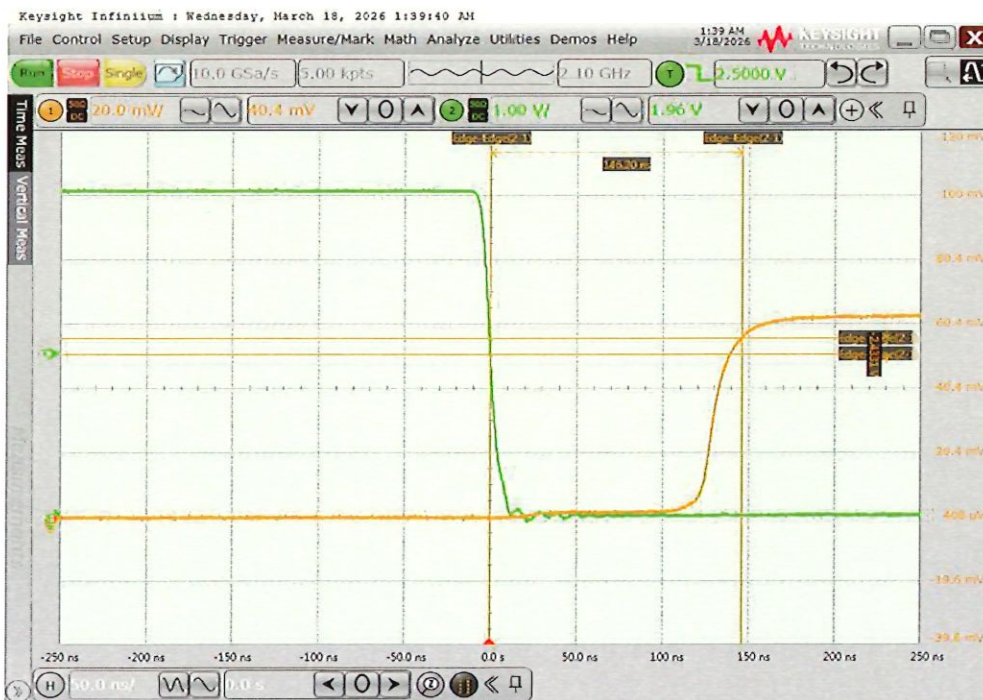

**J3 Rise Time Delay**

Green=TTL Yellow=RF

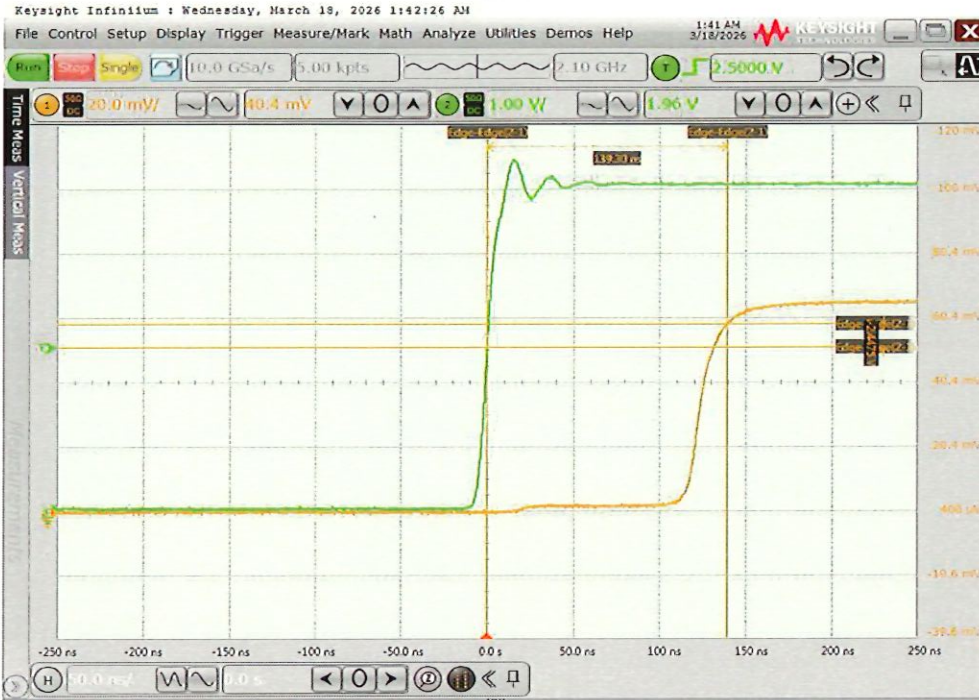

**J3 Fall Time Delay**

Green=TTL Yellow=RF

