

**SUMMARY TEST DATA**  
**ON**  
**LM-1G2G-4CW-1KWP-SMF**

Customer: \_\_\_\_\_  
SO No: \_\_\_\_\_  
Model No: LM-1G2G-4CW-1KWP-SMF  
Serial No: PL59264/2617

Tested By: OLIVER K  
Temperature: +25°C  
Date: 4/23/2026  
Drawing No: 27629433 REV: B1



Test Item No.	Parameters	Specified Value	Test Results	QA QC
1	Frequency Range:	1.0 GHz to 2.0 GHz	1.0 GHz to 2.0 GHz	<i>PMI</i> <i>QAS</i>
2	Insertion Loss:	0.7 dB Max. @ -10 dBm Input	0.67 dB See Graph	
3	VSWR:	2.0:1 Max. @ -10 dBm Input	1.37:1 In 1.34:1 Out See Graph	
4	Impedance:	50 Ω	50 Ω	
5	Input Power:	4 W CW Min. 1KW Peak (1% Duty Cycle, 1 μs Max. Pulse Width)	Pass See Typical Characteristics	
6	Maximum Flat Leakage:	16 dBm (40 mW) Max.	Pass See Typical Characteristics	
7	Limiting Threshold:	+5 dBm Min	+12 dBm See Graph	
8	Recovery Time:	1 μs Max	Pass See Typical Characteristics	

1. EXTERNAL DC BLOCKS ARE REQUIRED FOR PROPER FUNCTION.

QA/QC Approval: *Jordan Boyd*

Date: 4.24.26

**SUMMARY TEST DATA  
ON  
LM-1G2G-4CW-1KWP-SMF**

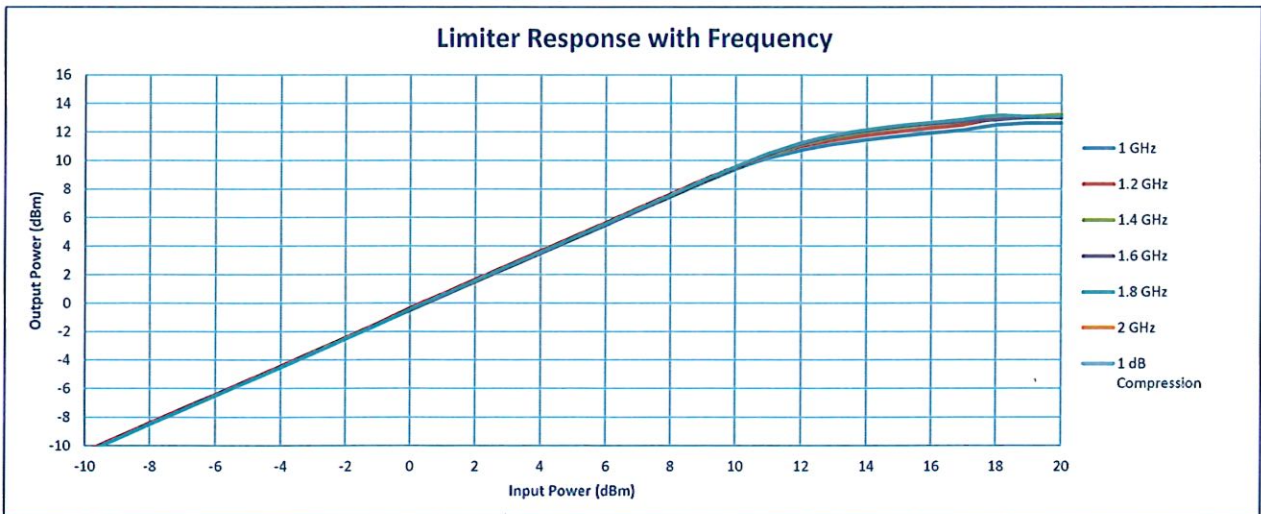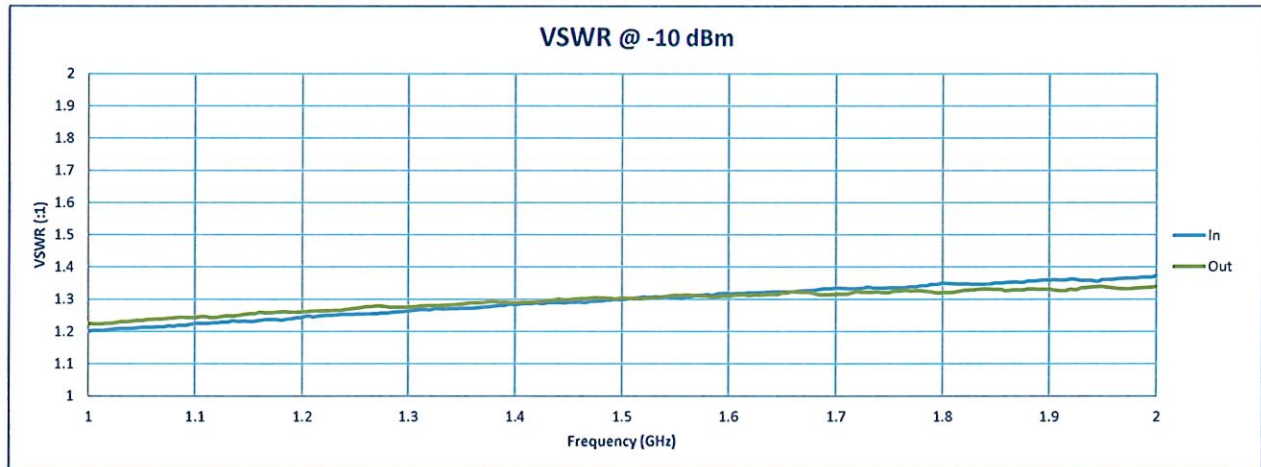

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731  
Email: sales@pmi-rf.com