



**SUMMARY TEST DATA  
ON  
BPF-2D2G2D29G-5W-SFF**

Customer: \_\_\_\_\_  
 SO: \_\_\_\_\_  
 Model No: BPF-2D2G2D29G-5W-SFF  
 Serial No: PL59406/2618

Tested By: OLIVER K  
 Temperature: 25 °C  
 Date: 4/27/2026  
 Drawing No: 27653680 Rev: A1


TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC	
1	Passband Frequency Range	2.2 GHz to 2.29 GHz	2.2 GHz to 2.29 GHz	PMI QA6	
2	Insertion Loss	0.8 dB Max.	0.5 dB		
3	Ripple	±0.2 dB Max.	±0.08 dB		
4	VSWR	1.3:1 Max.	1.17:1		
5	Rejection @ DC to 2.11 GHz	40 dB Min.	55.1 dB		
6	Rejection @ 2.4 GHz to 5 GHz	40 dB Min.	53 dB		
7	Input Power	5W CW Max.	5W		PMI QA6

\* FOR ALL OTHER SPECIFICATIONS, PLEASE SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE


QA/AC Approval: Anthony Kardly PMI QA6

Date: 4/29/26

**SUMMARY TEST DATA  
ON  
BPF-2D2G2D29G-5W-SFF**

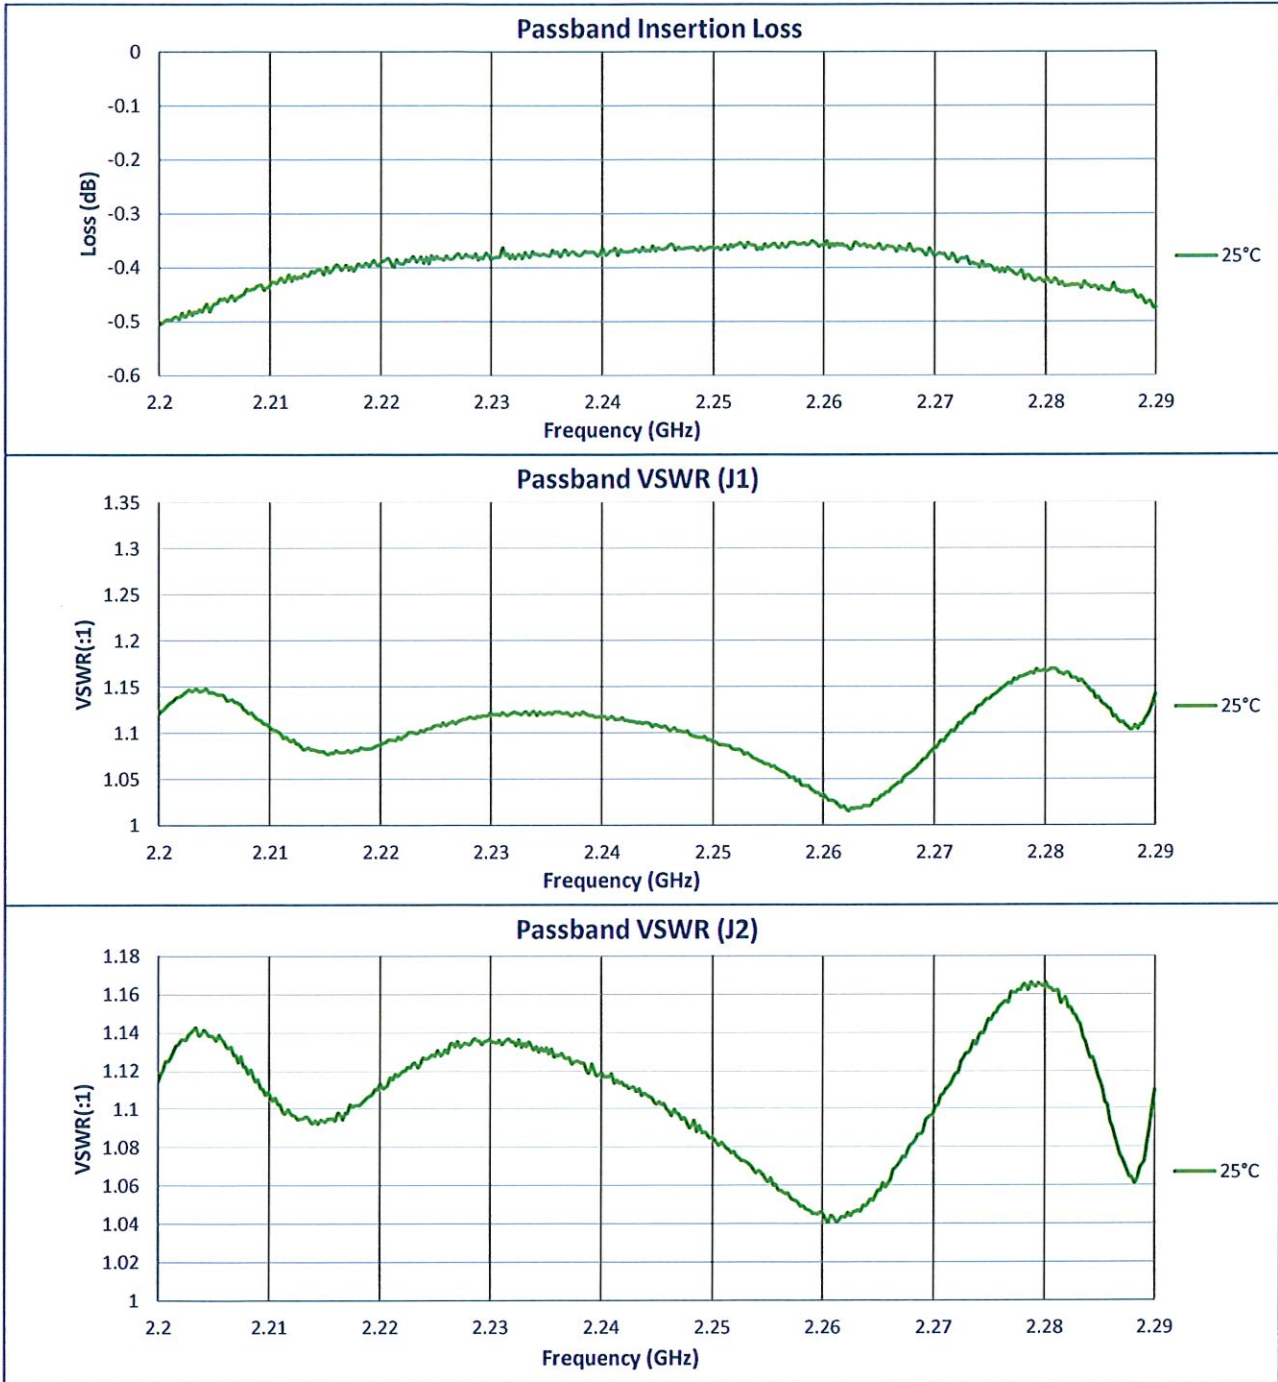

**SUMMARY TEST DATA  
ON  
BPF-2D2G2D29G-5W-SFF**

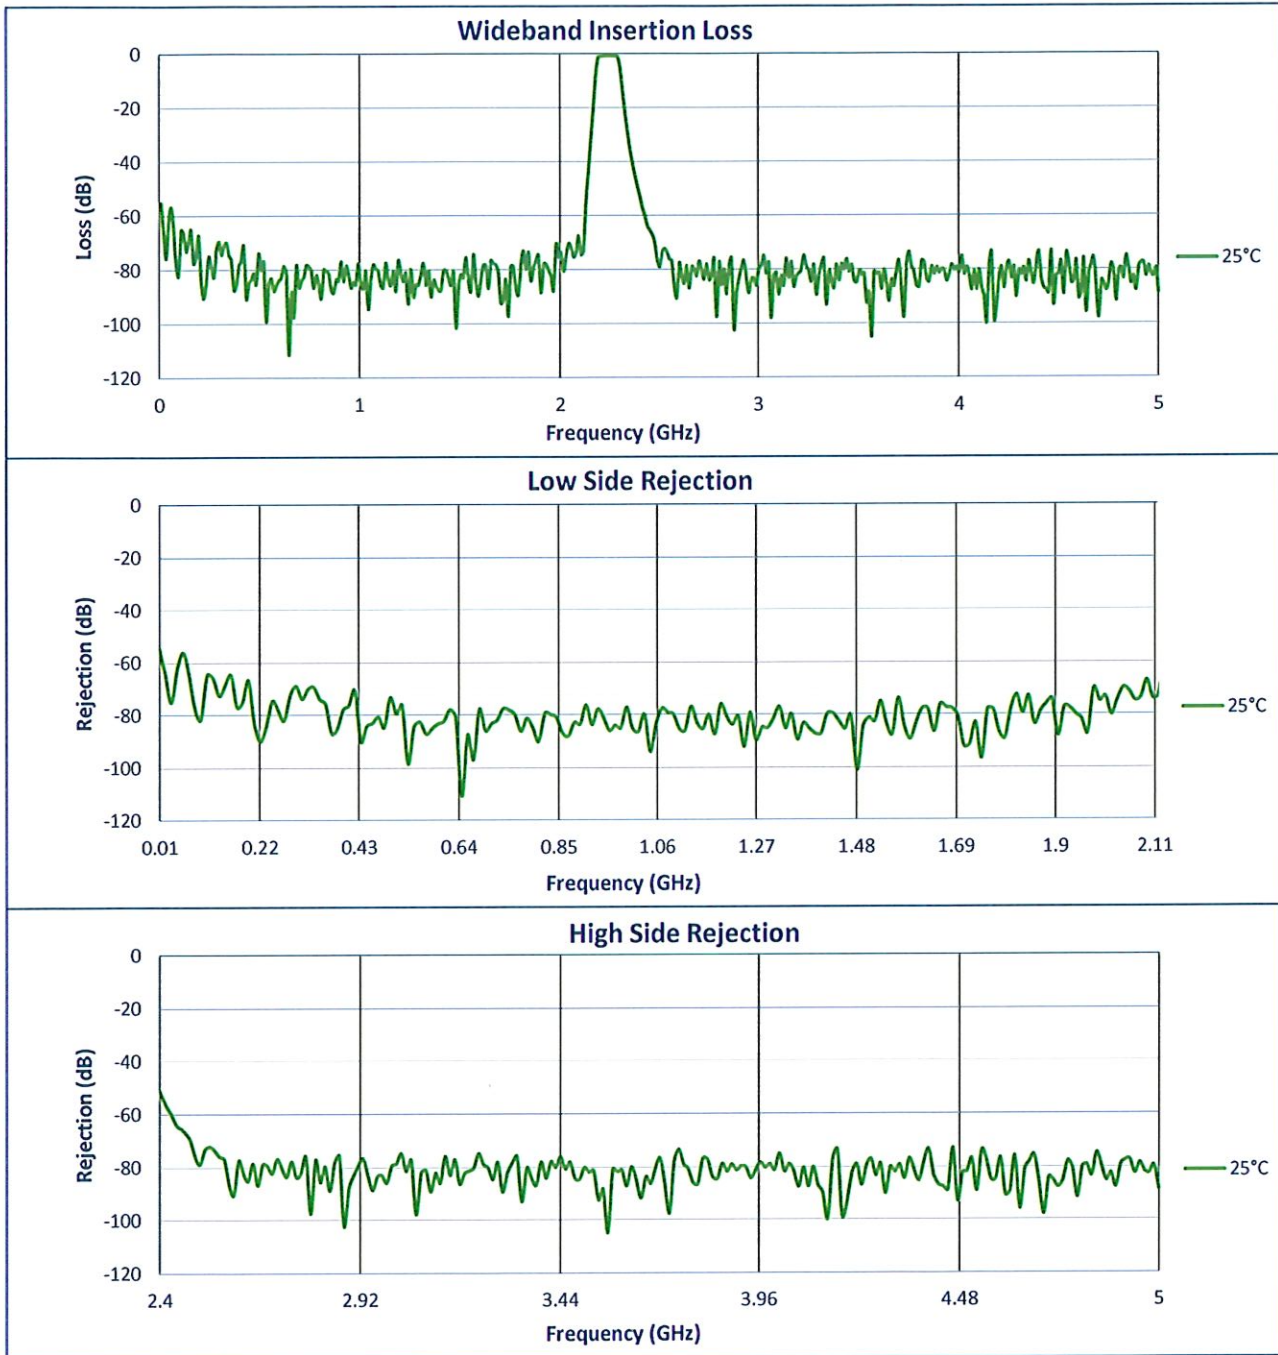

SUMMARY TEST DATA  
ON  
BPF-2D2G2D29G-5W-SFF

