



SUMMARY TEST DATA  
ON  
BPF-2D2G2D29G-5W-SFF

Customer: \_\_\_\_\_  
SO: \_\_\_\_\_  
Model No: BPF-2D2G2D29G-5W-SFF  
Serial No: PL59408/2618


Tested By: OLIVER K  
Temperature: 25° C  
Date: 4/27/2026  
Drawing No: 27653680 Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency Range	2.2 GHz to 2.29 GHz	2.2 GHz to 2.29 GHz	PMI QA6
2	Insertion Loss	0.8 dB Max.	0.54 dB	
3	Ripple	±0.2 dB Max.	±0.08 dB	
4	VSWR	1.3:1 Max.	1.15:1	
5	Rejection @ DC to 2.11 GHz	40 dB Min.	55.5 dB	
6	Rejection @ 2.4 GHz to 5 GHz	40 dB Min.	56.1 dB	
7	Input Power	5W CW Max.	5W	PMI QA6


\* FOR ALL OTHER SPECIFICATIONS, PLEASE SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE

QA/AC Approval: Anthony Krawczyk PMI QA6 Date: 4/29/26

**SUMMARY TEST DATA  
ON  
BPF-2D2G2D29G-5W-SFF**

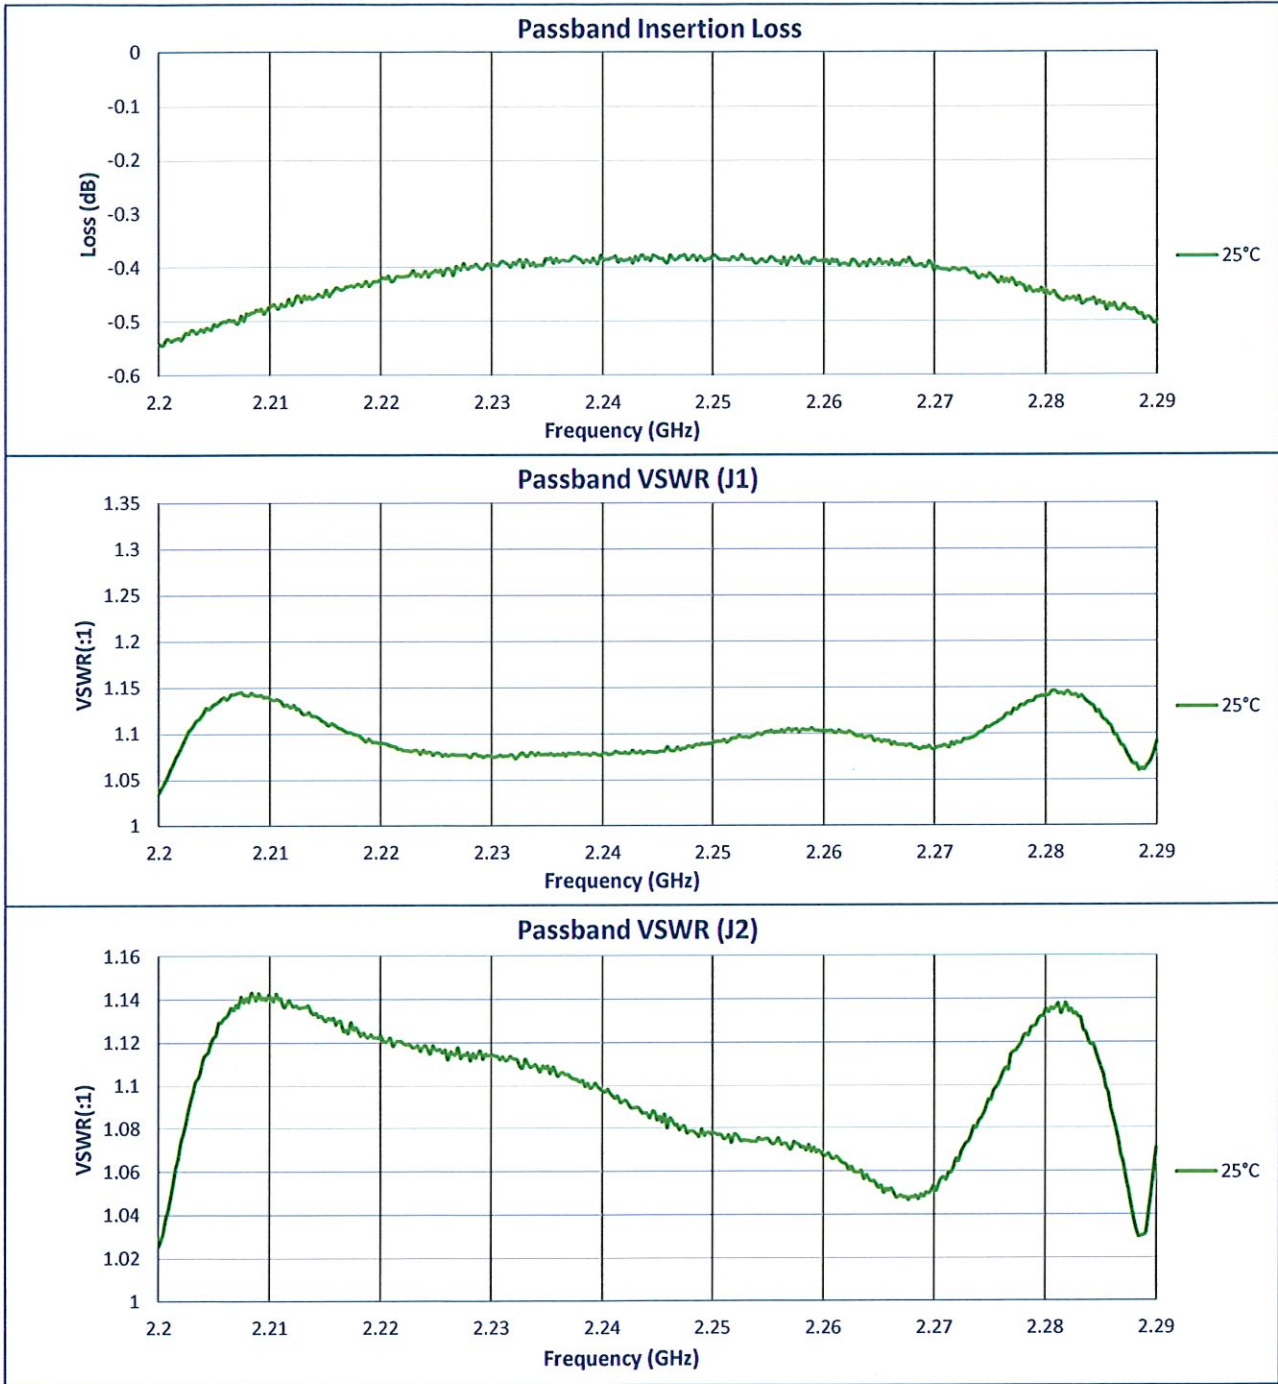

**SUMMARY TEST DATA  
ON  
BPF-2D2G2D29G-5W-SFF**

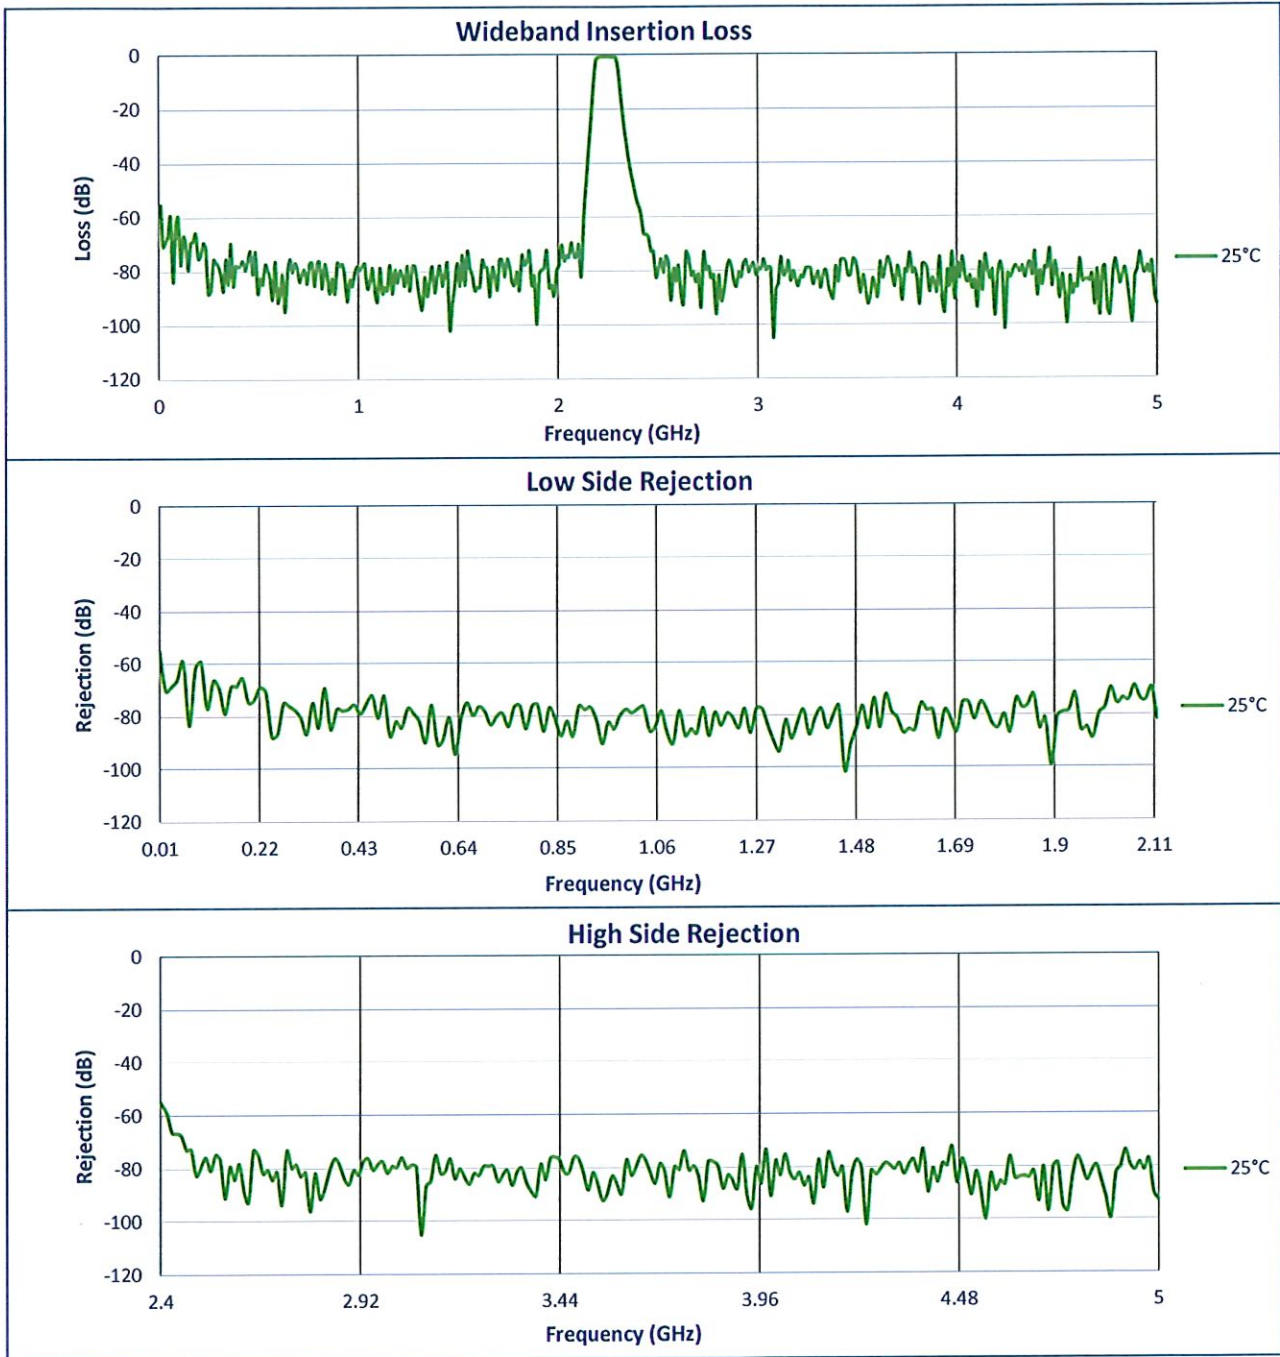

SUMMARY TEST DATA  
ON  
BPF-2D2G2D29G-5W-SFF

