



SUMMARY TEST DATA ON BPF-2D2G2D29G-5W-SFF

Customer: _____
SO: _____
Model No: **BPF-2D2G2D29G-5W-SFF**
Serial No: **PL59409/2618**

Tested By: **OLIVER K**
Temperature: **25 °C**
Date: **4/27/2026**
Drawing No: **27653680** Rev: **A1**




TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency Range	2.2 GHz to 2.29 GHz	2.2 GHz to 2.29 GHz	PMI QA6
2	Insertion Loss	0.8 dB Max.	0.59 dB	PMI QA6
3	Ripple	±0.2 dB Max.	±0.11 dB	
4	VSWR	1.3:1 Max.	1.2:1	
5	Rejection @ DC to 2.11 GHz	40 dB Min.	64 dB	
6	Rejection @ 2.4 GHz to 5 GHz	40 dB Min.	55.8 dB	
7	Input Power	5W CW Max.	5W	

* FOR ALL OTHER SPECIFICATIONS, PLEASE SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE


QA/AC Approval: Anthony Kardly PMI QA6

Date: 4/29/26

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

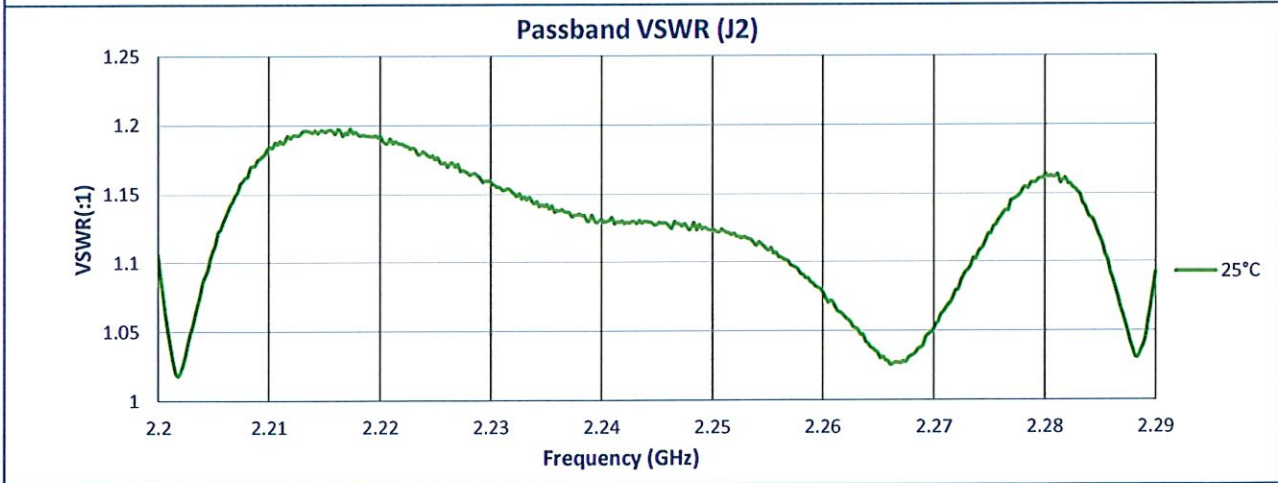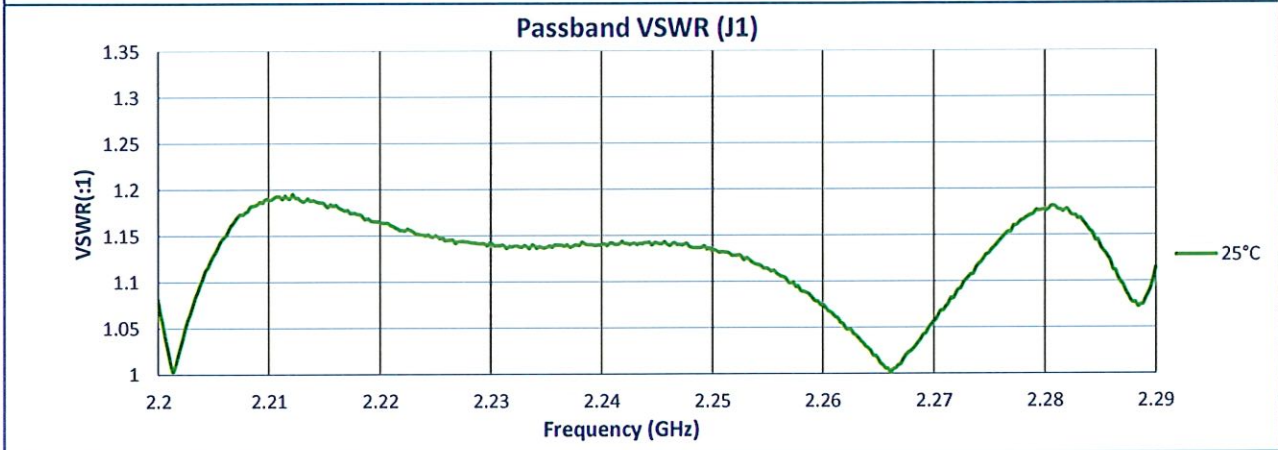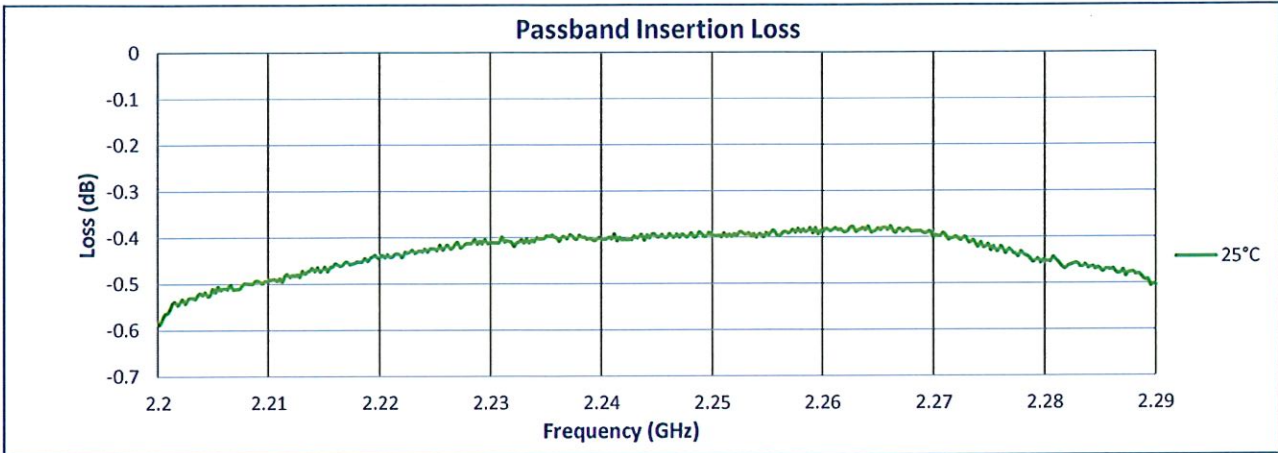

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

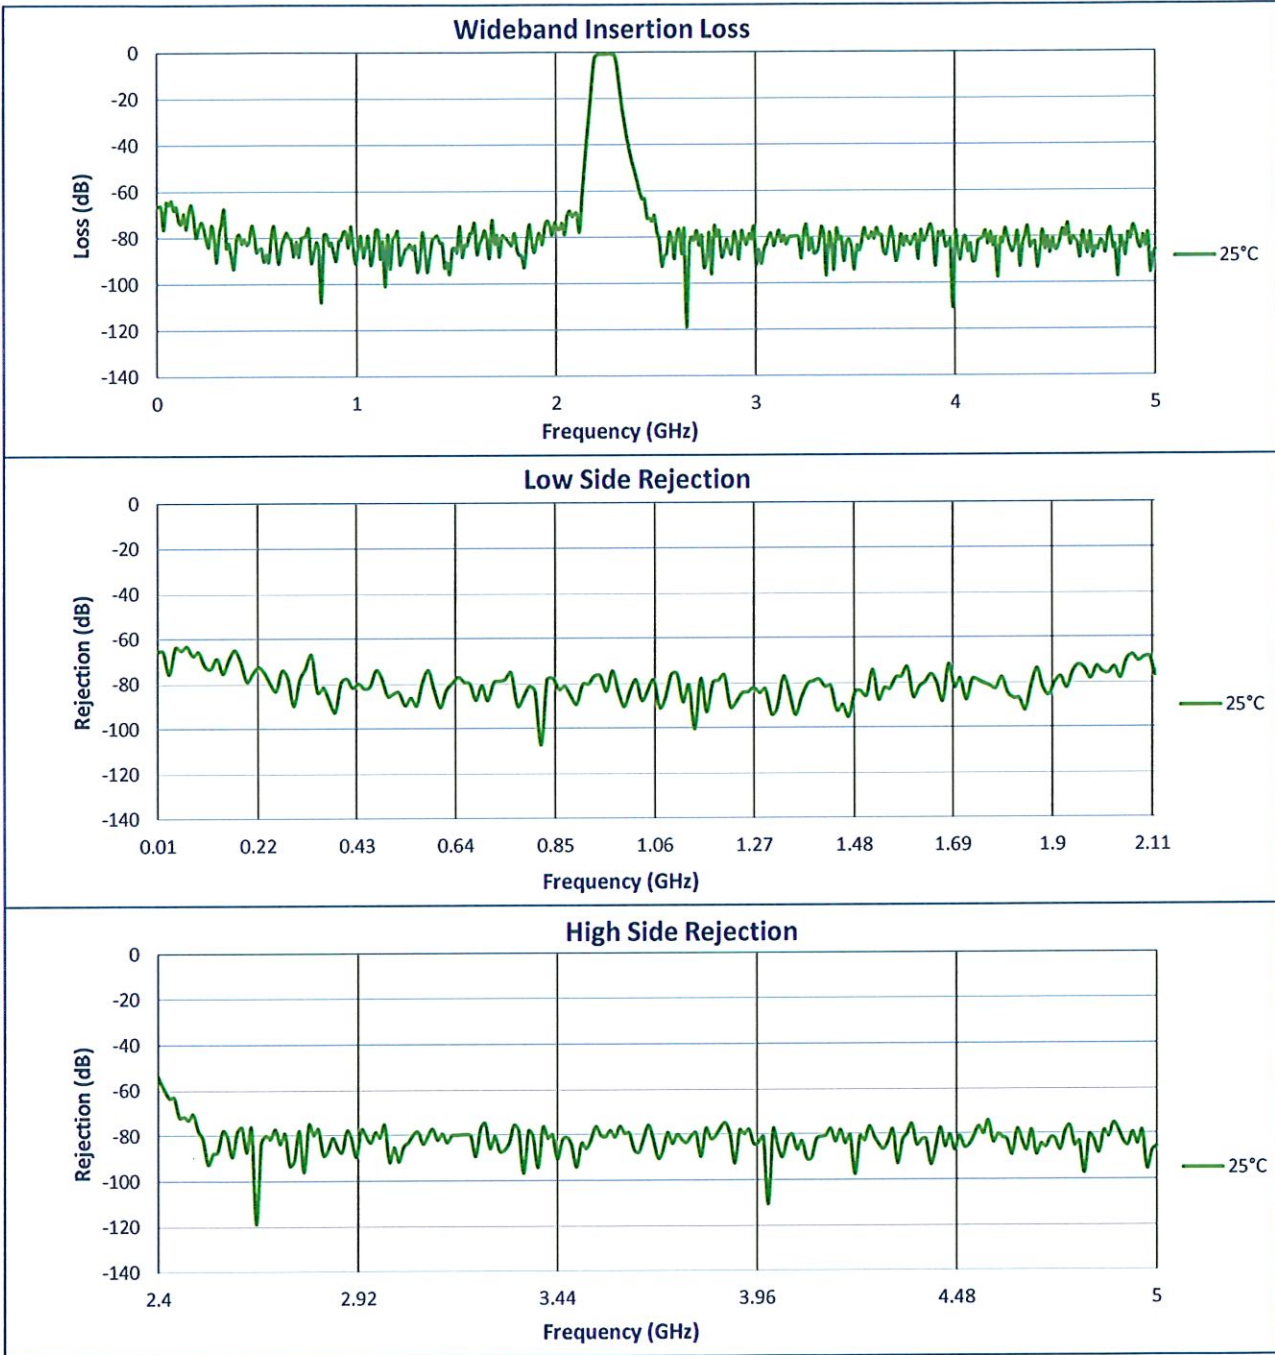

SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF

