



**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

Customer: _____
 SO: _____
 Model No: BPF-2D2G2D29G-5W-SFF
 Serial No: PL59412/2618


Tested By: OLIVER K
 Temperature: 25°C
 Date: 4/27/2026
 Drawing No: 27653680 Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC	
1	Passband Frequency Range	2.2 GHz to 2.29 GHz	2.2 GHz to 2.29 GHz	PMI QA6	
2	Insertion Loss	0.8 dB Max.	0.56 dB		
3	Ripple	±0.2 dB Max.	±0.08 dB		
4	VSWR	1.3:1 Max.	1.2:1		
5	Rejection @ DC to 2.11 GHz	40 dB Min.	55.7 dB		
6	Rejection @ 2.4 GHz to 5 GHz	40 dB Min.	55.7 dB		
7	Input Power	5W CW Max.	5W		PMI QA6


* FOR ALL OTHER SPECIFICATIONS, PLEASE SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE

QA/AC Approval: Anthony Kardly PMI QA6 Date: 4/29/26

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

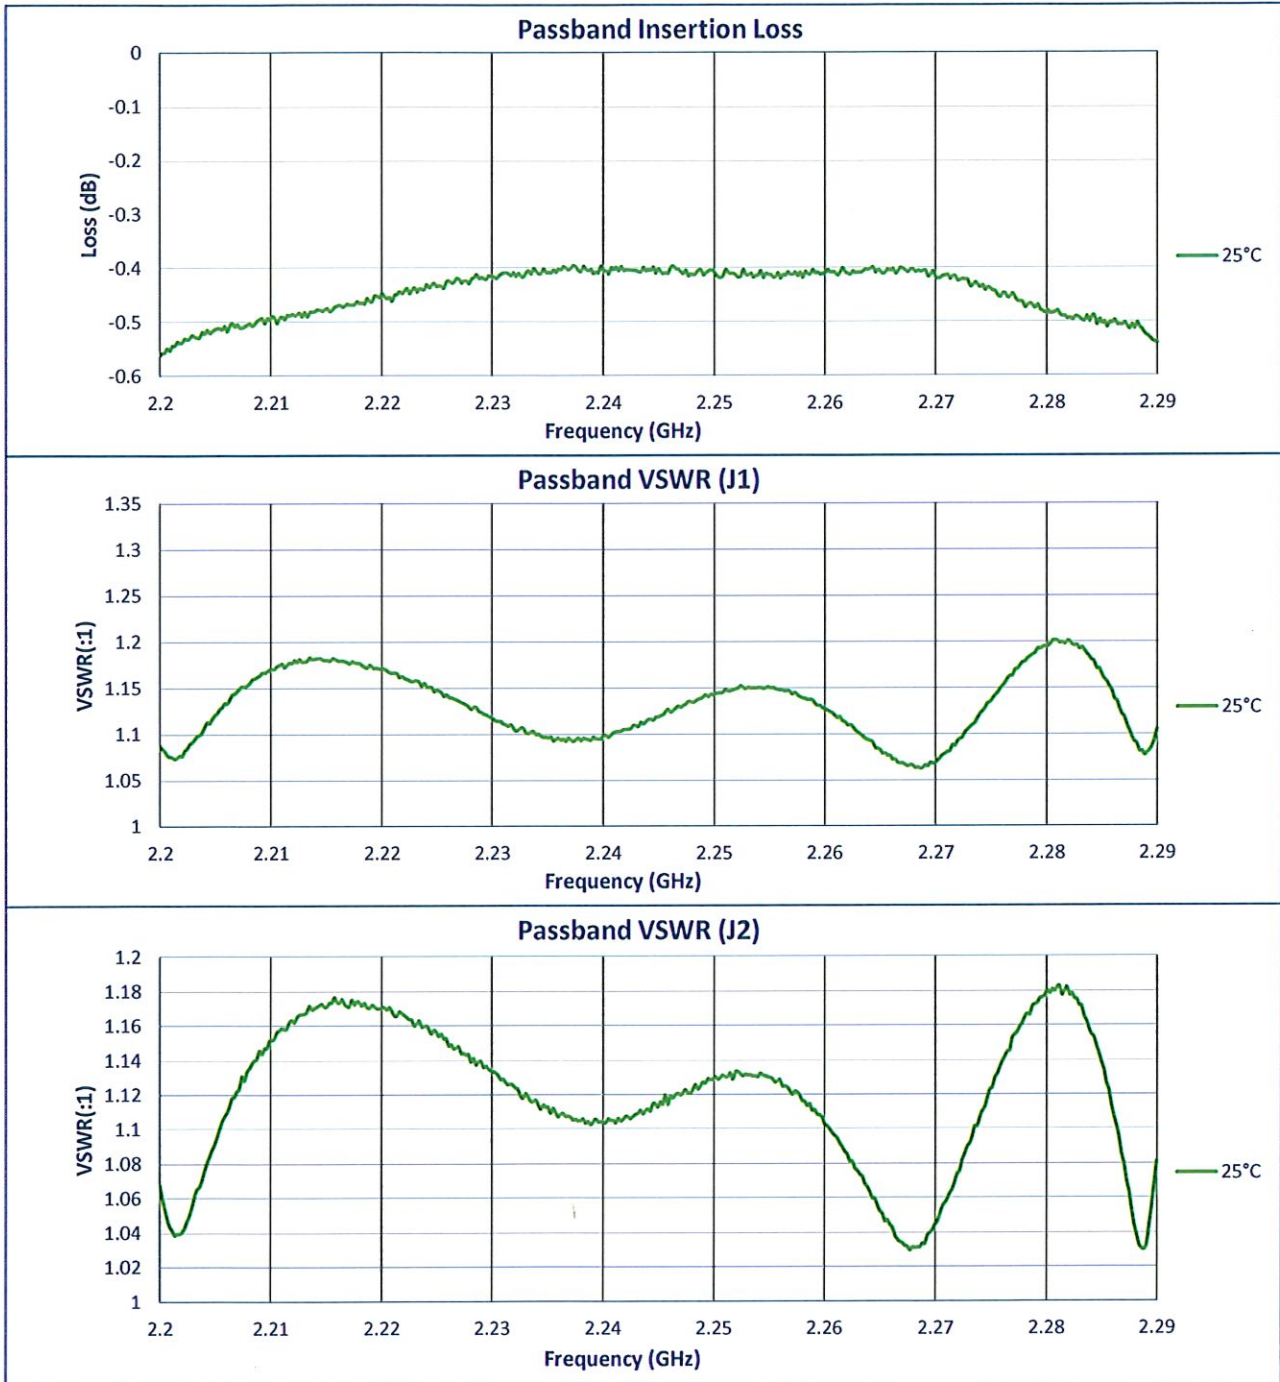

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

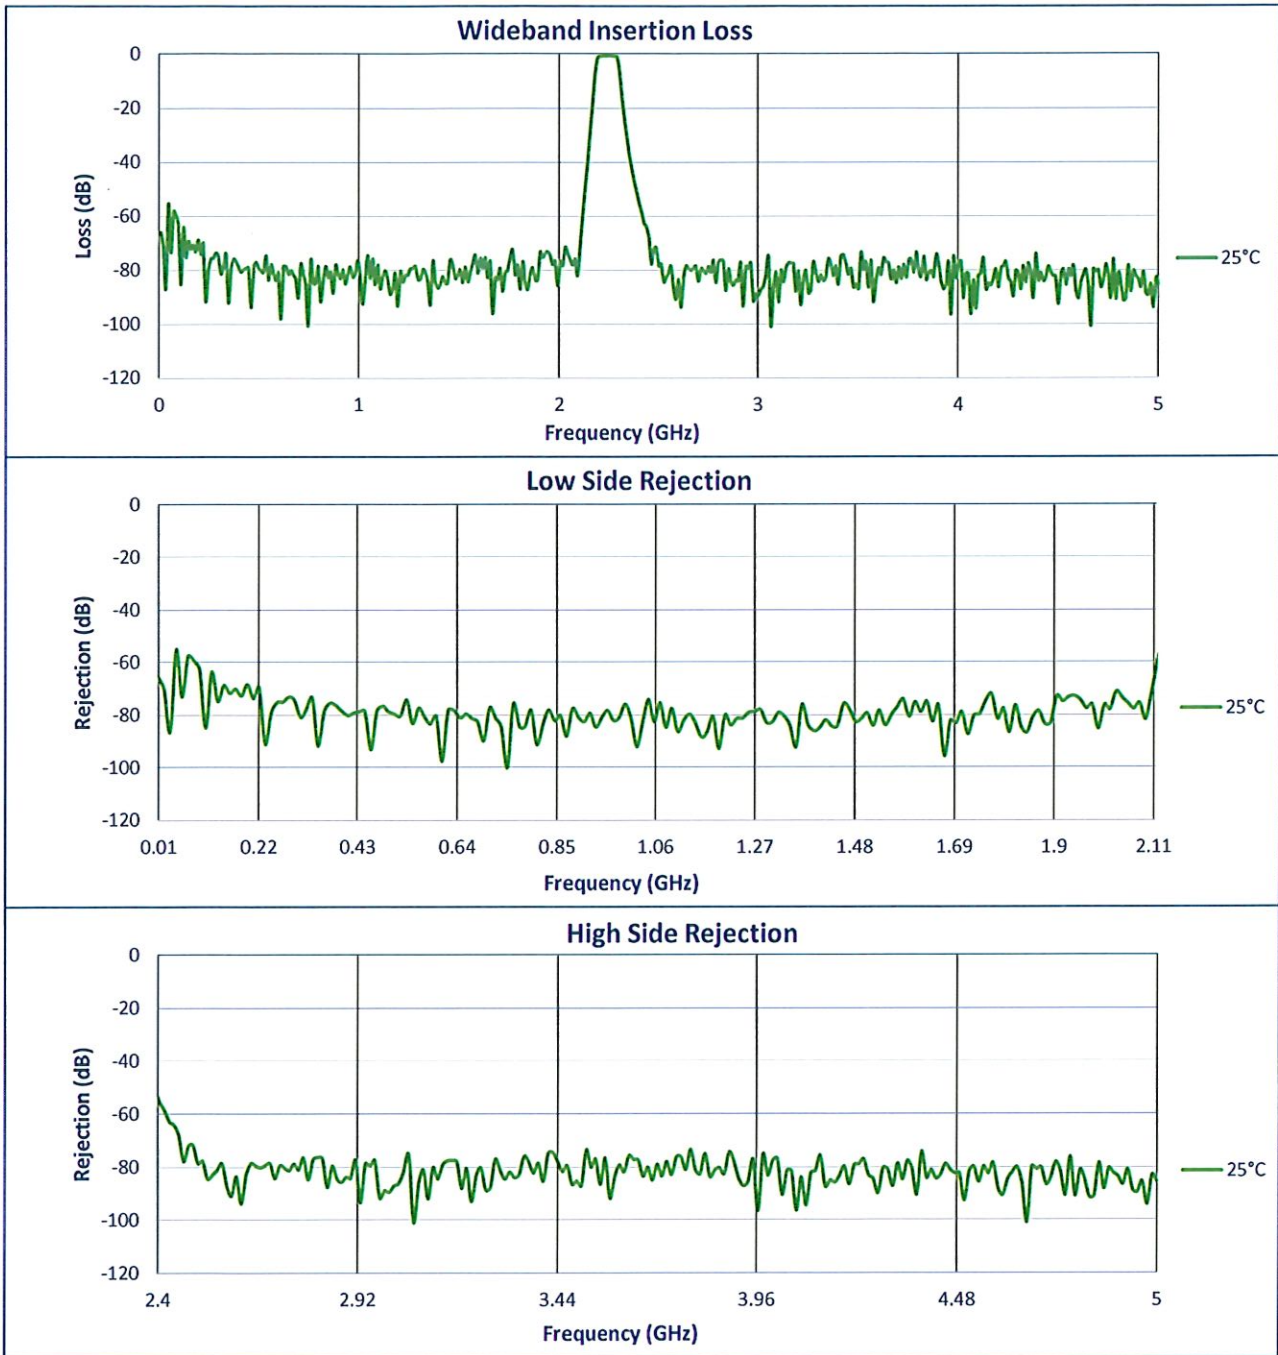

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

