



SUMMARY TEST DATA ON BPF-2D2G2D29G-5W-SFF

Customer: _____
 SO: _____
 Model No: **BPF-2D2G2D29G-5W-SFF**
 Serial No: **PL59413/2618**

Tested By: **OLIVER K**
 Temperature: **25°C**
 Date: **4/27/2026**
 Drawing No: **27653680** Rev: **A1**


| TEST ITEM | PARAMETERS | SPECIFIED VALUE | TEST RESULTS | QA/QC | |
|-----------|------------------------------|---------------------|---------------------|---------|---------|
| 1 | Passband Frequency Range | 2.2 GHz to 2.29 GHz | 2.2 GHz to 2.29 GHz | PMI QA6 | |
| 2 | Insertion Loss | 0.8 dB Max. | 0.53 dB | PMI QA6 | |
| 3 | Ripple | ±0.2 dB Max. | ±0.08 dB | | |
| 4 | VSWR | 1.3:1 Max. | 1.22:1 | | |
| 5 | Rejection @ DC to 2.11 GHz | 40 dB Min. | 54.5 dB | | |
| 6 | Rejection @ 2.4 GHz to 5 GHz | 40 dB Min. | 54.5 dB | | |
| 7 | Input Power | 5W CW Max. | 5W | | PMI QA6 |

* FOR ALL OTHER SPECIFICATIONS, PLEASE SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE


QA/AC Approval: Anthony Krady PMI QA6

Date: 4/29/26

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

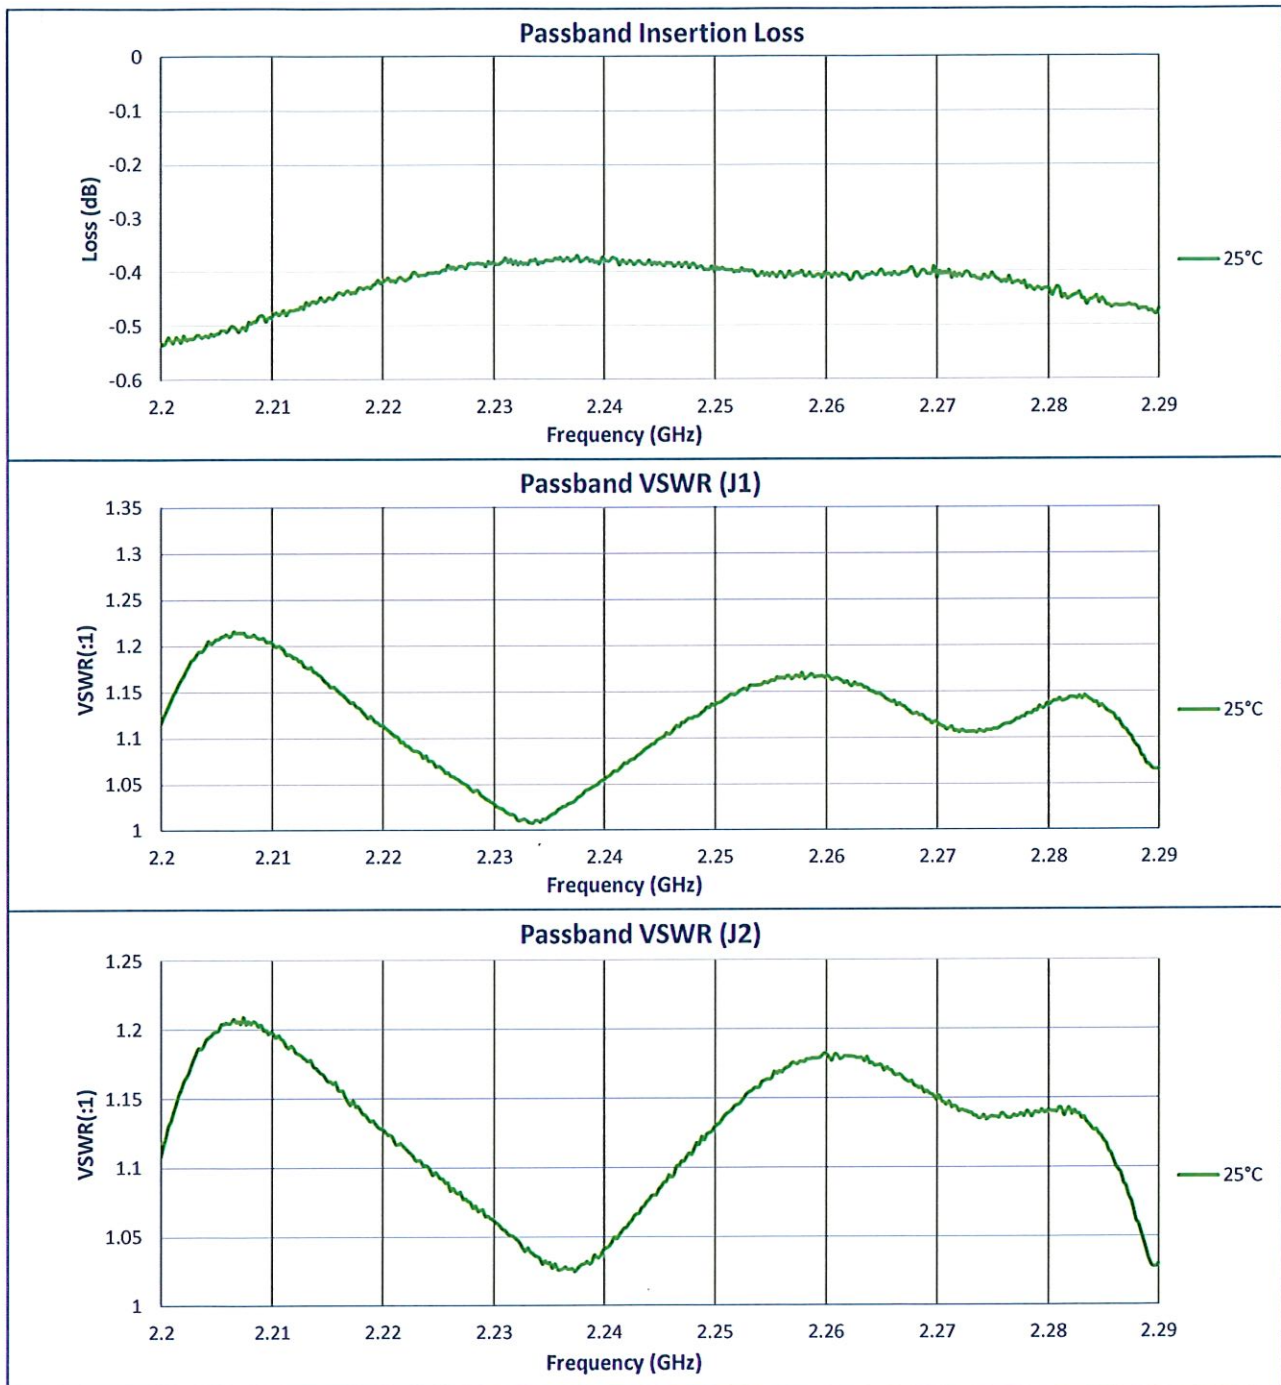

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

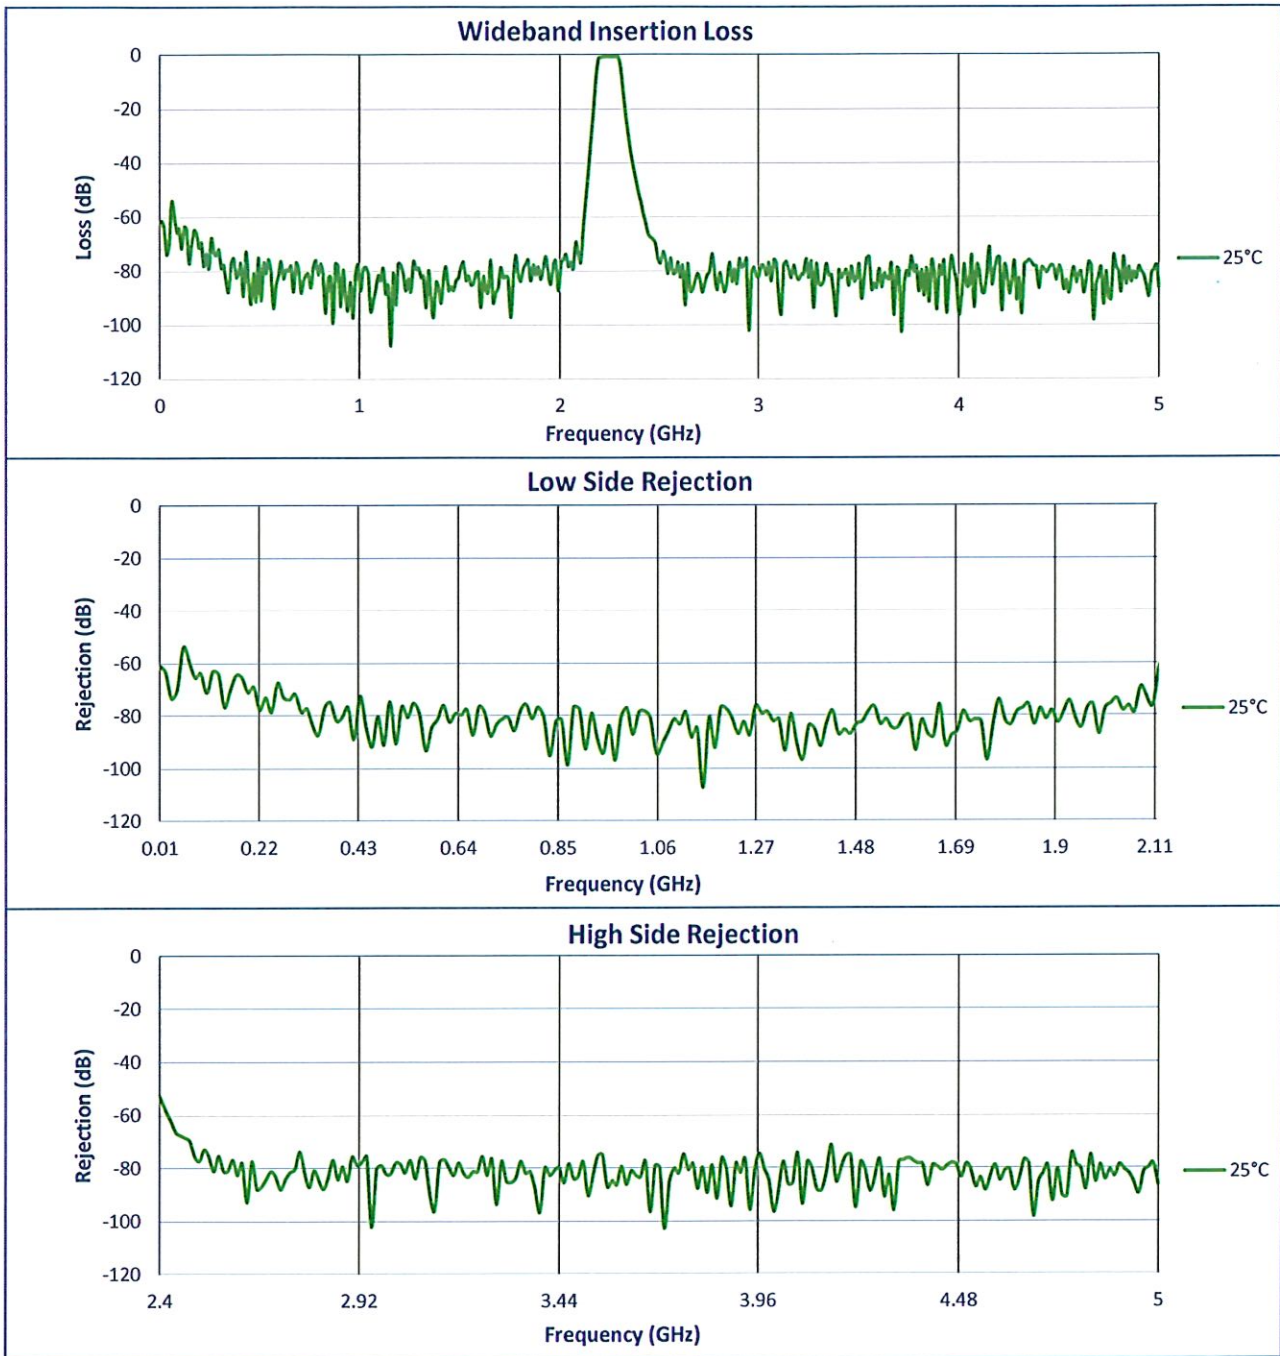

**SUMMARY TEST DATA
ON
BPF-2D2G2D29G-5W-SFF**

