

**SUMMARY TEST DATA
ON
P2T-218-60-R-1W-SFF**

Customer: _____
SO No: _____
Model No: P2T-218-60-R-1W-SFF
Serial No: PL60755/2625

Tested By: Anuar P.
Temperature: +25° C
Date: 6/19/2026
Drawing No: 26943760 Rev: B4

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2.0 GHz to 18.0 GHz	2.0 GHz to 18.0 GHz	PMI QA6
2	Insertion Loss:	2.5 dB Max.	2.15 dB See Graph	
4	Isolation:	60 dB Min.	60 dB See Graph	
5	VSWR:	2.0:1 Max.	1.87:1 In 1.8:1 Out See Graph	
6	Switching Speed:	25 ns Max.	20 ns See Typical Characteristics	
3	Operating Input Power:	1 Watt CW Max. 2W Pk, 1% DC, 100ns Max.	Pass See Typical Characteristics	
7	DC Supply:	+5 to +15 VDC @ 65 mA Max. -5 to -15 VDC @ 65 mA Max.	+5 to +15 VDC @ 13 mA -5 to -15 VDC @ 19 mA	
8	Control:	Logic Table		Pass PMI QA6
		CTL1	Function	
		0	J1-J2	
		1	J1-J3	

QA/QC Approval: _____

Anthony Hardy


PMI
QA6

Date: 6/22/26


SUMMARY TEST DATA ON P2T-218-60-R-1W-SFF

PL60755/2625

Insertion Loss

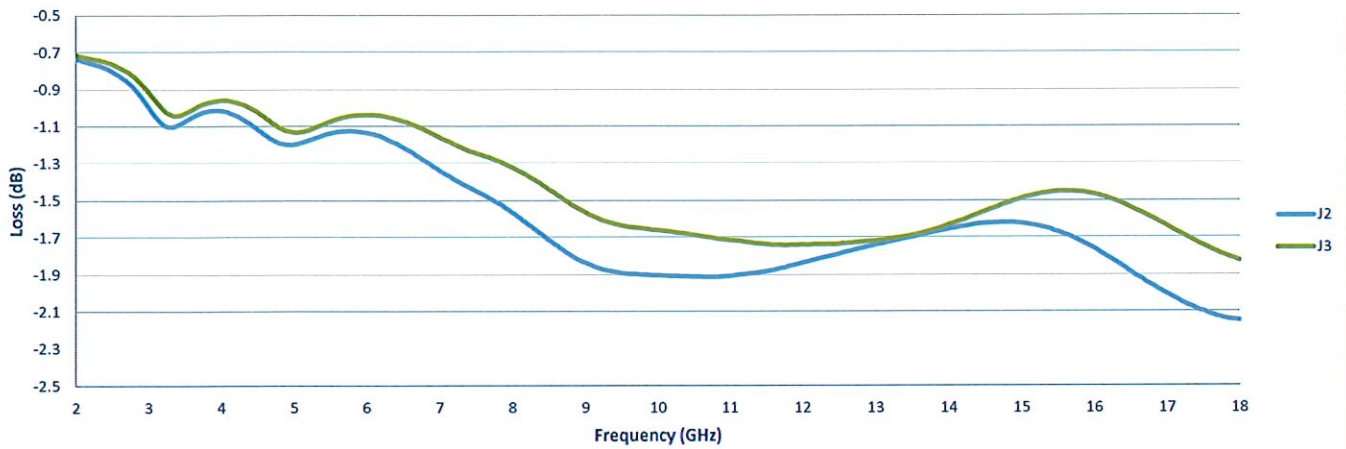

VSWR (On)

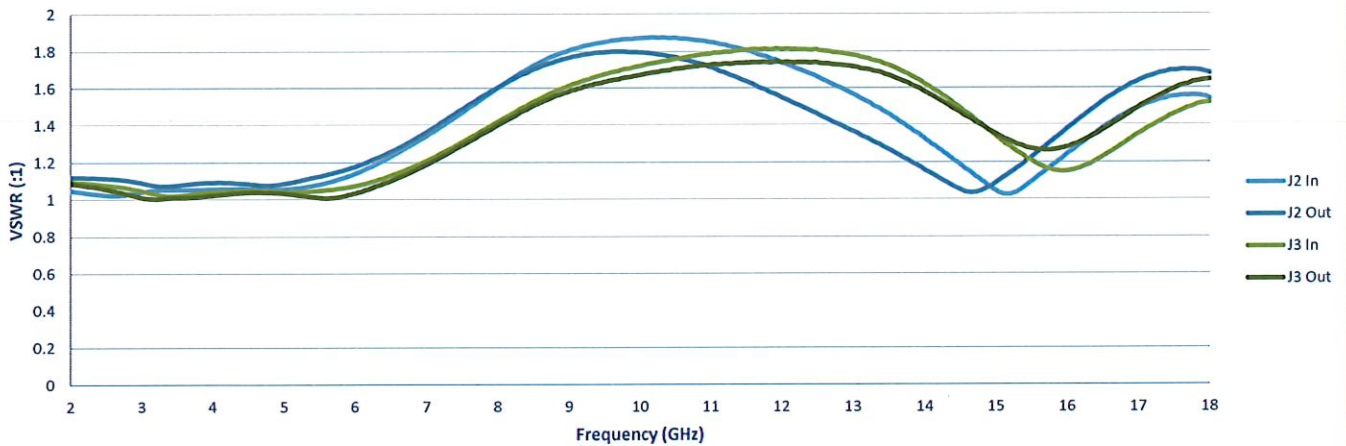

Isolation

