



Tested By: J. Fitzpatrick/K. Mansfield

Date: Monday, June 29, 2026

Temperature: +25° C


Drawing No: 27614809

Rev: A2


Programmed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
5.00	5.02	-0.02	0.37
10.00	10.02	-0.02	0.61
15.00	14.90	0.10	0.59
20.00	19.97	0.03	0.50
25.00	24.90	0.10	0.47
30.00	30.02	-0.02	0.55
35.00	34.93	0.07	0.64
40.00	39.96	0.04	0.85
45.00	44.97	0.03	1.19
50.00	50.00	0.00	1.55
55.00	55.00	0.00	1.80
60.00	60.05	-0.05	1.99

Date: 6/30/26


Insertion Loss

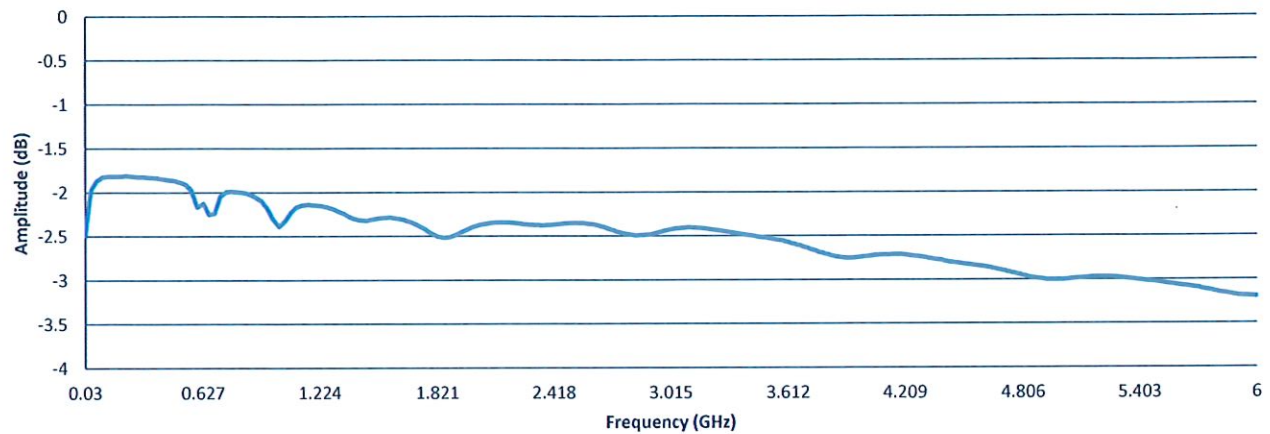


Return Loss

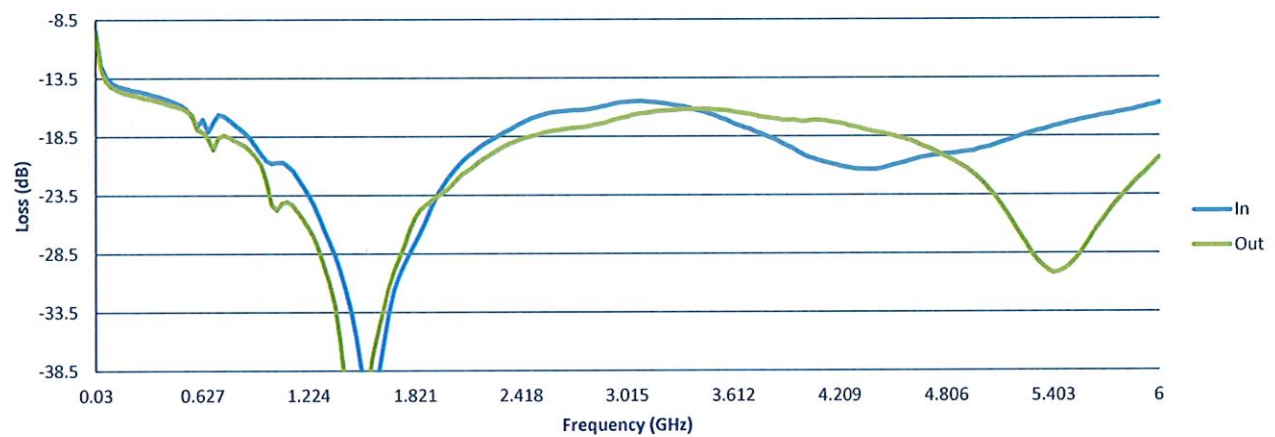


Attenuation vs. Frequency (Small Bits)

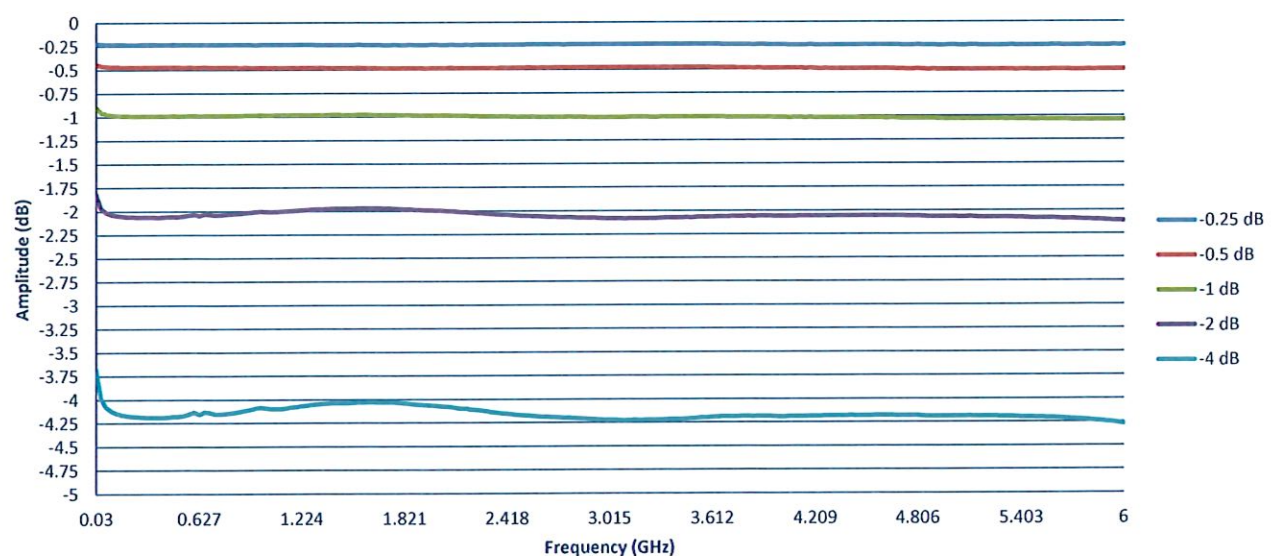

Attenuation vs. Frequency (All Bits)

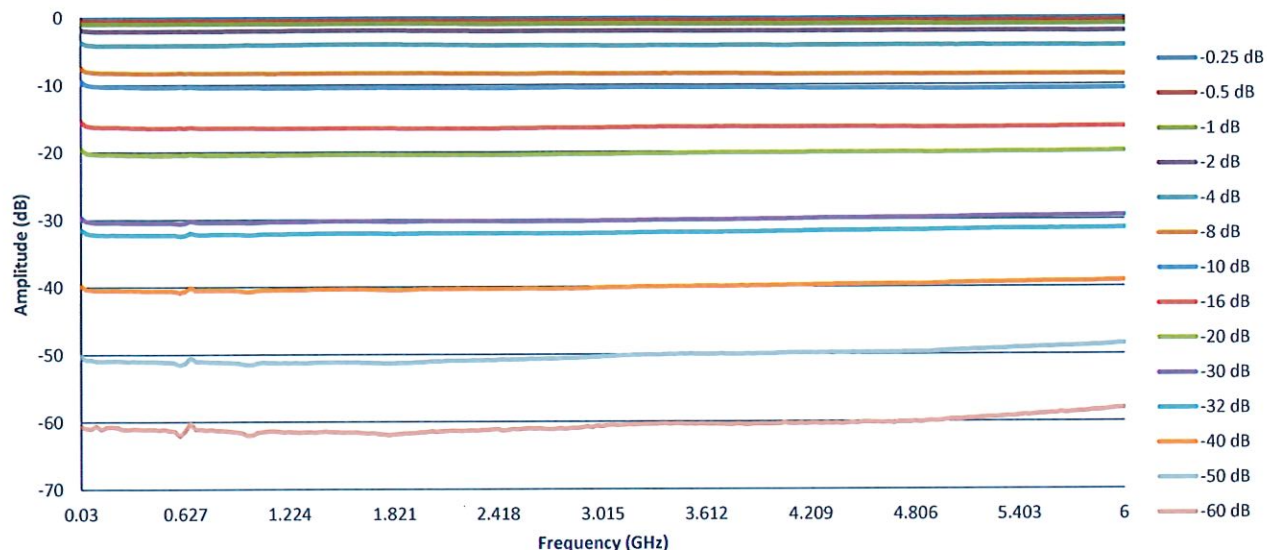

Flatness

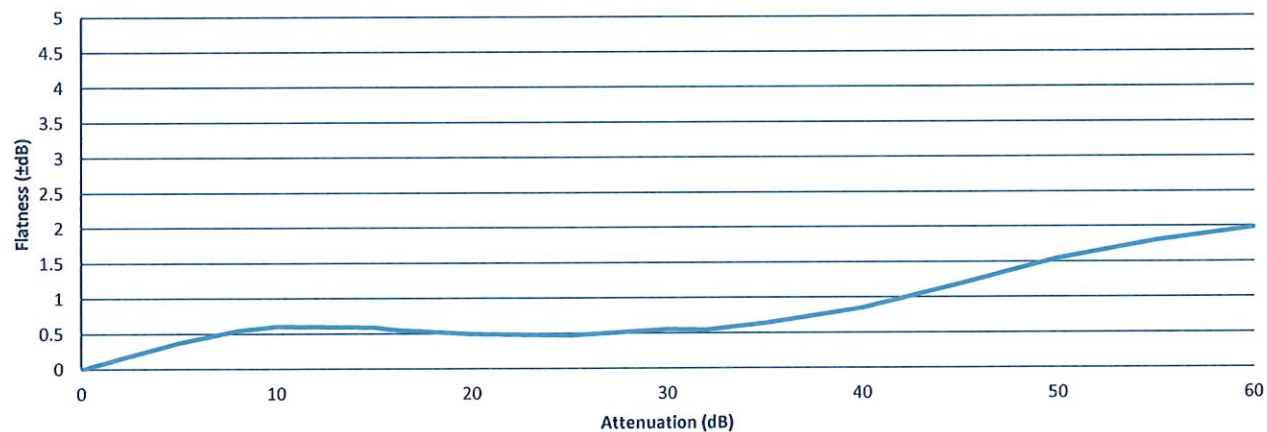

Accuracy

