



SUMMARY TEST DATA ON DTA-30M6G-60-CD-1

Customer: _____
Job No: _____
Model No: DTA-30M6G-60-CD-1
Serial No: PL60926/2627

Tested By: J. Fitzpatrick/K. Mansfield
Date: Monday, June 29, 2026
Temperature: +25° C
Drawing No: 27614809 Rev: A2

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	RESULTS	QA QC
1	Frequency Range:	30 MHz – 6 GHz	30 MHz – 6 GHz	PMI QA6
2	Mean Attenuation Range:	60 dB	63.9 dB See Plot	
3	Insertion Loss:	4.0 dB Max.	3.22 dB See Plot	
4	Return Loss:	-8.5 dB Max.	-9.15 dB	
5	Attenuation Flatness:	±1.0 dB Typ. @ 10 dB ±1.5 dB Typ. @ 20 dB ±3.0 dB Typ. @ 40 dB ±5.0 dB Typ. @ 60 dB	±0.4 dB ±0.46 dB ±0.39 dB ±1.79 dB See Plot	
6	Accuracy of Attenuation:	±1.0 dB Typ. 0 dB to 30 dB ±1.3 dB Typ. 30 dB to 50 dB ±1.5 dB Typ. 50 dB to 60 dB	±0.12 dB ±0.08 dB ±0.02 dB See Plot	
7	Switching Speed:	50 µs Max.	See Typical Characteristics	
8	Monotonicity:	Verify	Pass	
9	DC Supply:	+12 VDC @ 155 mA Max.	77 mA	PMI QA6

Programed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
0.25	0.24	0.01	0.02
0.50	0.49	0.01	0.04
1.00	0.99	0.01	0.07
2.00	1.98	0.02	0.14
4.00	3.98	0.02	0.23
8.00	7.97	0.03	0.36
16.00	15.96	0.04	0.37
32.00	31.93	0.07	0.57
63.75	63.92	-0.17	0.39


Programed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
5.00	4.97	0.03	0.27
10.00	10.00	0.00	0.40
15.00	14.92	0.08	0.39
20.00	20.00	0.00	0.46
25.00	24.94	0.06	0.59
30.00	29.99	0.01	0.61
35.00	34.92	0.08	0.48
40.00	39.97	0.03	0.39
45.00	44.99	0.01	0.46
50.00	50.01	-0.01	0.72
55.00	55.02	-0.02	1.25
60.00	60.02	-0.02	1.79

QA/QC Approval: Anthony Karoly


PMI
QA6

Date: 6/30/26

Insertion Loss

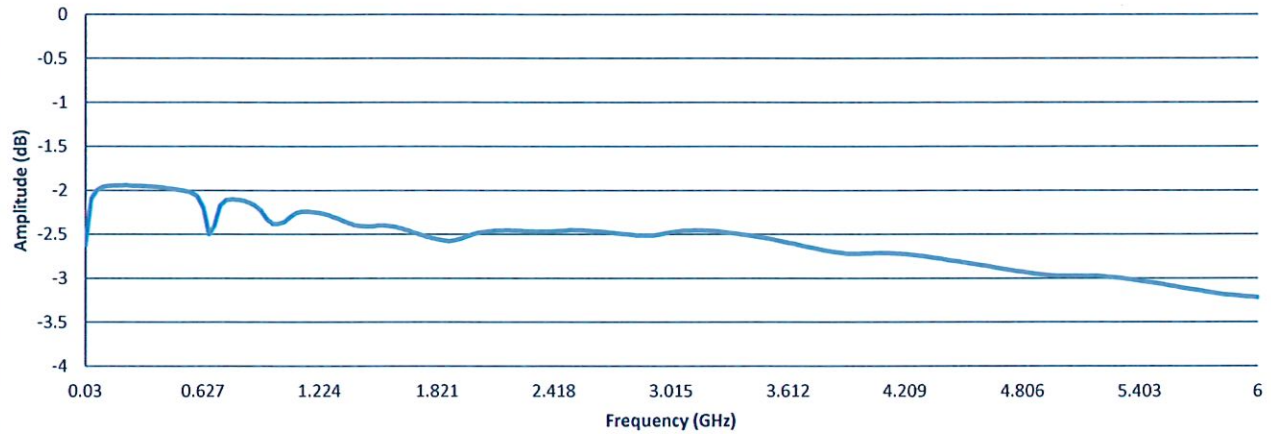

Return Loss

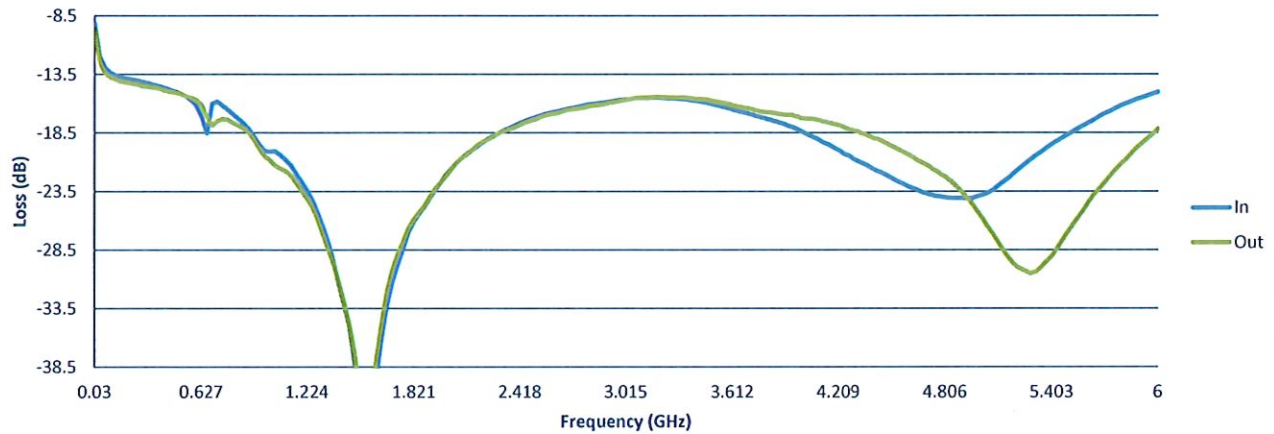

Attenuation vs. Frequency (Small Bits)

