



Tested By: J. Fitzpatrick/K. Mansfield

Date: Wednesday, July 1, 2026

Temperature: +25° C


Drawing No: 27653940 Rev: A1

Programed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
0.25	0.24	0.01	0.02
0.50	0.50	0.00	0.04
1.00	1.01	-0.01	0.09
2.00	2.00	0.00	0.17
4.00	3.97	0.03	0.26
8.00	7.97	0.03	0.43
16.00	15.96	0.04	0.54
32.00	31.95	0.05	0.82
63.75	63.70	0.05	0.51


Programed Attenuation	Attenuation	Accuracy of Attenuation	Flatness dB
dB	dB	dB	±dB
5.00	4.96	0.04	0.32
10.00	9.98	0.02	0.46
15.00	14.90	0.10	0.51
20.00	20.00	0.00	0.61
25.00	24.97	0.03	0.71
30.00	30.00	0.00	0.76
35.00	34.98	0.02	0.79
40.00	40.01	-0.01	0.73
45.00	44.94	0.06	0.62
50.00	49.95	0.05	0.56
55.00	54.98	0.02	0.60
60.00	60.03	-0.03	1.23

Date: 7/13/26


Insertion Loss

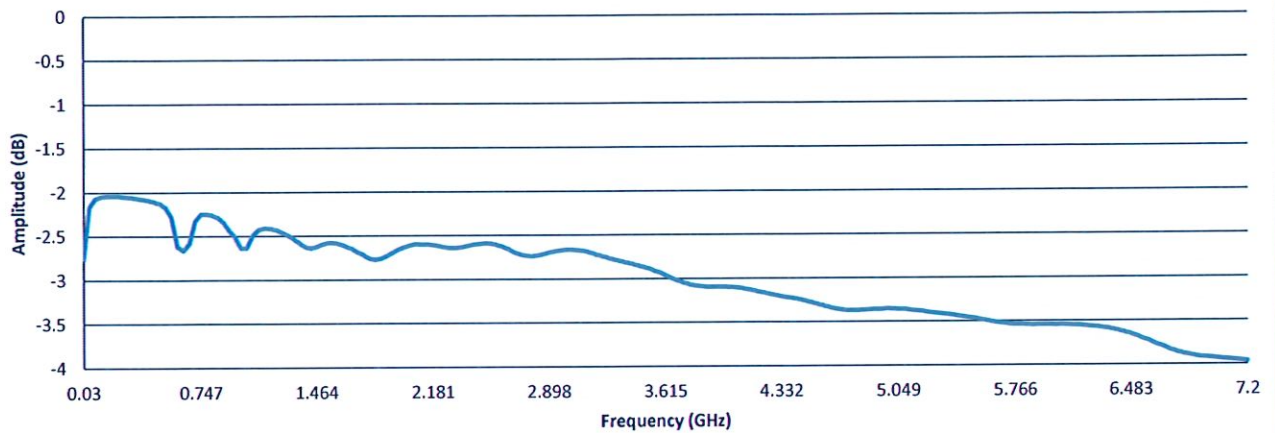


Return Loss

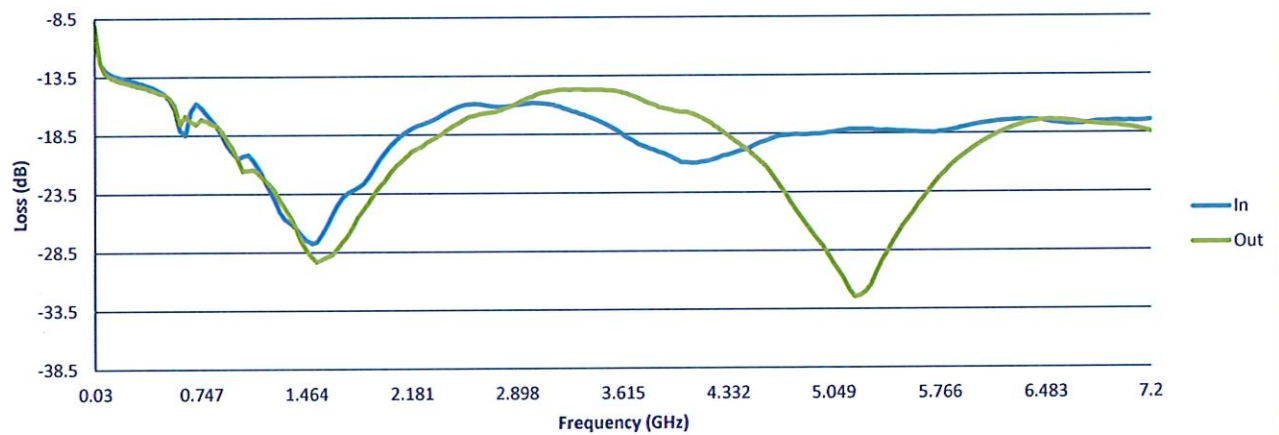


Attenuation vs. Frequency (Small Bits)

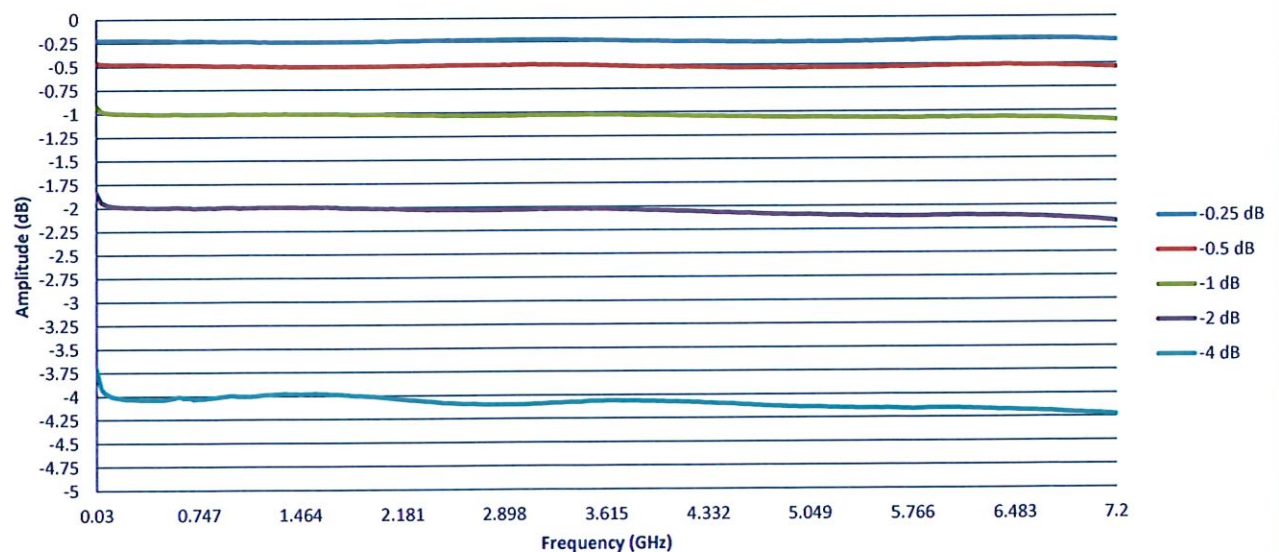

Attenuation vs. Frequency (All Bits)

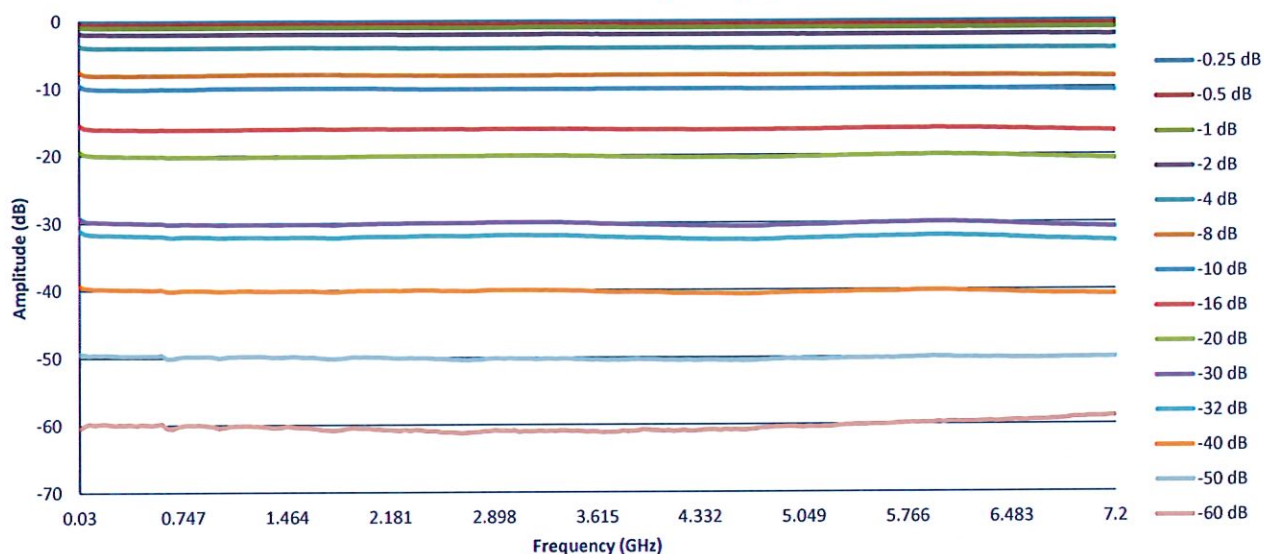

Flatness

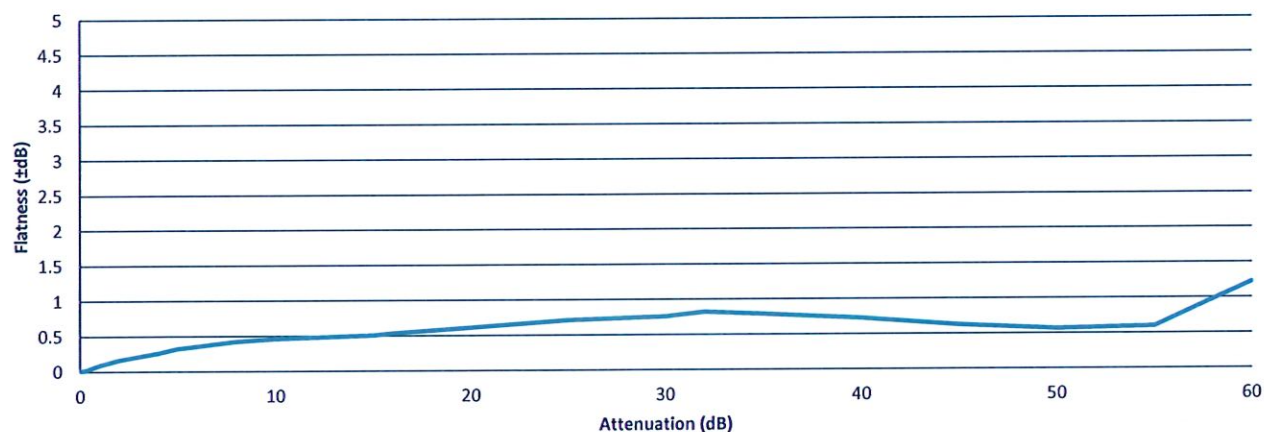

Accuracy

