



SUMMARY TEST DATA ON LM-10M18G-16-20W-RAD-OPT28

Customer: _____
 SO No: _____
 Model No: LM-10M18G-16-20W-RAD-OPT28
 Serial No: PL61005/2627

Tested By: OLIVER K
 Temperature: +25°C
 Date: 7/1/2026
 Drawing No: 27647360 REV: A1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	2 GHz to 8 GHz	2 GHz to 8 GHz	PMI QA5
2	Insertion Loss:	1.2 dB Max. @ -10 dBm Input Power	0.46 dB See Graph	
3	Leakage Power:	+15 dBm Typ.	Pass See Typical Characteristics	
4	Impedance:	50 Ohms	Pass See Typical Characteristics	
5	Recovery Time (3 dB):	250 ns Max.	Pass See Typical Characteristics	
6	VSWR:	1.7:1 Max. @ -10 dBm Input Power	1.56:1 In 1.55:1 Out See Graph	
7	RF Power Handling:	20 W CW Max.	Pass See Typical Characteristics	
		500W Peak Max. (10 μ s PW, 1kHz PRF)	Pass See Typical Characteristics	
8	Limiting Threshold:	+ 5 dBm Nom. (1 dB Compression)	+ 10 dBm See Graph	PMI QA5

QA/QC Approval:

Jordan Rydal

Date:


7/31/26

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
 Email: sales@pmi-rf.com


SUMMARY TEST DATA ON LM-10M18G-16-20W-RAD-OPT28

PL61005/2627

Insertion Loss

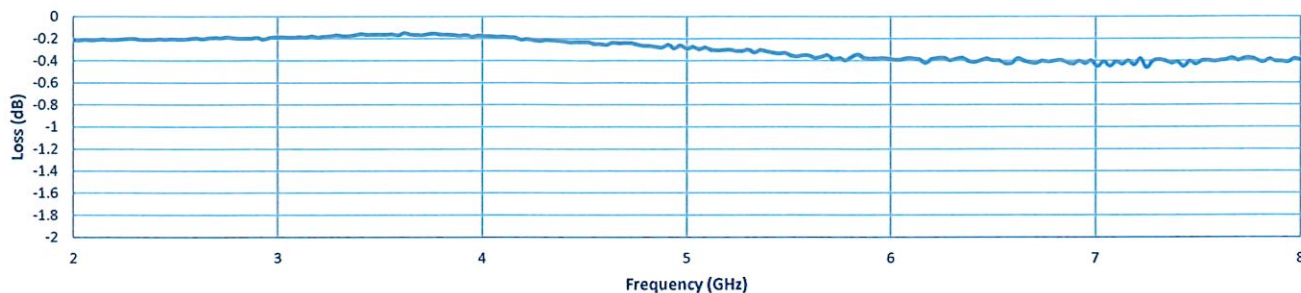

VSWR

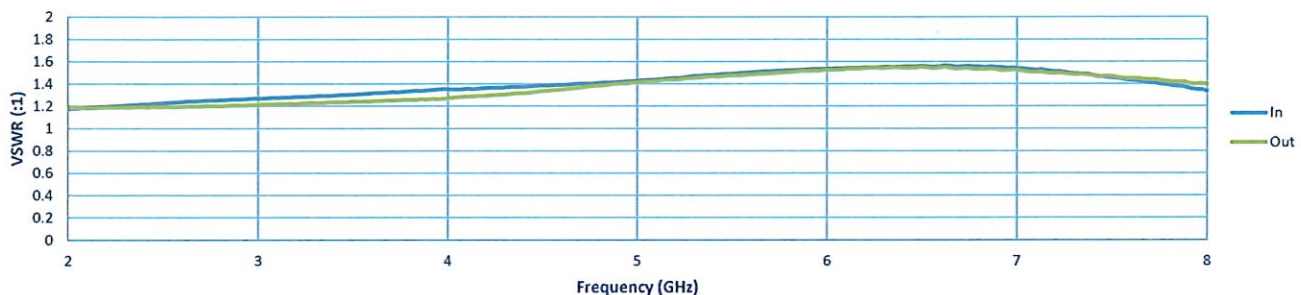

Limiter Response with Frequency

