

**SUMMARY TEST DATA
ON
PTB-60-120-5R0-10-220-VAC-SFF**

61182


Customer: _____ SO No: _____ Model No: <u>PTB-60-120-5R0-10-220-VAC-SFF</u> Serial No: <u>61182</u> Part No: _____	Tested By: <u>K. Mansfield</u> Temperature: <u>+25°C</u> Date: <u>03/30/16</u> Drawing No: <u>27628027</u> Rev: <u>A1</u>
---	---

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Frequency Range:	1.0 TO 20.0GHz	1.0 to 20.0 GHz (See Plot)	
2	Gain:	60dB Typ	64dB (See Plot)	
3	Gain Flatness	±3.0dB Typ	±2.5dB (See Plot)	
4	Noise Figure:	5.0dB Max	4.7dB (See Plot)	
5	OP1dB:	+10dBm Min	+11dBm (See Plot)	
6	VSWR In/Out:	2.0:1 Max	1.6:1 In 2.0:1 Out (See Plot)	
7	AC Voltage Supply:	220 - 230VAC	Pass	


QA/QC Approval: _____ **Date:** _____

**SUMMARY TEST DATA
ON
PTB-60-120-5R0-10-220-VAC-SFF**

61182

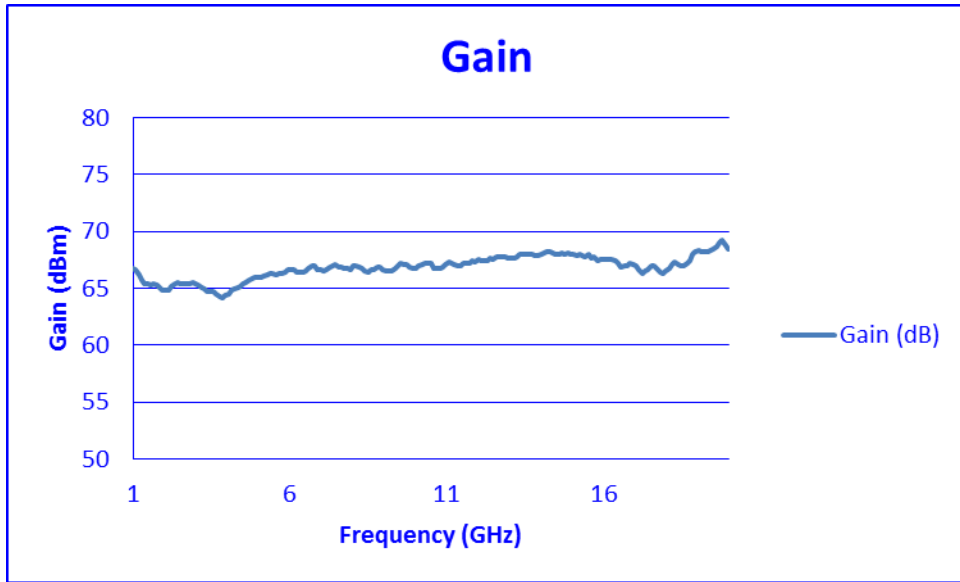

Noise Figure:

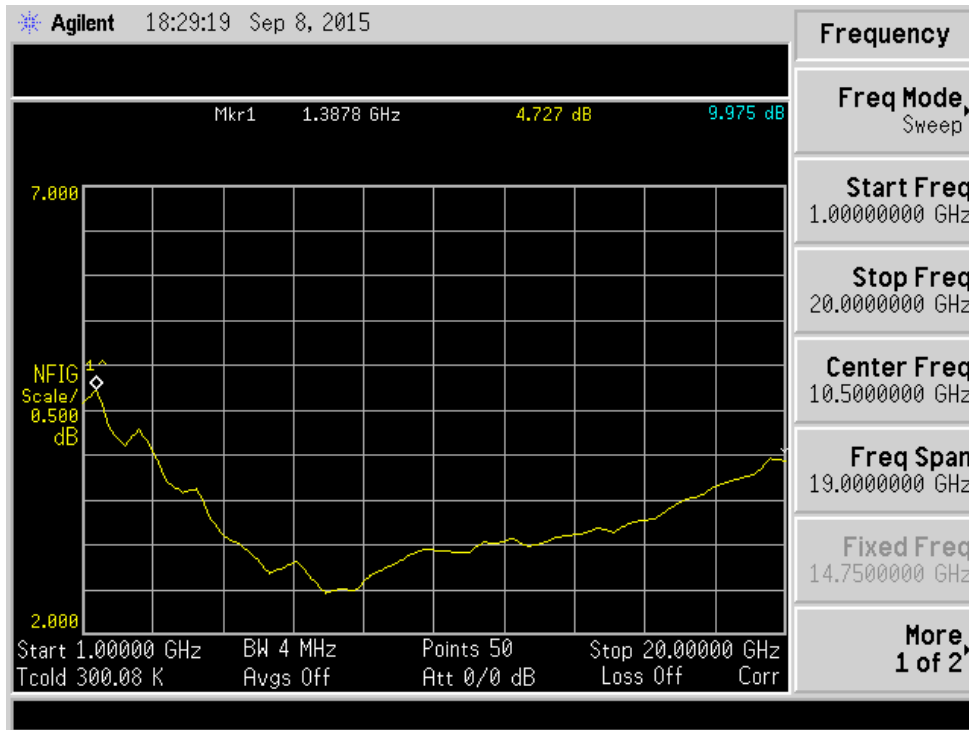

**SUMMARY TEST DATA
ON
PTB-60-120-5R0-10-220-VAC-SFF**

61182

